



Mr.Maderia:




LSB
Funtres Solher Netener

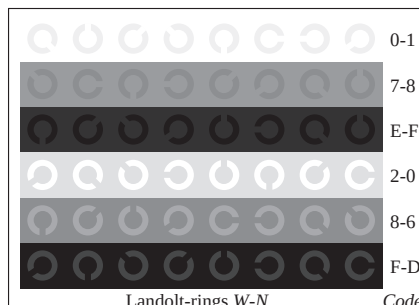

Nam liber tempor cum soluta nobis eleifend option cogue nihil consequat, velillum. Dolore eu zril feugiat nulla facilisis at vero eros accumsan et iustó odio dignissim qui blandit praesent lutatum ril lobortis nisl ut aliquip exea commodo consequat. Duis autem vel eum irfure dolor in hendreritin vulputate velit esse molestie tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim vêniam, quis nostrud exerci tation ullamcorper suscipit lotis nisl ut aliquip ex ea commodo con-sequat. Lorem ipsum dolor sit.


Amet,consectetur adipiscing elit, sēd diam nonummy nibh veniam,
recneps adipiscing elit, sed diam nonummy nibtil laoreet dolore magna
aliam erat volutpat. Ut wisi enim minim veniam, quisient nostrud. Soluta
nobis eleifend optn cogue nihil imerdiet domg id quod mzim plerat facer
posim aum. Lorem ipsm dolor sit amet, consectetur. Duis autem vel eum
iriure dolor in hendreritin vulputate velit esse ea commodo molestie.





L^* / Y (absolute)	18,0/2,5	23,1/3,8	28,2/5,5	33,3/7,7	38,5/10,3	43,6/13,6	48,8/17,4	54,0/21,9	59,1/27,2	64,3/33,2	69,5/40,0	74,7/47,8	79,8/56,5	85,0/66,1	90,2/76,8	95,4/88,6
No. and Hex code	00,F	01,E	02,D	03,C	04,B	05,A	06,9	07,8	08,7	09,6	10,5	11,4	12,3	13,2	14,1	15,0
$L^*_{CIE LAB,r}$ (relative)	w* 0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

Stephen J. Singel
Demperta Aminerimum
Labanda Sinpat Abarress


SJS:dwg

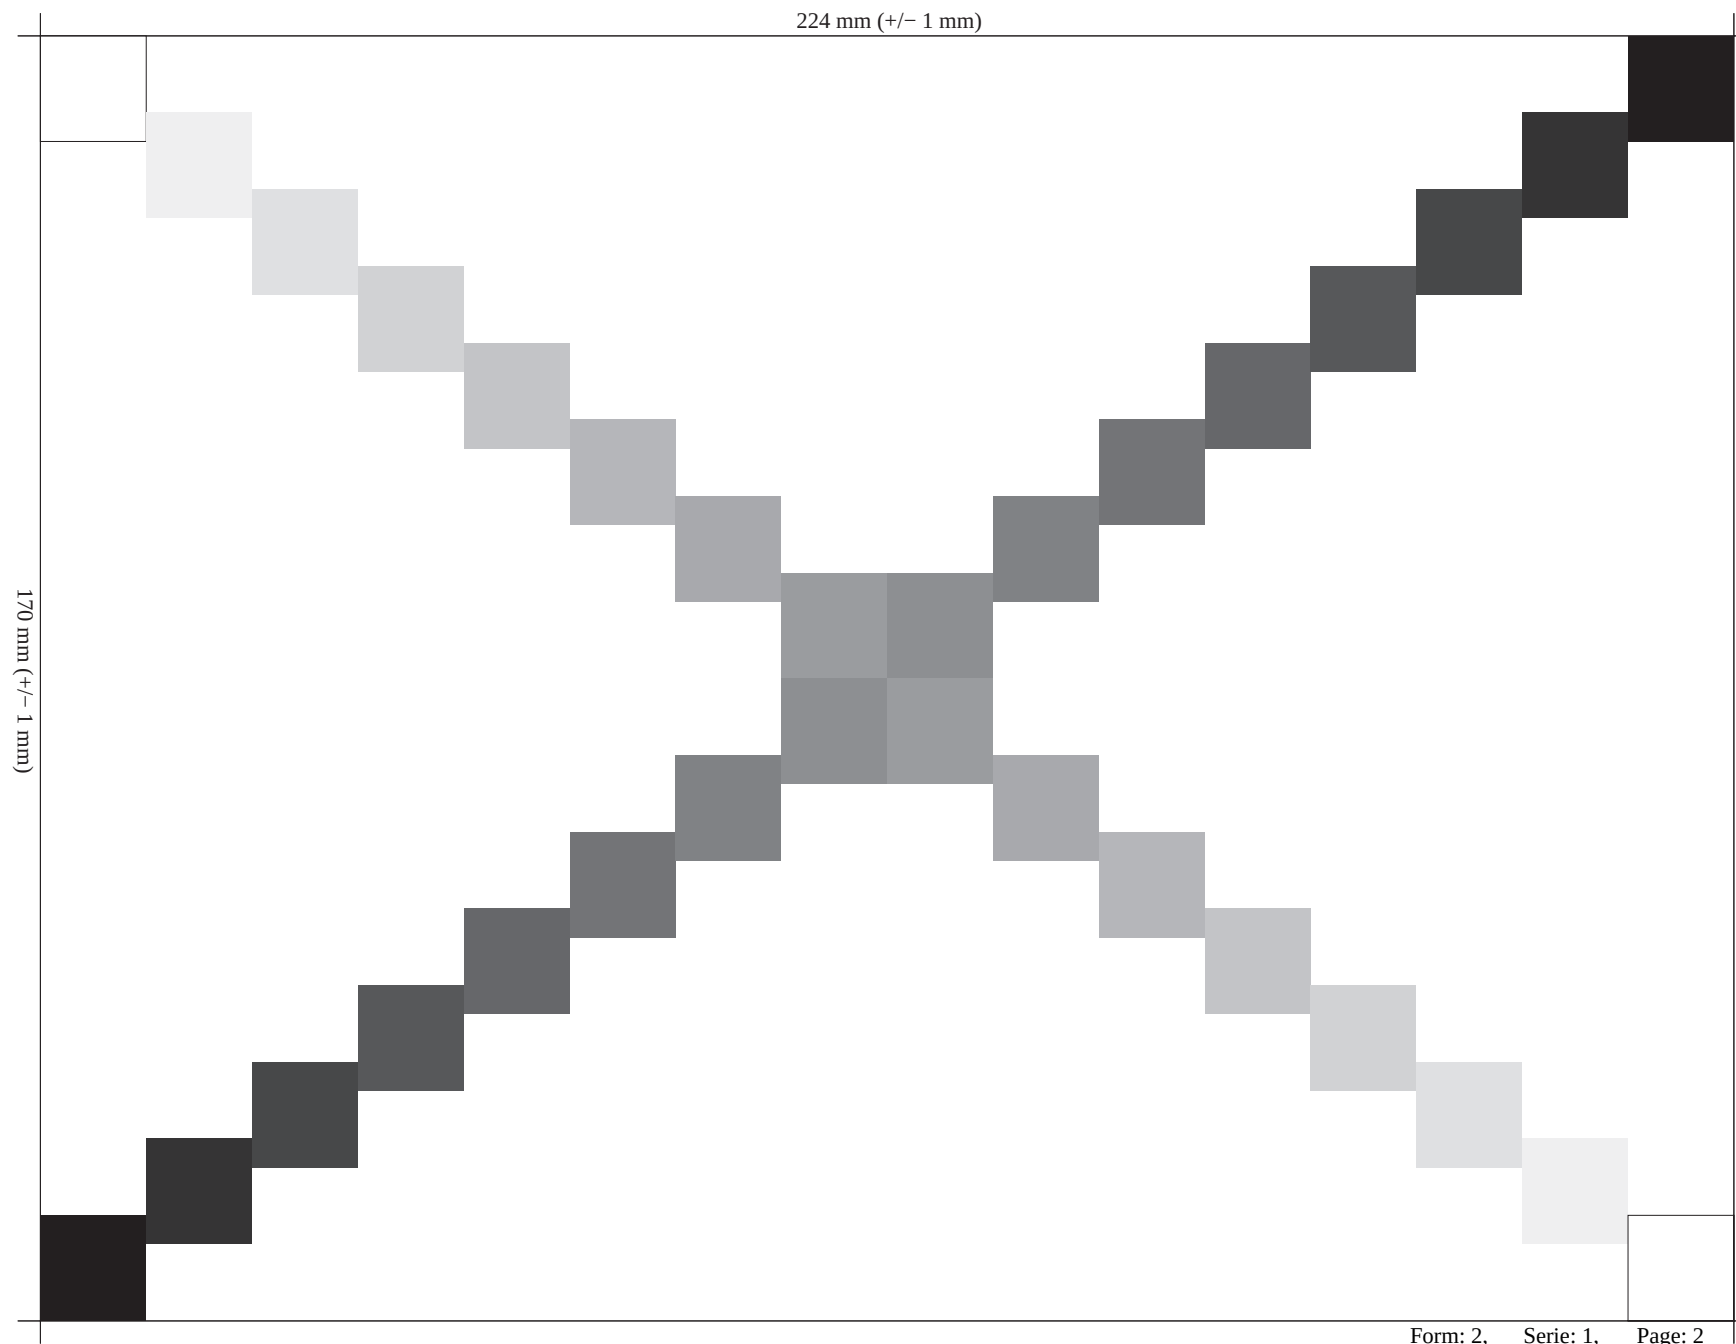

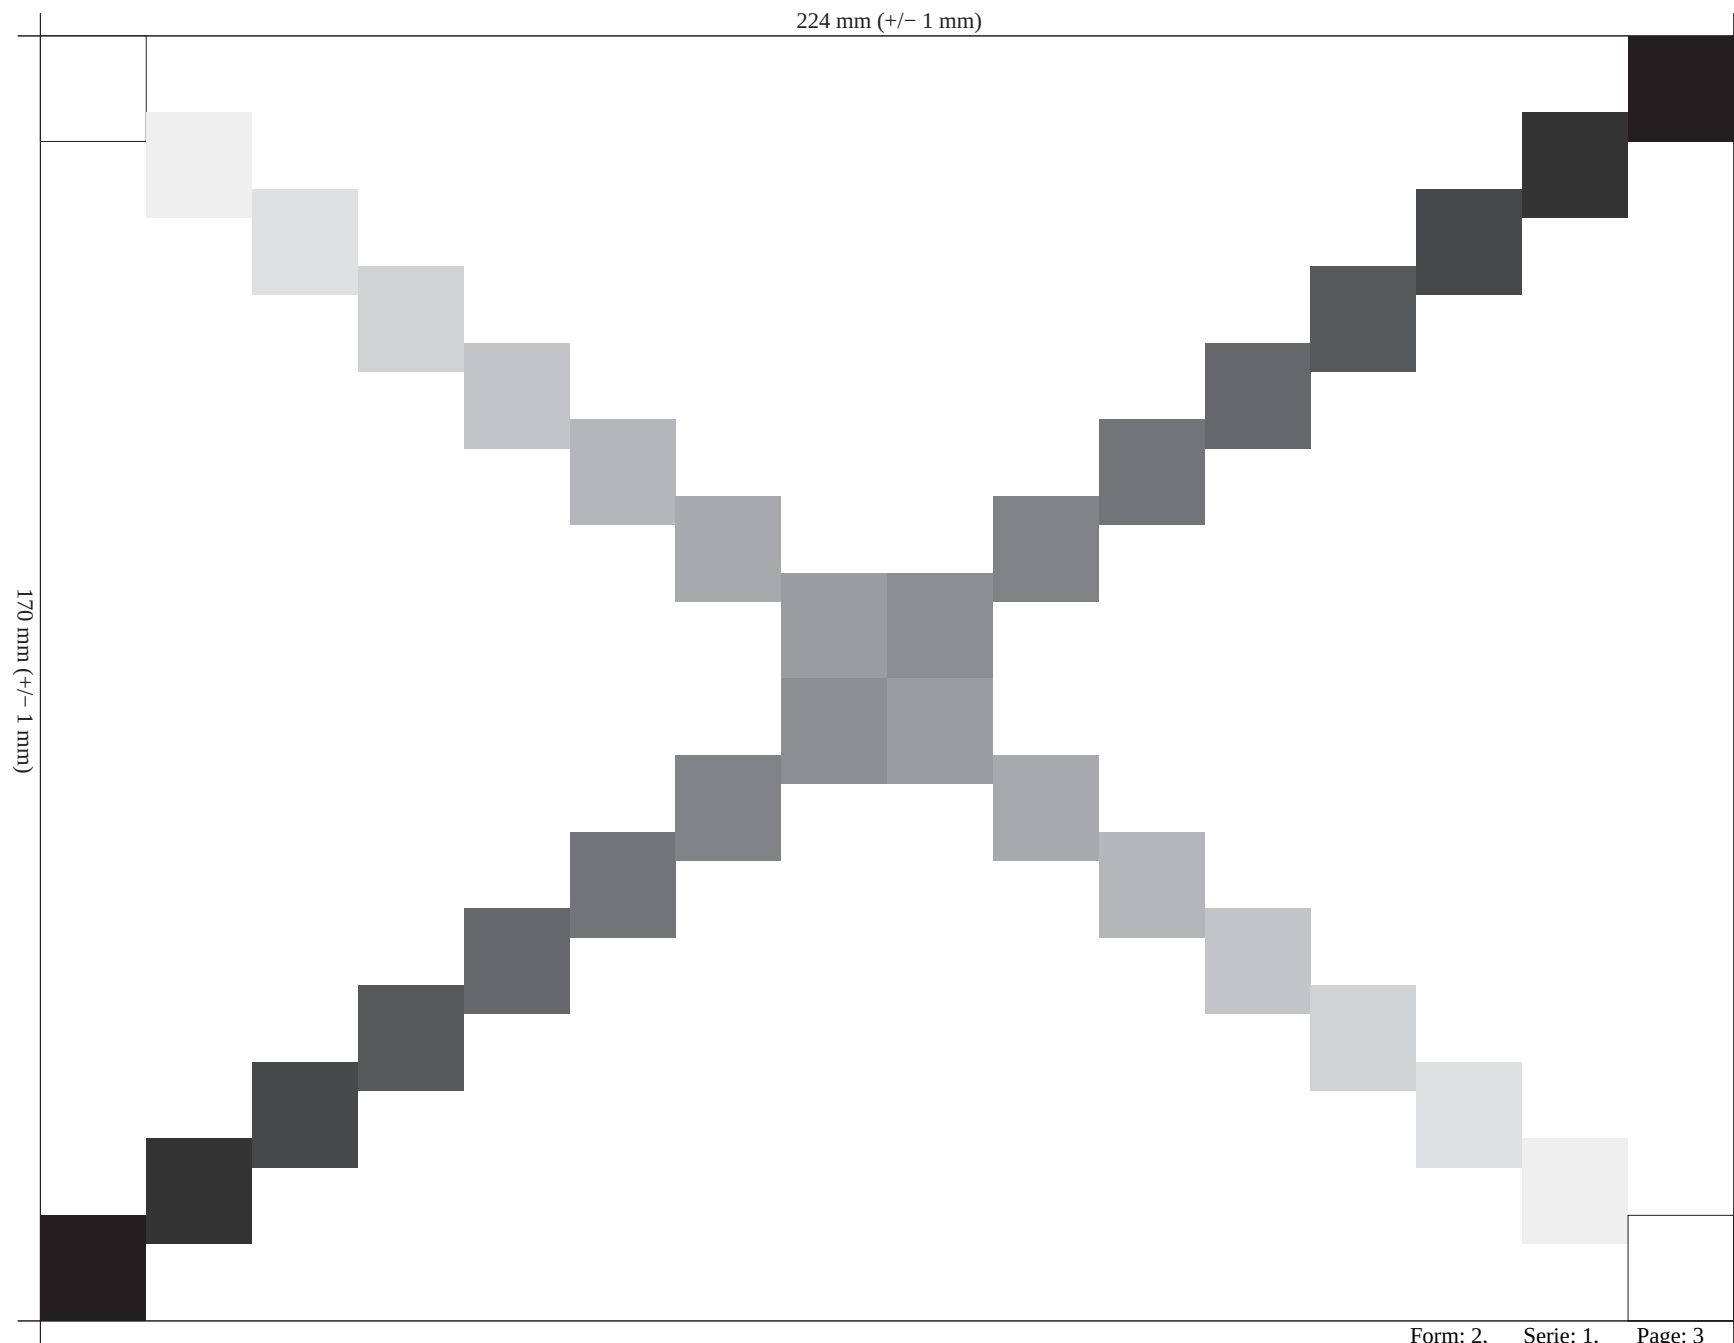


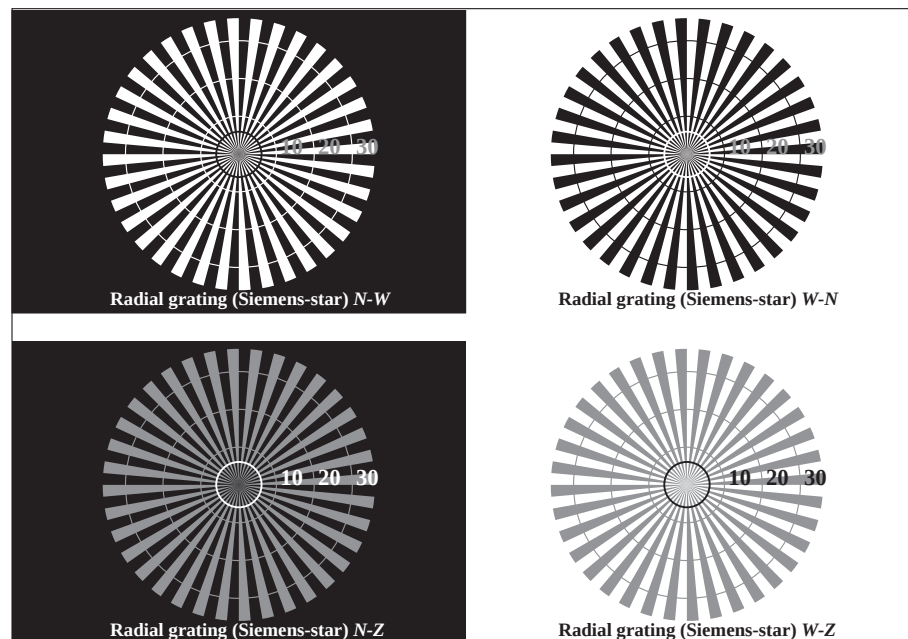

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

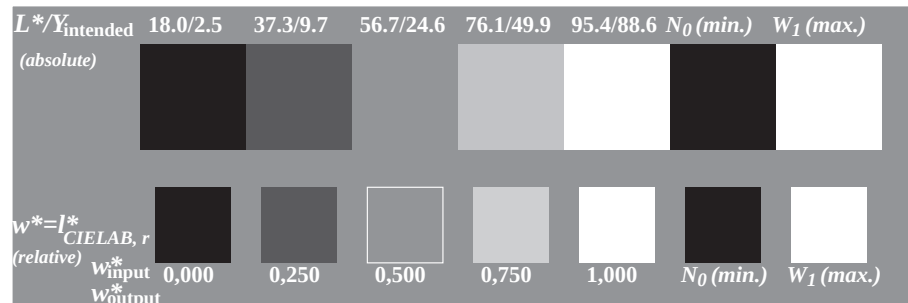

Picture C2: 5 visual equidistant L*-grey steps + N0 + W1; PS operator: 000n* setcmykcolor

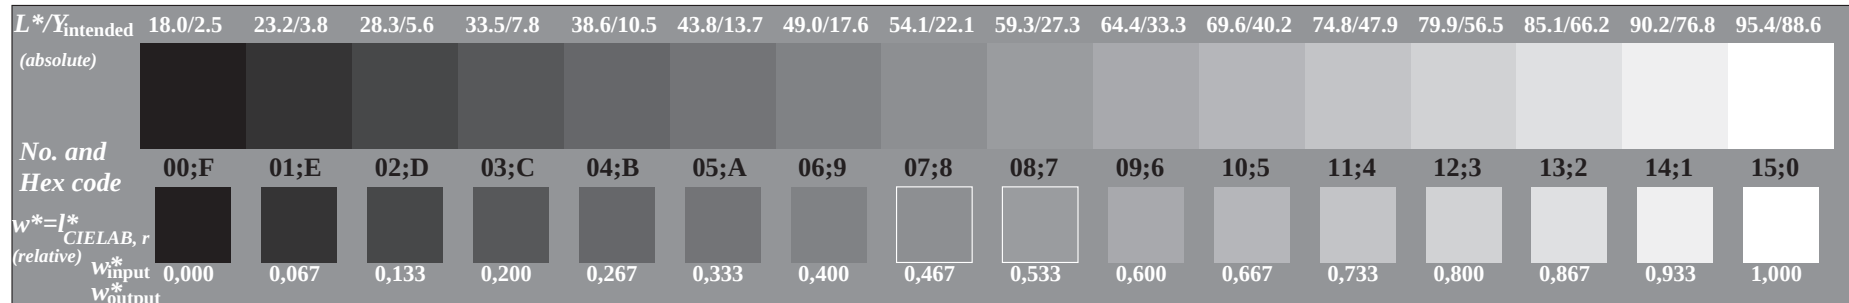


Picture C3: 16 visual equidistant L*-grey steps; PS operator: 000n* setcmykcolor


ISO/IEC 19752-test chart, form 3
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: cmy0*/000n* setcmykcolor


Form: 3, Serie: 1, Page: 4

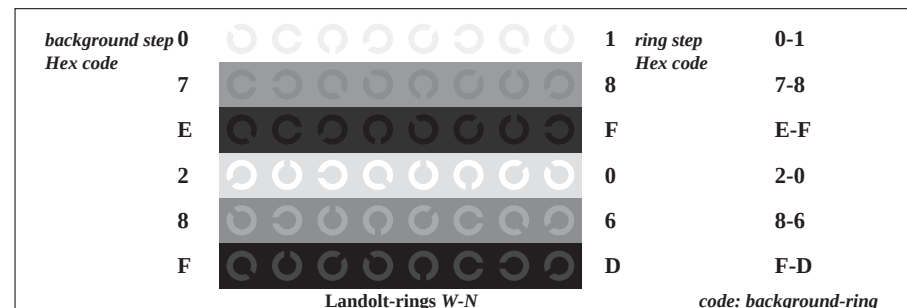


Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

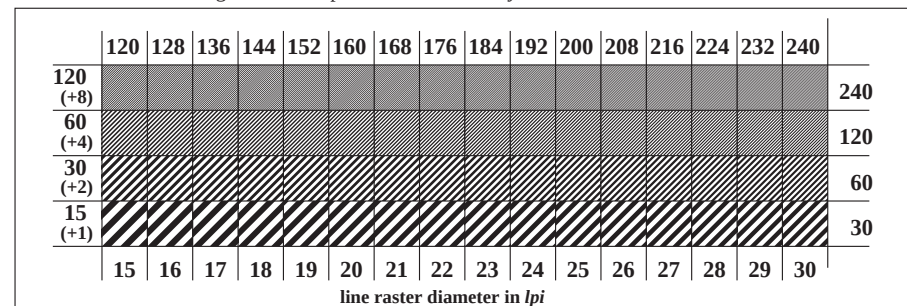

Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

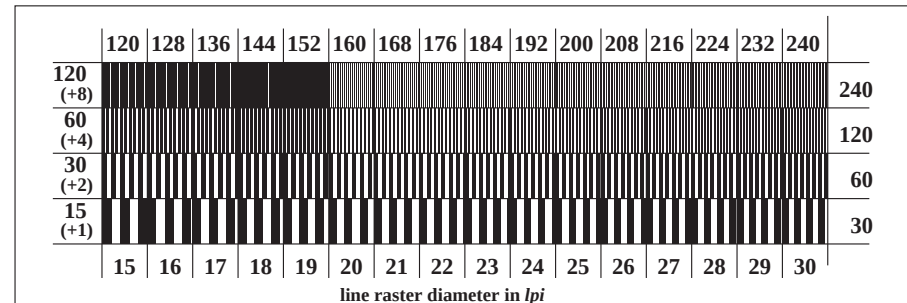

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor

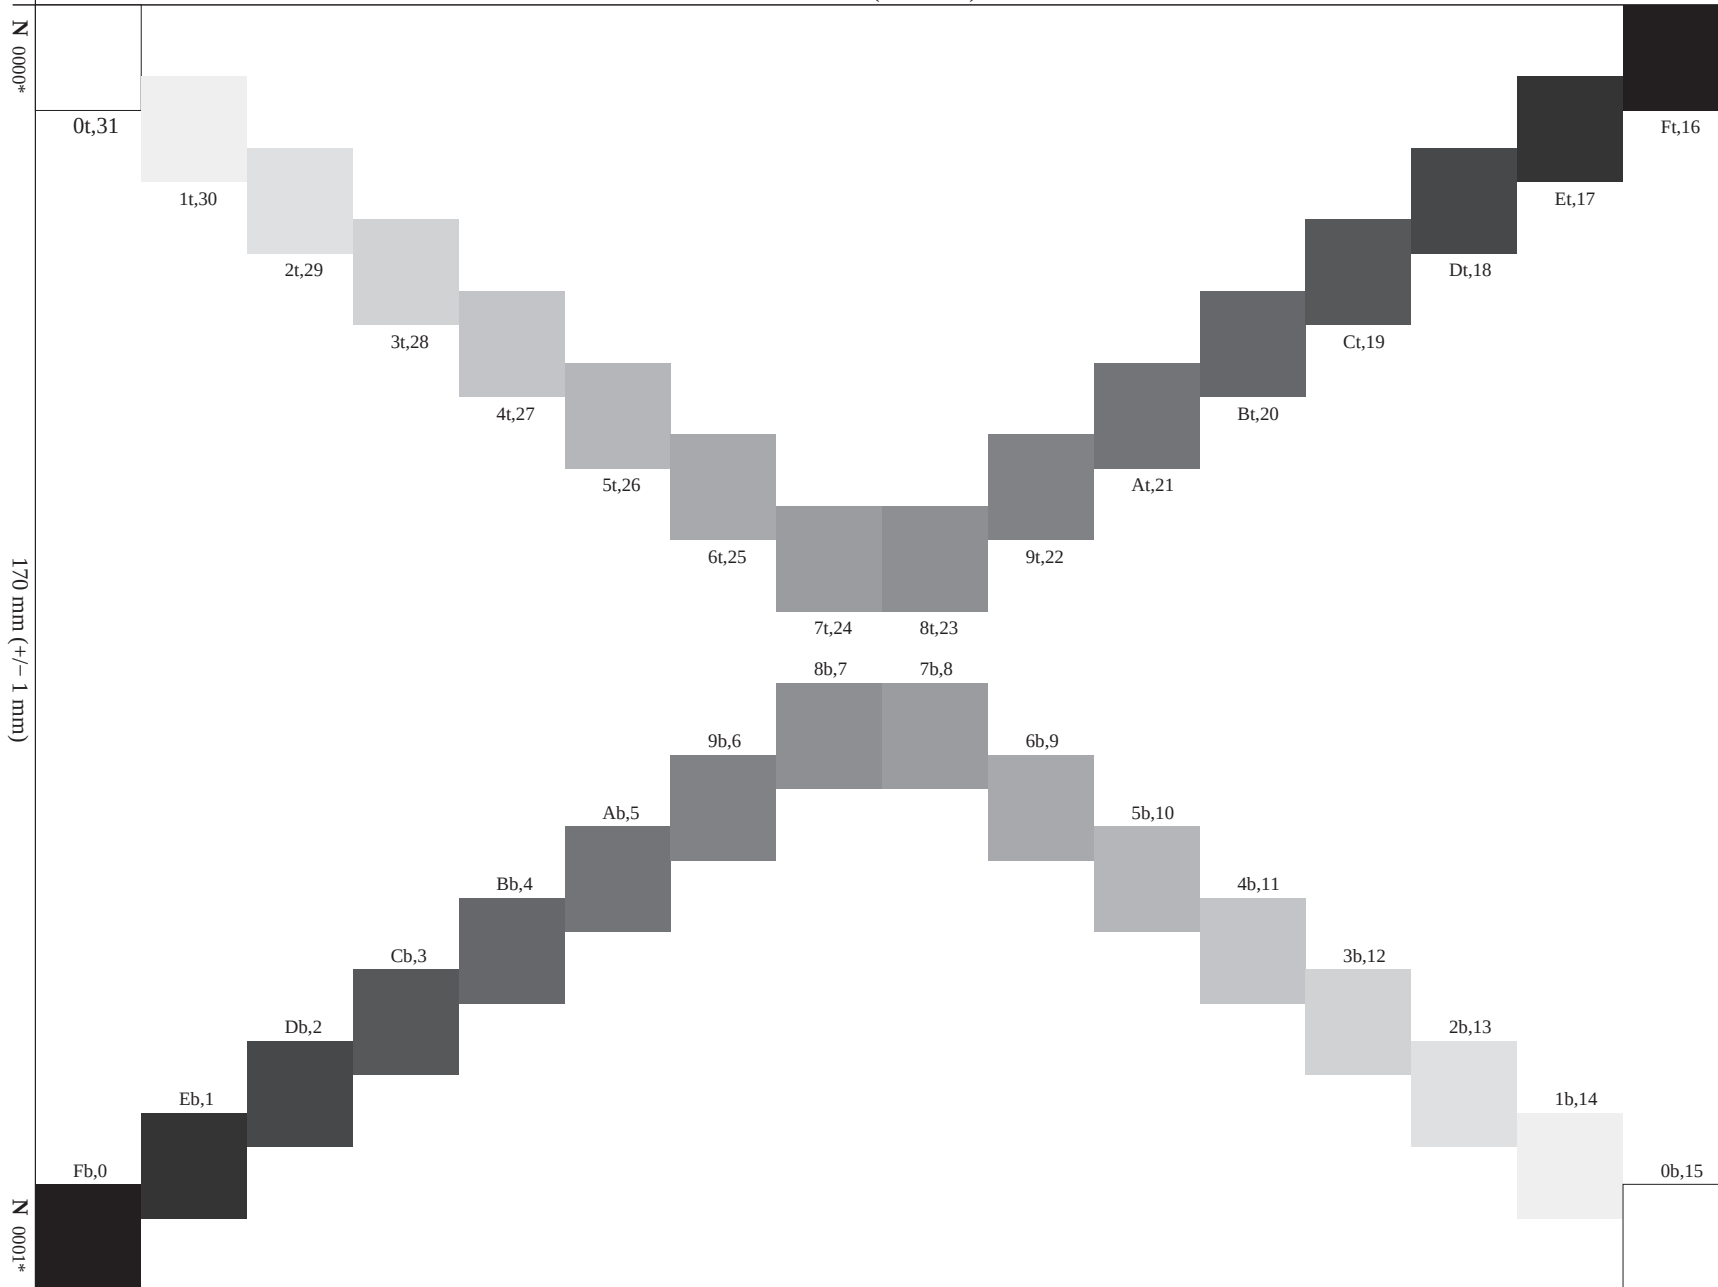

Form 4: Grey areas 14 mm x 14 mm for yield or emission: 10% geometrical and 5% visual area coverage; PS operator used: 000n* setcmykcolor

Form: 4, Serie: 1, Page: 5

ISO/IEC 19752-test chart, form 4
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: cmy0*/000n* setcmykcolor

170 mm (+/- 1 mm)

ISO/IEC 19752-test chart, form 5
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: cmy0*/000n* setcmykcolor

Form 5: Black areas 14 mm x 7 mm for yield or emission: 5% geometrical and 5% visual area coverage; PS operator used: 000n* setcmykcolor

Form: 5, Serie: 1, Page: 6

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752>

Version 2.0, io=0,0; iORS; oORS, CIELAB

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752>

Version 2.0, io=0,0; iORS; oORS, CIELAB

BAM registration: 20030501-BE95/10L/O95E05FP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

Grey Page

Form 6: Grey area 150 mm x 230 mm and rectangles 10 mm x 10 mm for yield or emission; PS operator used: 000n* setcmykcolor

Form: 6, Serie: 1, Page: 7

ISO/IEC 19752-test chart, form 6
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: cmy0*/000n* setcmykcolor

White Page

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752>

Version 2.0, io=0,0; iORS; oORS, CIELAB

BAM registration: 20030501-BE95/10L/O95E07FP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

Black Page

Form 8: Black area 150 mm x 230 mm and rectangles 10 mm x 10 mm for yield or emission; PS operator used: 000n* setcmykcolor

ISO/IEC 19752-test chart, form 8
Proposal by DIN NI28


2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: cmy0*/000n* setcmykcolor

Form: 8, Serie: 1, Page: 9

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752>

Version 2.0, io=0,0; iORS; oORS, CIELAB

BAM registration: 20030501-BE95/10L/O95E08FP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

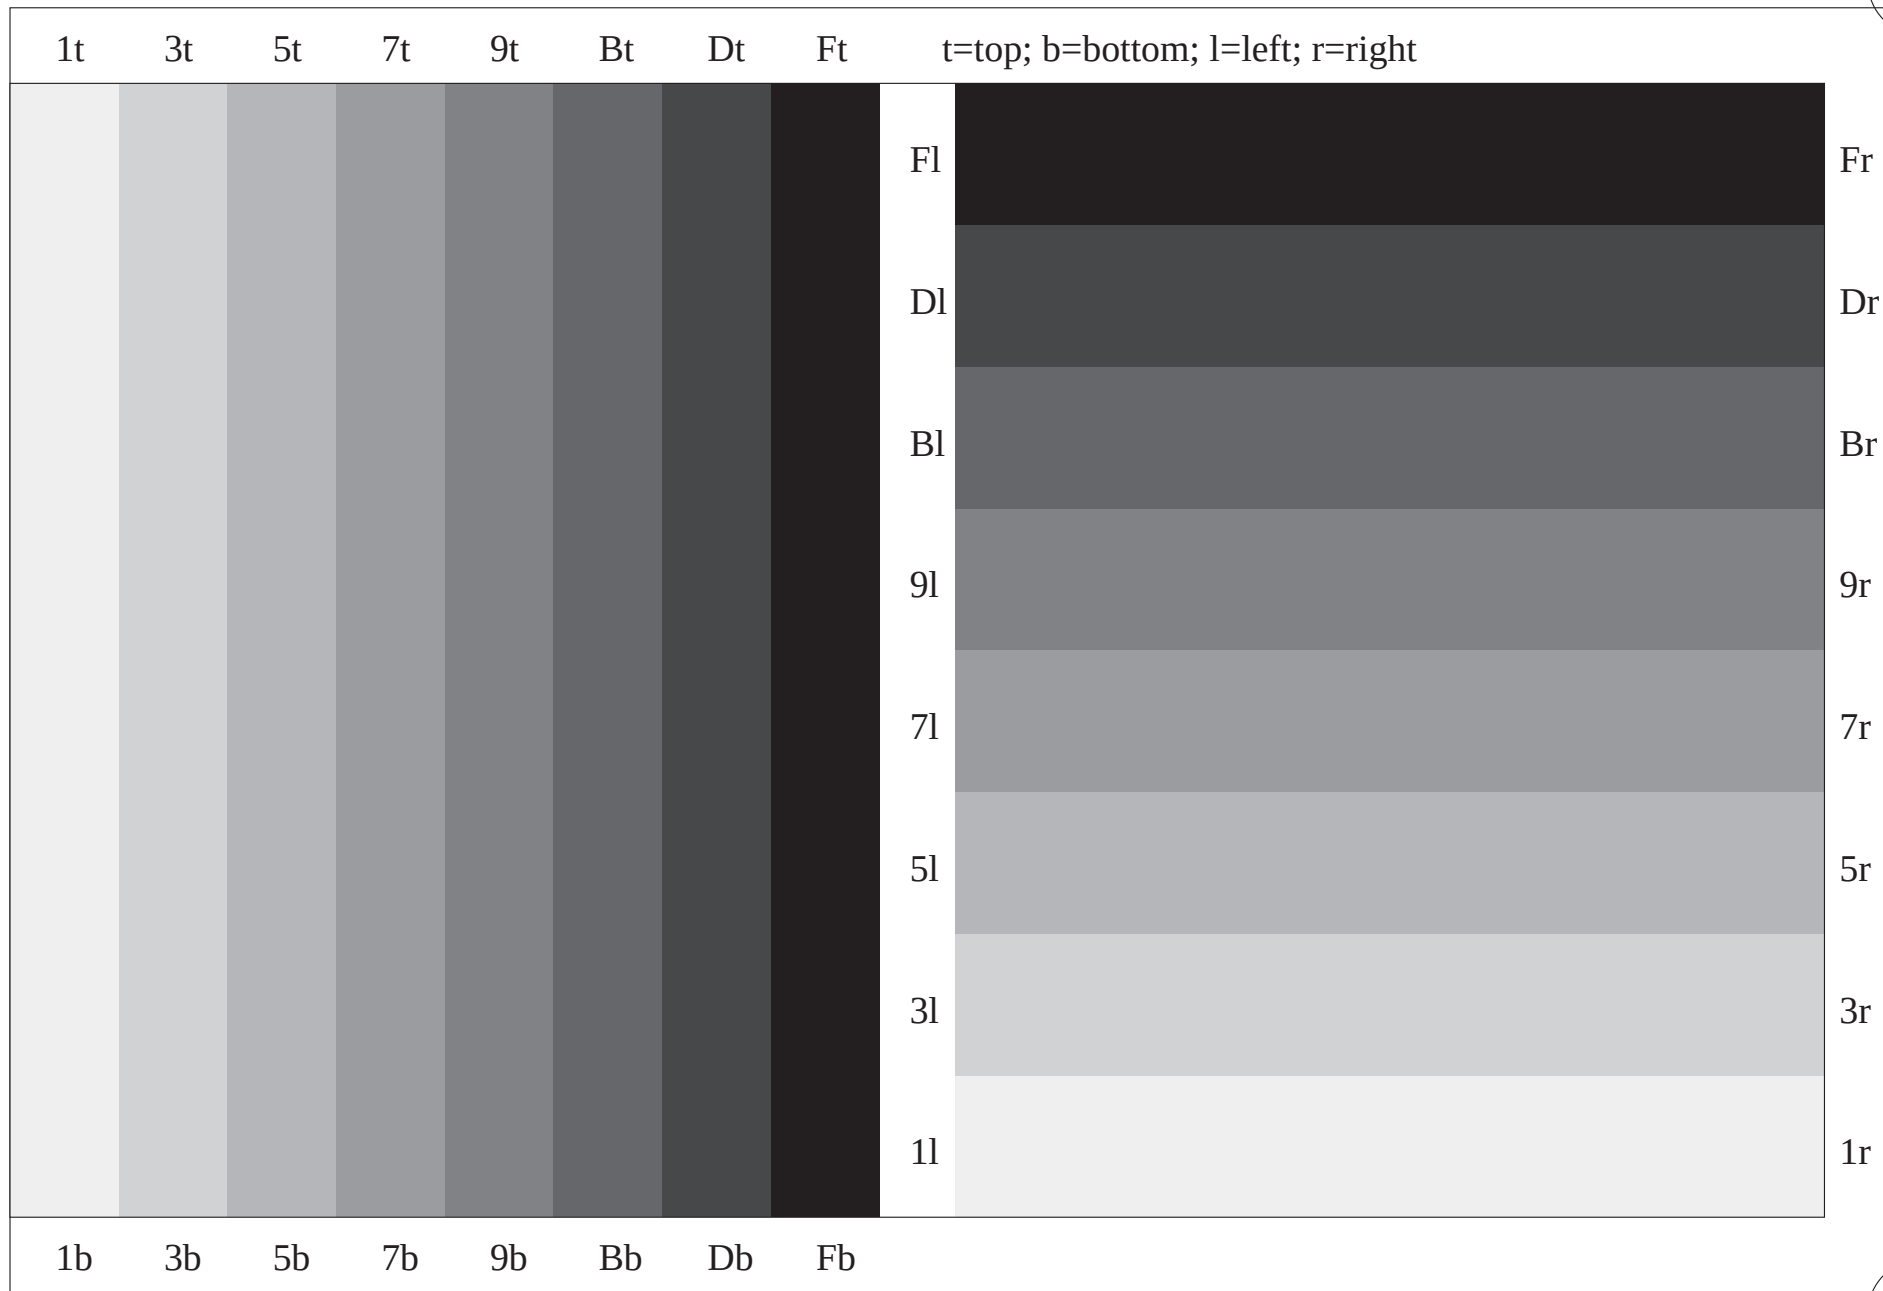

Form 9: Grey rectangles 115 mm x 14.4 mm for yield or emission; PS operator used: 000n* setcmykcolor

ISO/IEC 19752-test chart, form 9
Proposal by DIN NI28

2003-05-01, name1

input: 000n* setcmykcolor

Test device type: name2 output: cmy0*/000n* setcmykcolor

Form: 9,

Serie: 1,

Page: 10

Form: 1, Serie: 2, Page: 1

```
used: 000n* setcmkcolor
2003-05-01, name1 input: 000n* setcmkcolor
Test device type: name2 output: cmy0*/000n* setcm
```


ISO/IEC 19752-test chart, form 1
Proposal by DIN NI28

Form 1: "LSB" level

Mr.Maderia:



Nam liber tempor cum soluta nobis eleifend option cogue nihil consequat, velillum. Dolore eu zril feugiat nulla facilisis at vero eros accumsan et iustó odio dignissim qui blandit praesent lutatum ril lobortis nisl ut aliquip exea commodo consequat. Duis autem vel eum iríure dolor in hendreritin vulputate velit esse molestie tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim vêniam, quis nostrud exerci tation ullamcorper suscipit lotis nisl ut aliquip ex ea commodo con-sequat. Lorem ipsum dolor sit.

Amet,consectetur adipiscing elit, sēd diam nonummy nibh veniam,
recneps adipiscing elit, sed diam nonummy nibtil laoreet dolore magna
aliam erat volutpat. Ut wisi enim minim veniam, quisient nostrud. Soluta
nobis eleifend optn cogue nihil imerdiet domg id quod mzim plerat facer
posim aum. Lorem ipsum dolor sit amet, consectetur. Duis autem vel eum
iriure dolor in hendreritin vulputate velit esse ea commodo molestie.



LSB

Funtres Solber Netener

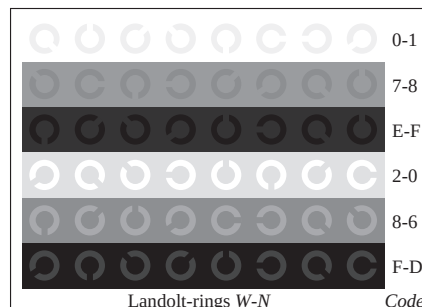



L^* / Y (absolute)	18,0/2,5	23,1/3,8	28,2/5,5	33,3/7,7	38,5/10,3	43,6/13,6	48,8/17,4	54,0/21,9	59,1/27,2	64,3/33,2	69,5/40,0	74,7/47,8	79,8/56,5	85,0/66,1	90,2/76,8	95,4/88,6
No. and Hex code	00,F	01,E	02,D	03,C	04,B	05,A	06,9	07,8	08,7	09,6	10,5	11,4	12,3	13,2	14,1	15,0
$L^*_{CIE LAB,r}$ (relative)	w* 0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000


Stephen J.Singel
Demperta Aminerimum
Labanda Sinpat Abarress

SJS:dwg


170 mm +/- 1%

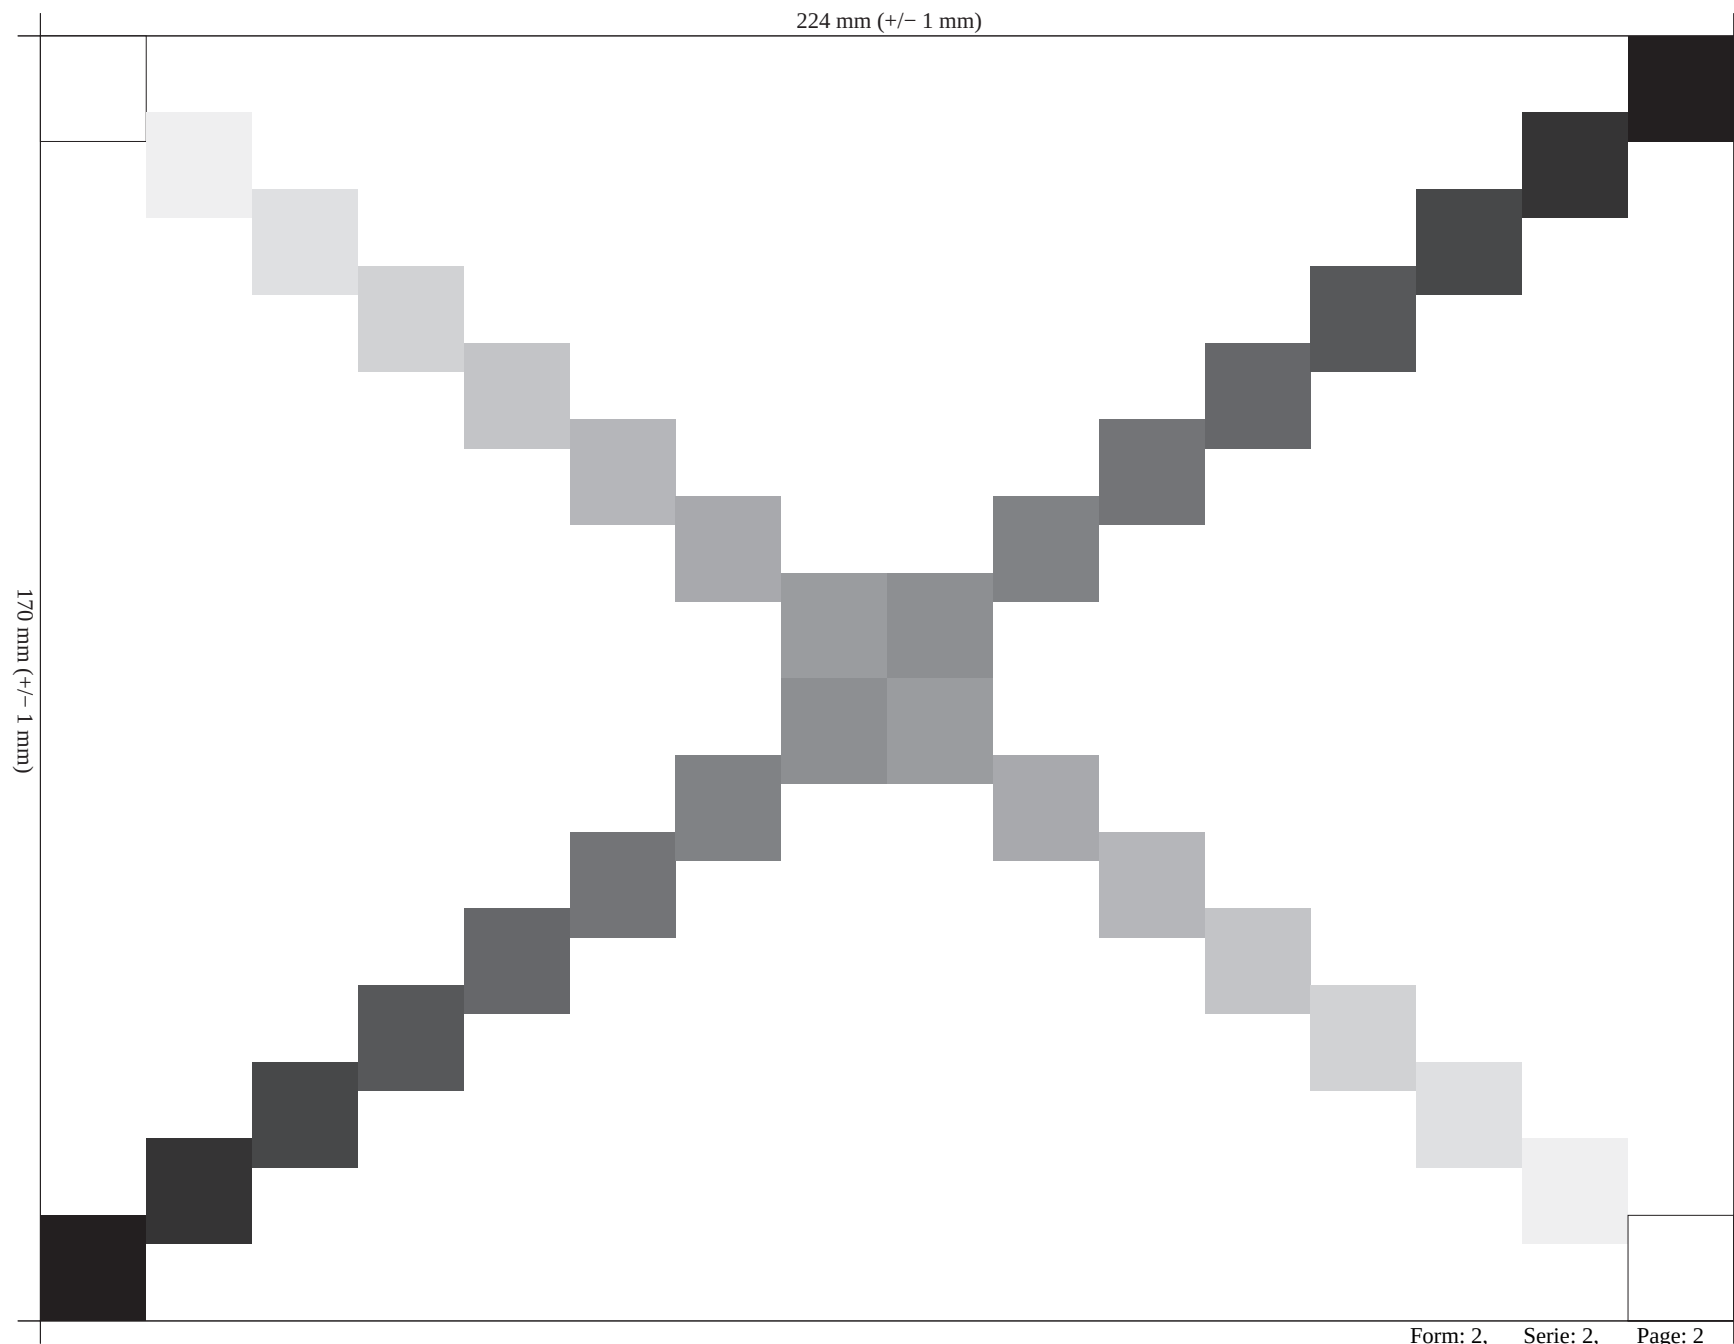

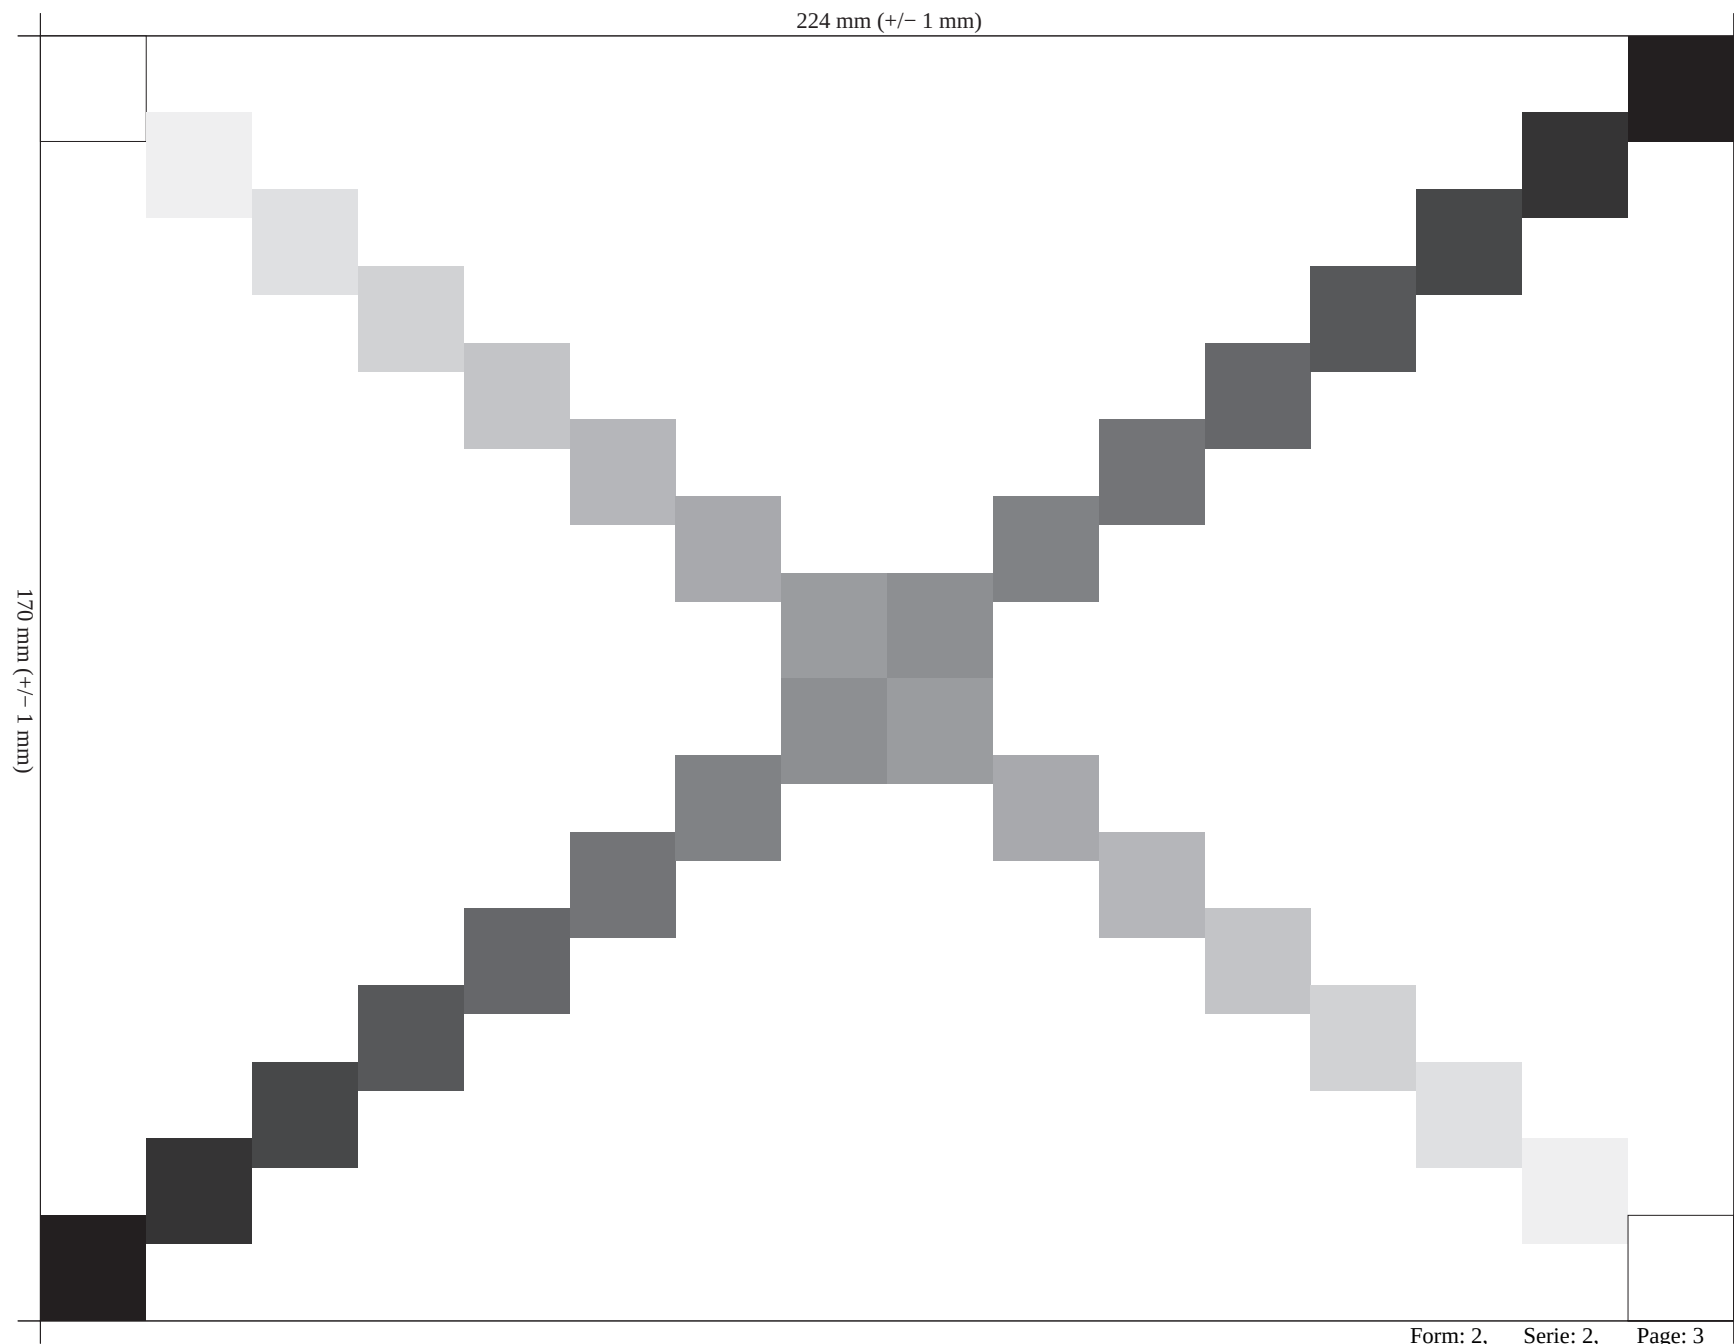


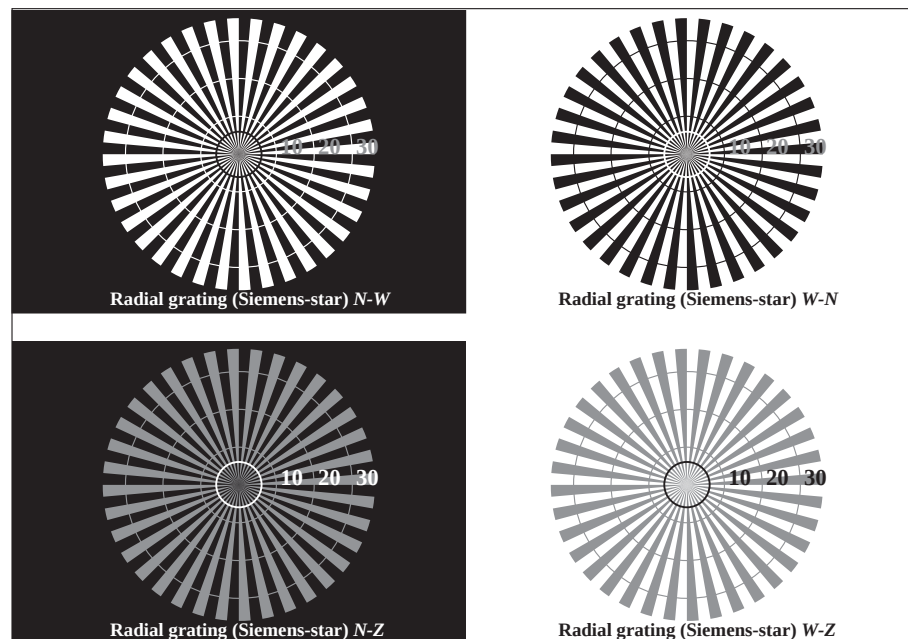

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

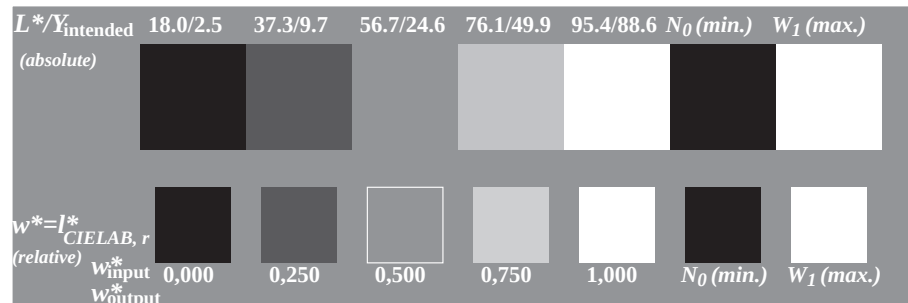

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: 000n* setcmykcolor

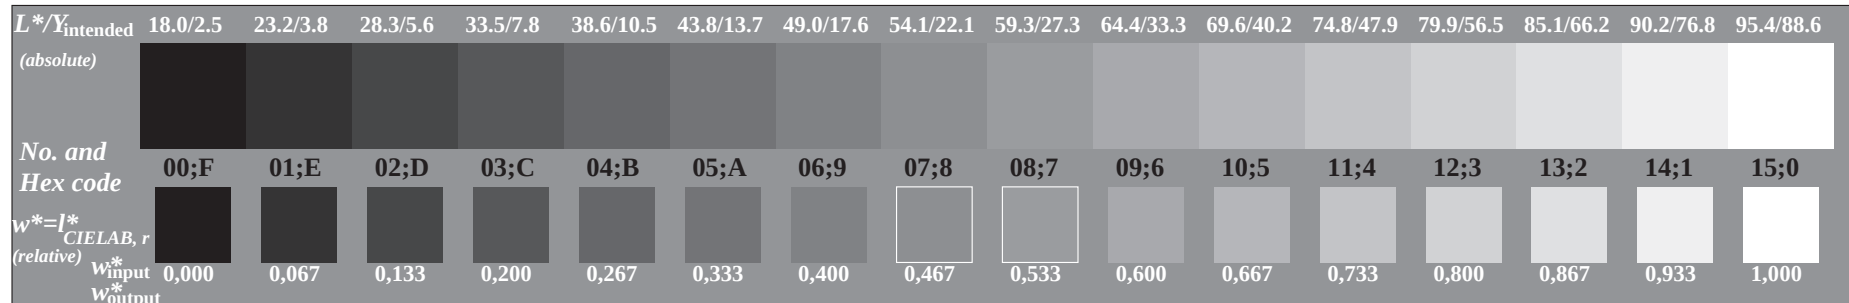


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n* setcmykcolor


ISO/IEC 19752-test chart, form 3
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: cmy0*/000n* setcmykcolor


Form: 3, Serie: 2, Page: 4

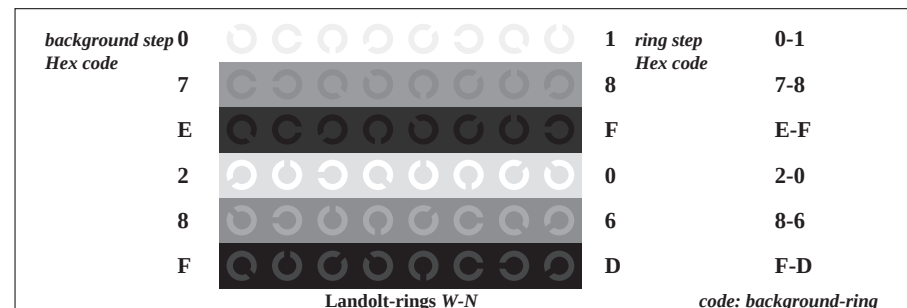


Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

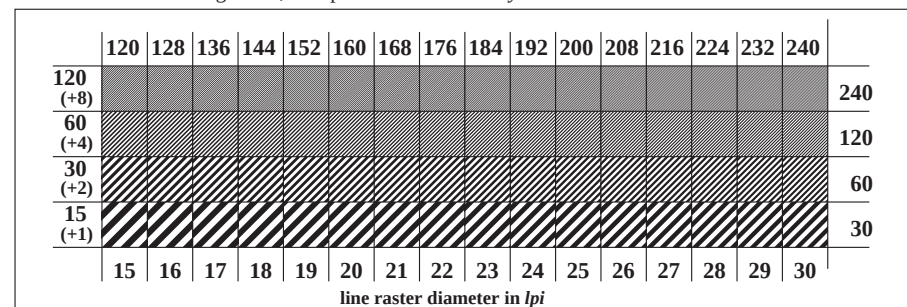

Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

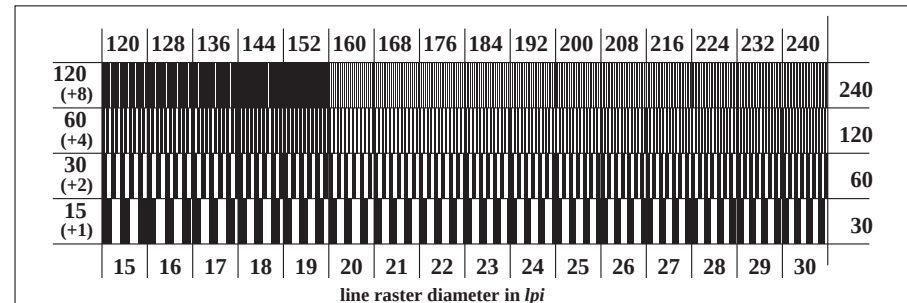

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor

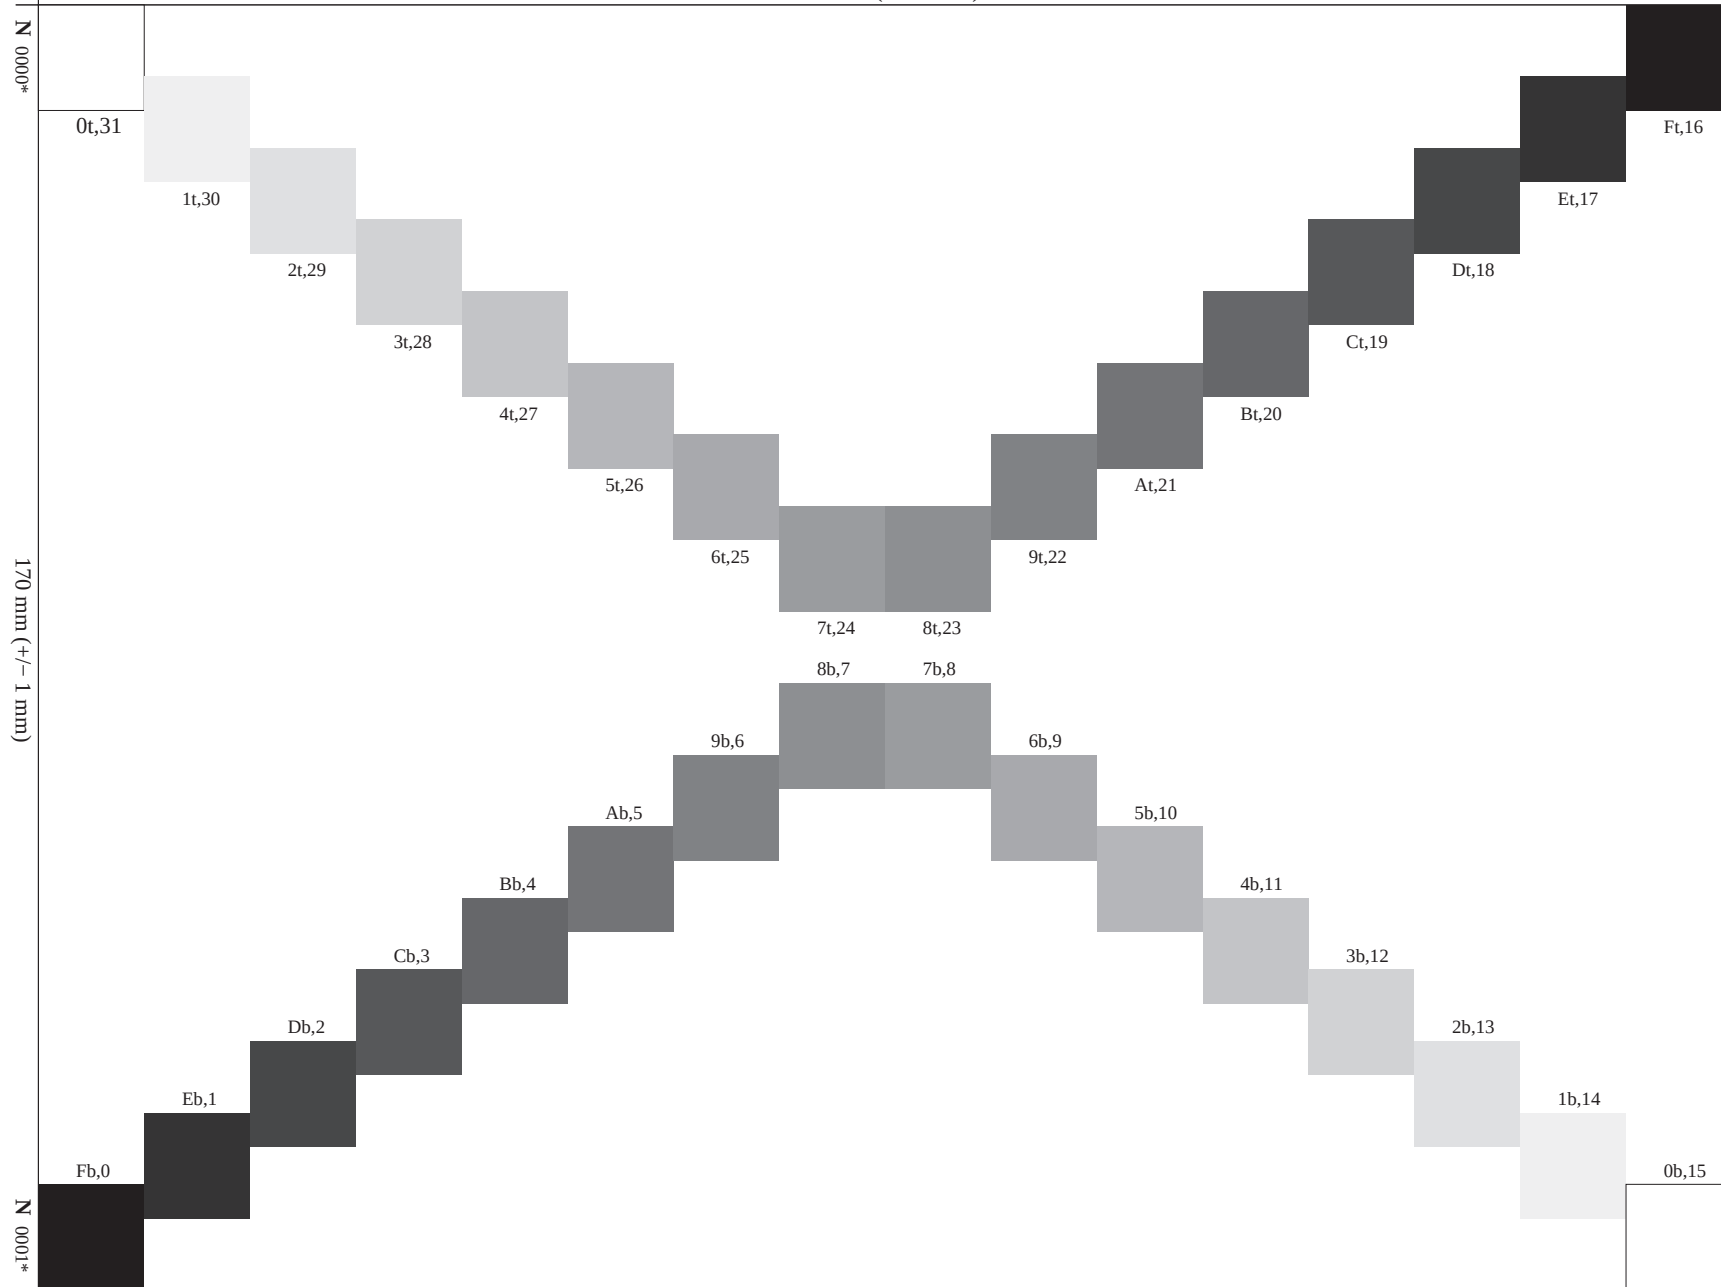

170 mm (+/- 1 mm)

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752>

Version 2.0, io=0,0; iORS; oORS, CIELAB

Form 5: Black areas 14 mm x 7 mm for yield or emission: 5% geometrical and 5% visual area coverage; PS operator used: 000n* setcmykcolor

ISO/IEC 19752-test chart, form 5
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: cmy0*/000n* setcmykcolor

Form: 5, Serie: 2, Page: 6

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752>

Version 2.0, io=0,0; iORS; oORS, CIELAB

BAM registration: 20030501-BE95/10L/O95E05FP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

Grey Page

Form 6: Grey area 150 mm x 230 mm and rectangles 10 mm x 10 mm for yield or emission; PS operator used: 000n* setcmykcolor

Form: 6,

Serie: 2,

Page: 7

ISO/IEC 19752-test chart, form 6
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: cmy0*/000n* setcmykcolor

White Page

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752>

Version 2.0, io=0,0; iORS; oORS, CIELAB

BAM registration: 20030501-BE95/10L/O95E07FP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

Black Page

Form 8: Black area 150 mm x 230 mm and rectangles 10 mm x 10 mm for yield or emission; PS operator used: 000n* setcmykcolor

ISO/IEC 19752-test chart, form 8
Proposal by DIN NI28


2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: cmy0*/000n* setcmykcolor

Form: 8, Serie: 2, Page: 9

See for similar files: <http://www.ps.bam.de/BE95/>
Technical information: <http://www.ps.bam.de/19752>

Version 2.0, io=0,0; iORS; oORS, CIELAB

BAM registration: 20030501-BE95/10L/O95E08FP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

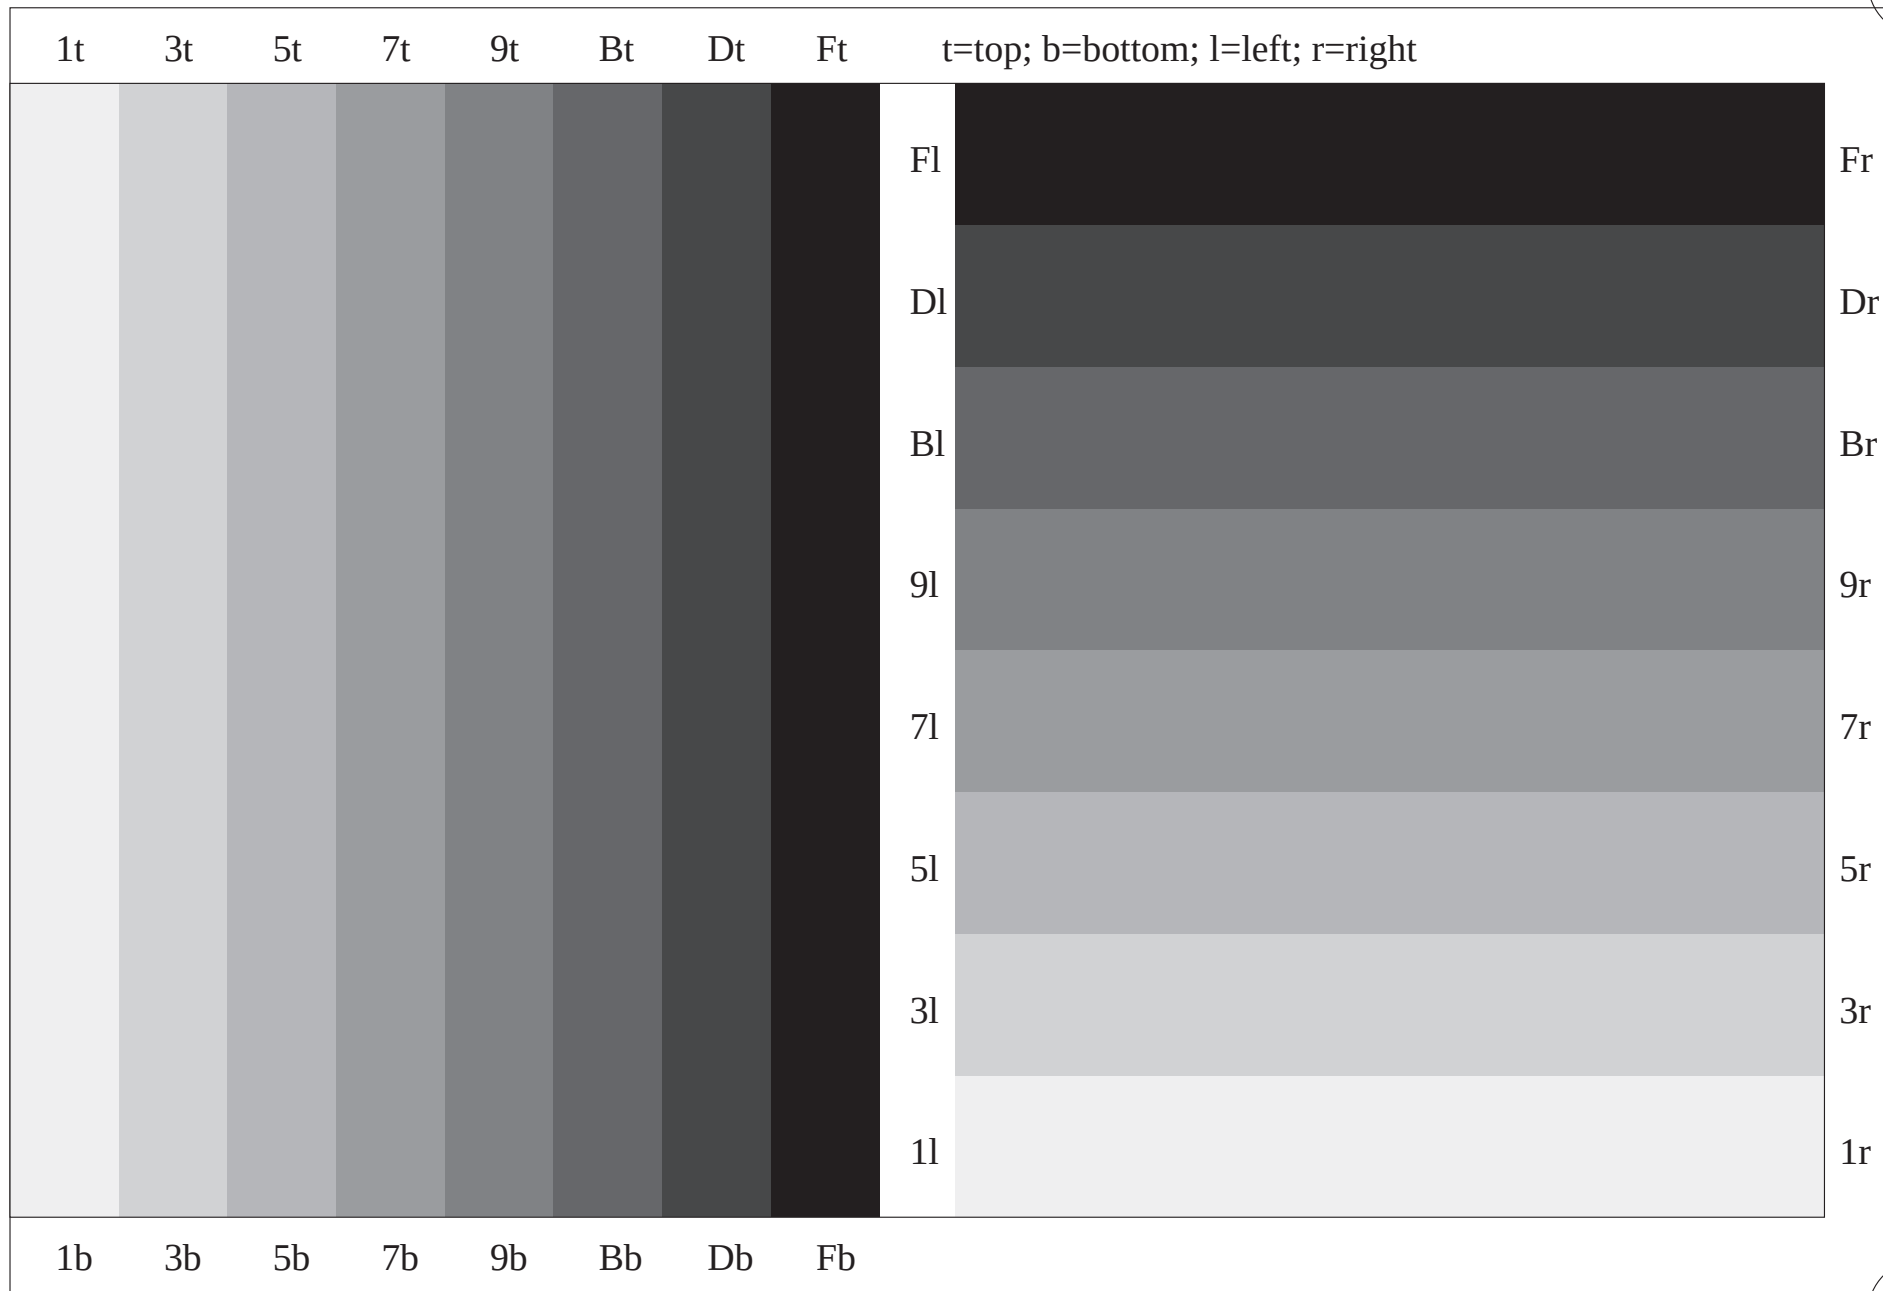

Form 9: Grey rectangles 115 mm x 14.4 mm for yield or emission; PS operator used: 000n* setcmykcolor

ISO/IEC 19752-test chart, form 9
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: cmy0*/000n* setcmykcolor

Form: 9, Serie: 2, Page: 10