



Picture C1: Radial grating (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n\* setcmykcolor

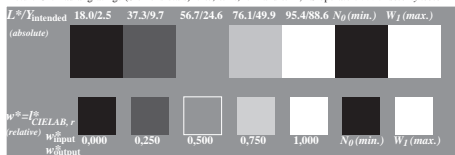

Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: 000n\* setcmykcolor

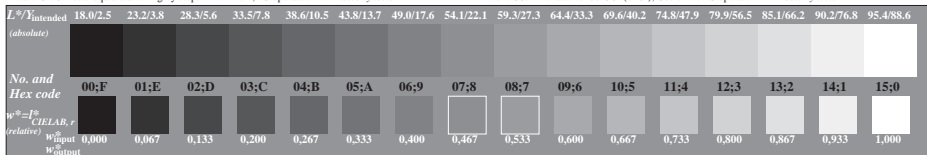


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: 000n\* setcmykcolor


ISO/IEC 19752-test chart, form 3  
Proposal by DIN N128

2003-05-01, name1 input: 000n\* setcmykcolor  
Test device type: name2 output: cmy0\*/000n\* setcmykcolor


Form: 3, Series: 1, Page: 1

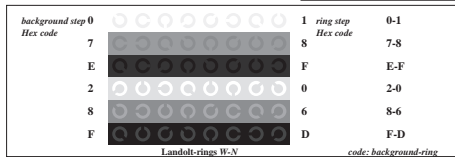

Picture C4: Landolt-rings W-N; PS operator: 000n\* setcmykcolor

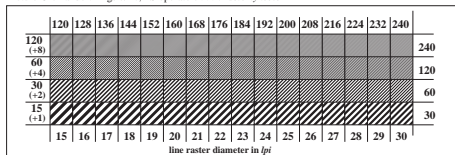

Picture C5: Line raster under 45° (or 135°); PS operator: 000n\* setcmykcolor

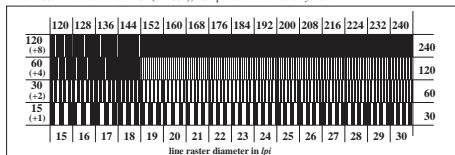

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n\* setcmykcolor