



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmkycolor

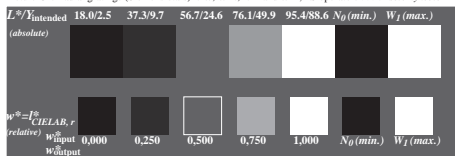

Picture C2: 5 visual equidistant L^* -grey steps + $N_0 + W_I$; PS operator: 000n* setcmkycolor

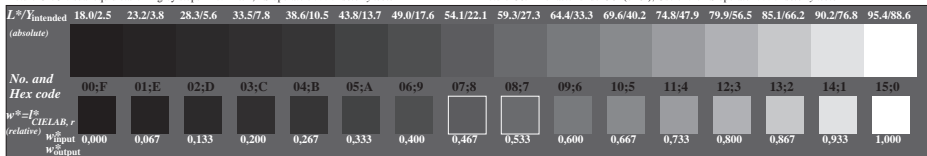


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n* setcmkycolor


ISO/IEC 19752-test chart, form 3
Proposal by DIN N128

2003-05-01, name1 input: 000n* setcmkycolor
Test device type: name2 output: cmy0*/000n* setcmkycolor


Form: 3, Series: 1, Page: 1

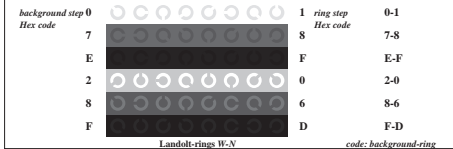

Picture C4: Landolt-rings W-N; PS operator: 000n* setcmkycolor

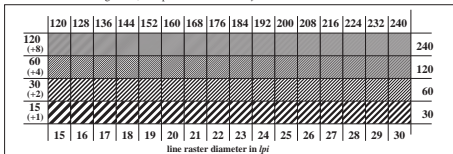

Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmkycolor

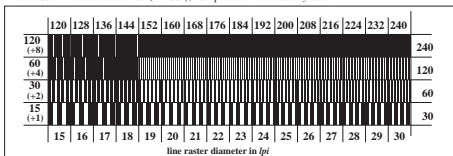

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmkycolor