



Picture C1: Radial grating (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n\* setcmkycolor

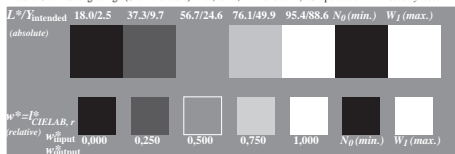


Picture C2: 5 visual equidistant L\*-grey steps + N0 + W1; PS operator: 000n\* setcmkycolor

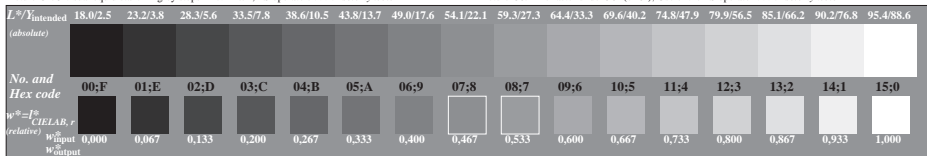


Picture C3: 16 visual equidistant L\*-grey steps; PS operator: 000n\* setcmkycolor

ISO/IEC 19752-test chart, form 3  
Proposal by DIN N128


2003-05-01, name1 input: 000n\* setcmkycolor  
Test device type: name2 output: cmy0\*/000n\* setcmkycolor

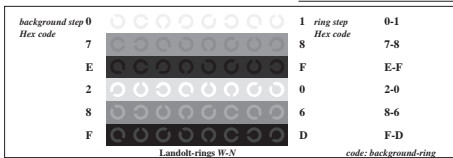

Picture C4: Landolt-rings W-N; PS operator: 000n\* setcmkycolor

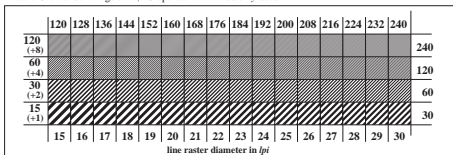

Picture C5: Line raster under 45° (or 135°); PS operator: 000n\* setcmkycolor

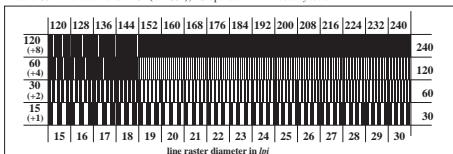

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n\* setcmkycolor