

ISO 9241-test chart for four different contrast ranges

Ergonomics – Visual Displays – Field Assessment Methods


input: *nnn0* setcmykcolor*

output: no change compared to input


BAM registration: 20040101-CE62/10S/S62E00F1.PS/.TXT
Application for achromatic display output with CIE LAB contrast range
BAM material: code=ha4ta
 $L^*:L^*:n = 95.4 : 1.10$
 $L^*:L^*:n = 95.4 : 1.80$

See for similar files: <http://www.ps.bam.de/CE62/>
Technical information: <http://www.ps.bam.de/9241>


Version 2.0, io=2.2, CIE XYZ, 0.5 exp

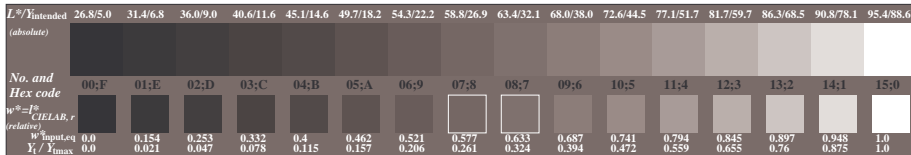


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *nnn0* setcmykcolor*

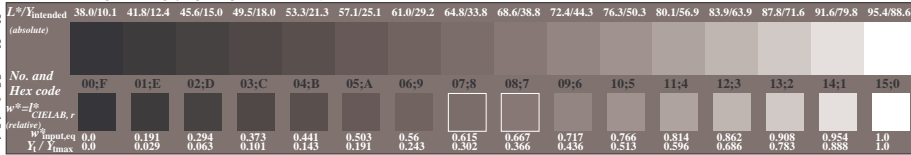

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *nnn0* setcmykcolor*

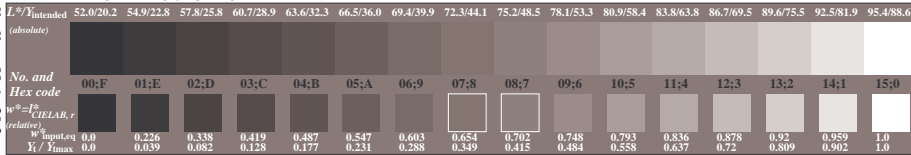

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *nnn0* setcmykcolor*

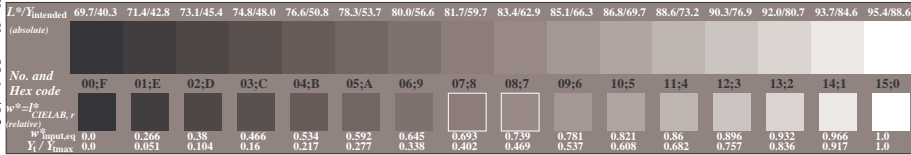

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *nnn0* setcmykcolor*