




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

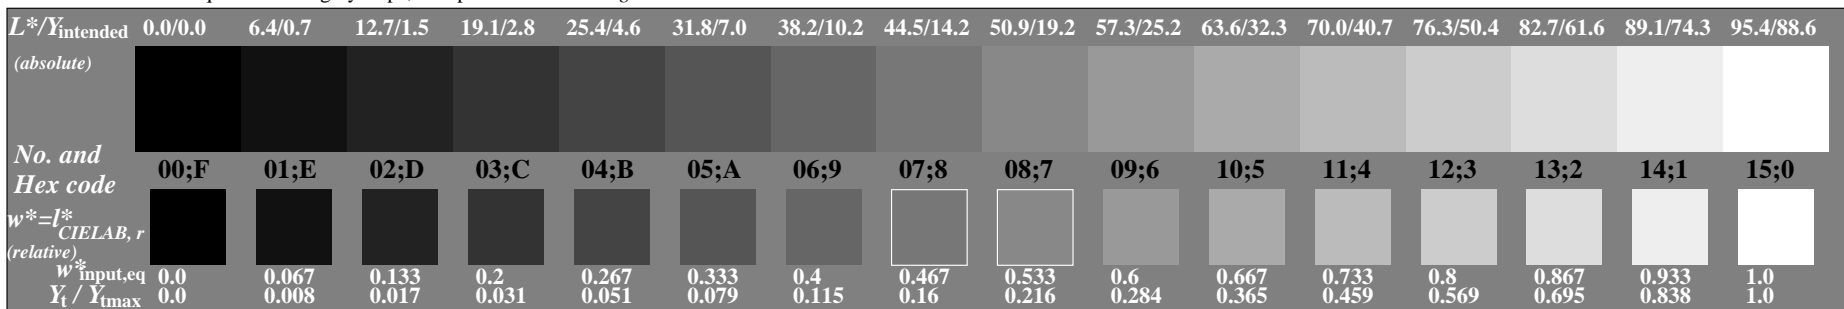


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

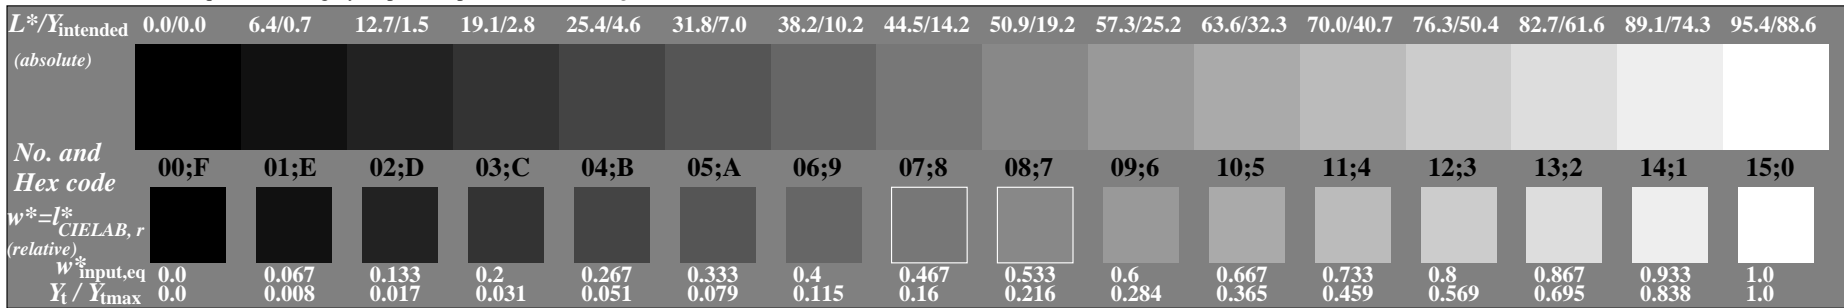


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

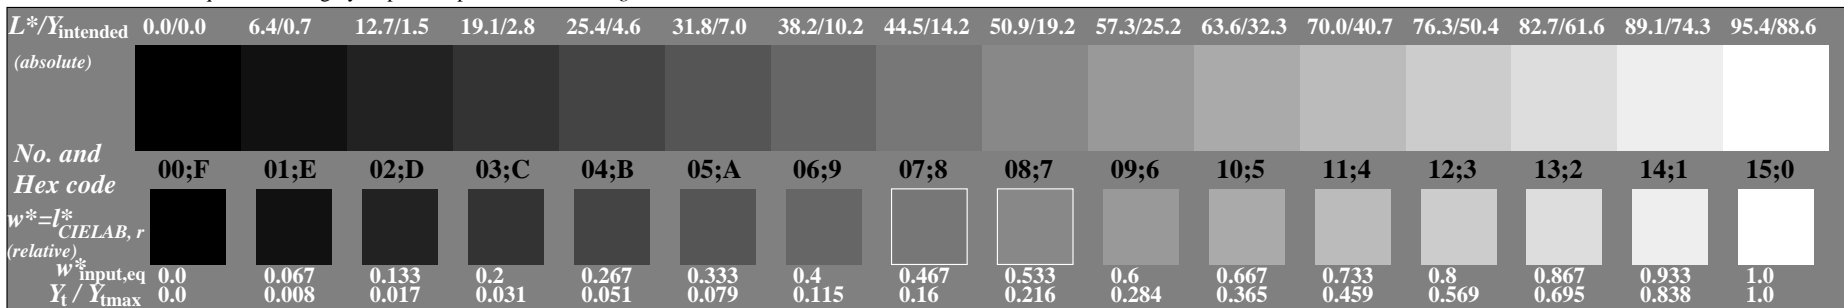


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

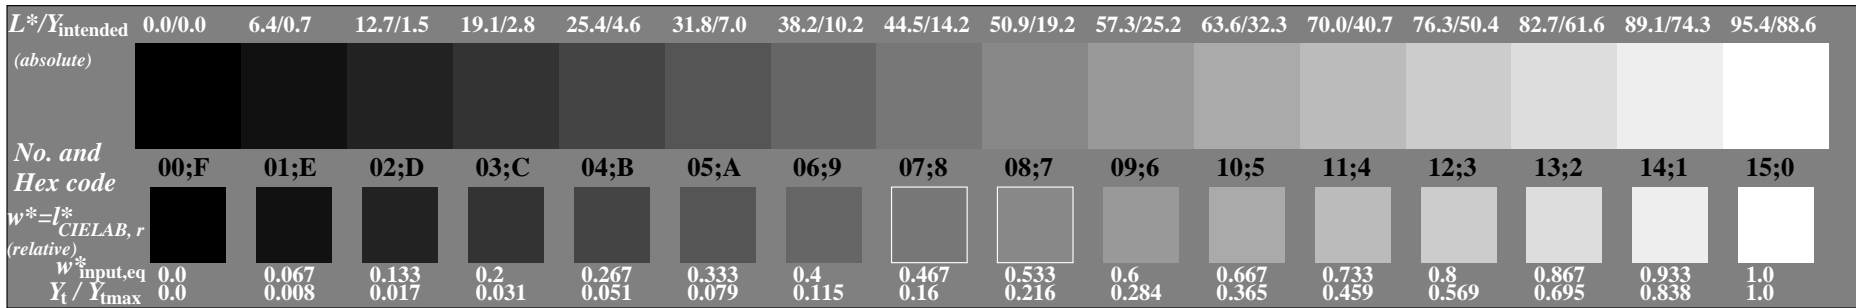


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

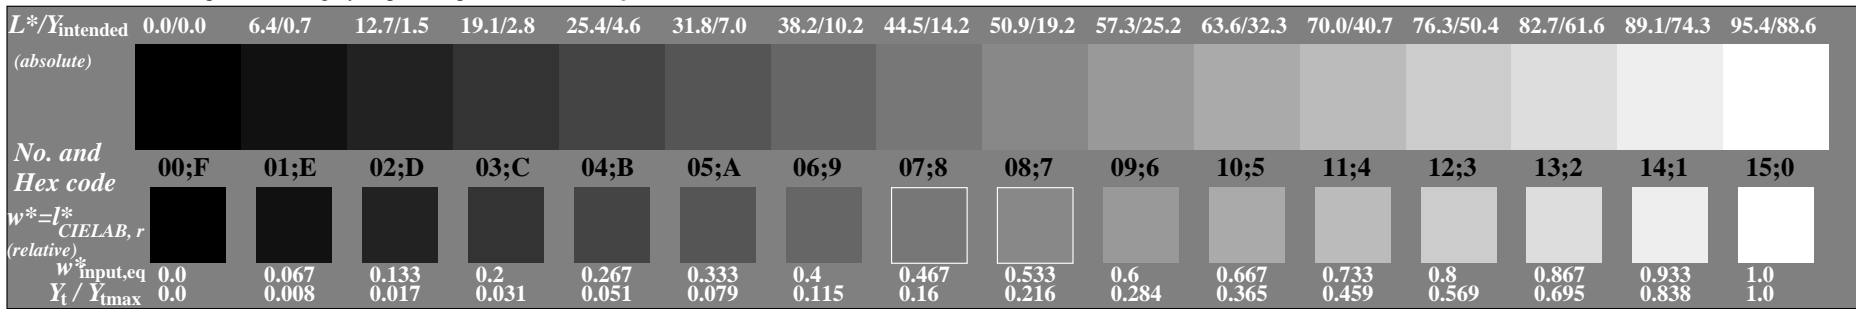

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

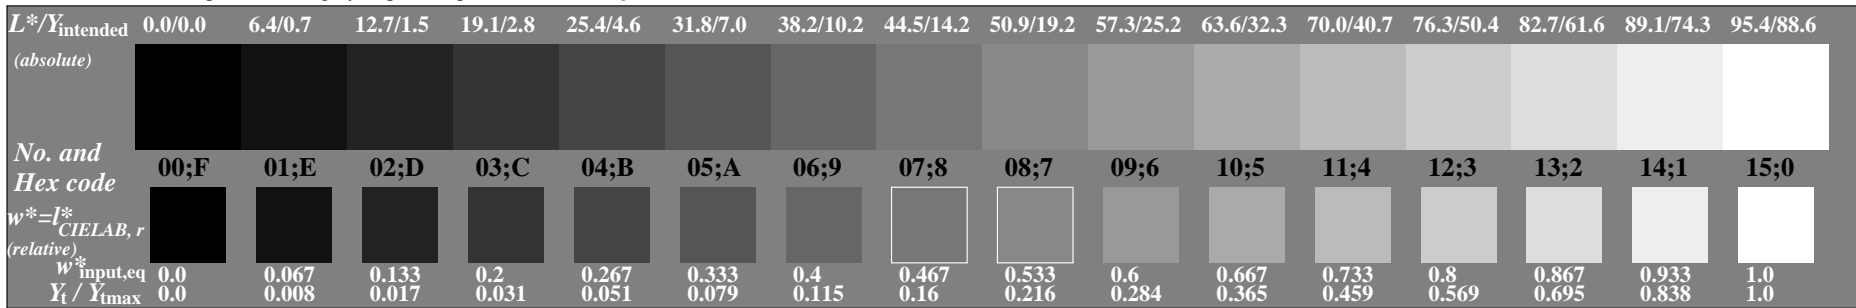

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

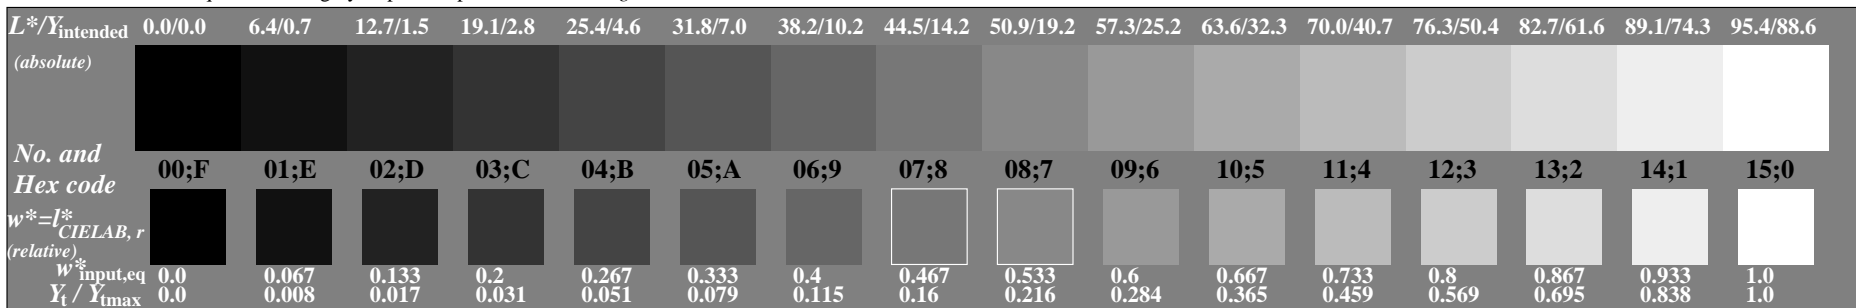

Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

ISO 9241-test chart for four different contrast ranges

Ergonomics – Visual Displays – Field Assessment Methods

input: *www* setrgbcolor*

output: *no change compared to input*

See for similar files: [http://www.ps.bam.de/CE63/](http://www.ps.bam.de/CE63/Technical information: http://www.ps.bam.de/9241)
Technical information: <http://www.ps.bam.de/9241>

Version 2.0, io=3.3, CIELAB, 1.0 exp

BAM registration: 20040101-CE63/10L/L63E40SP.PS/.PDF
Application for achromatic display output with CIELAB contrast range

BAM material: code=rh4ta