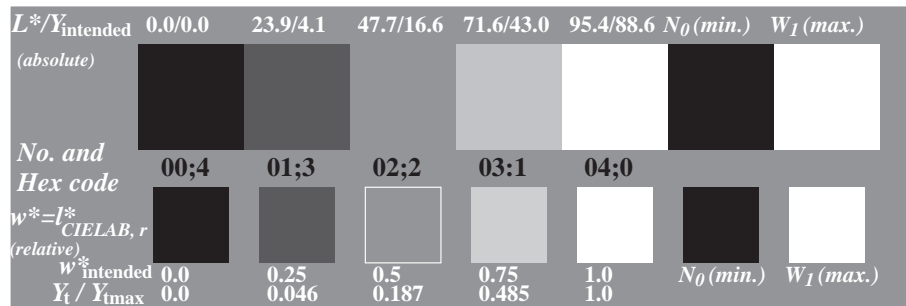
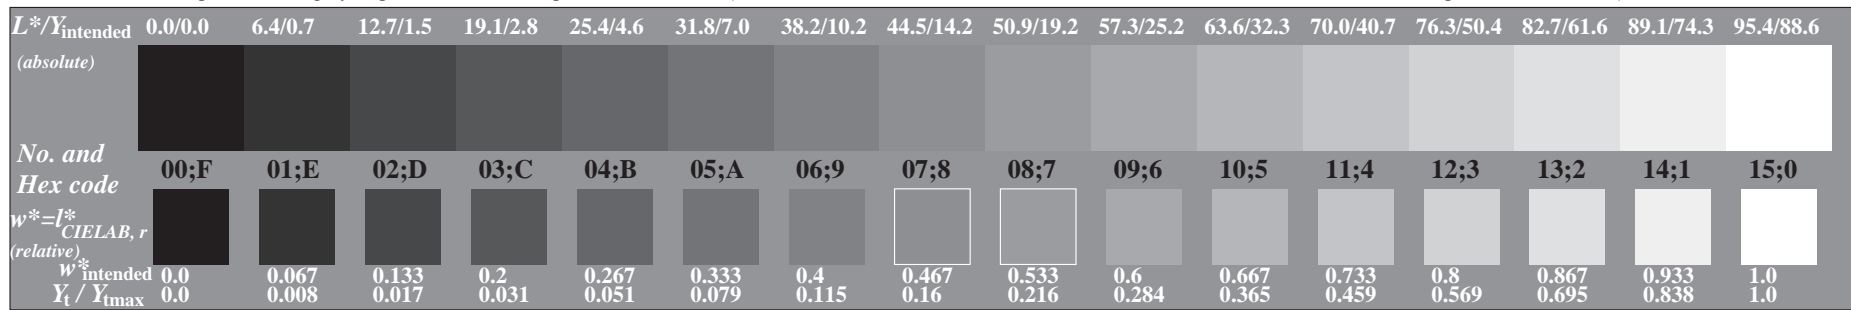
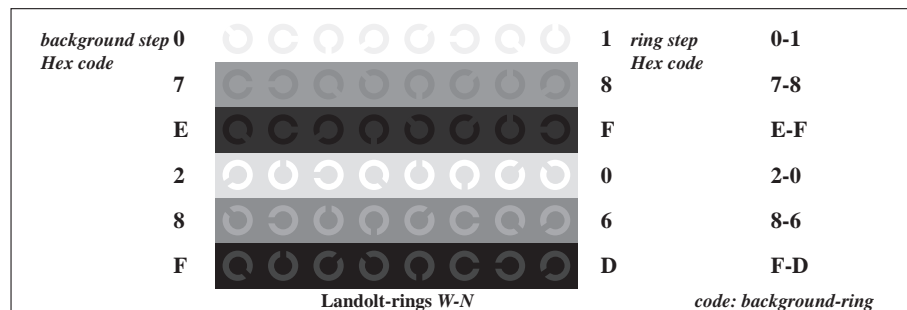
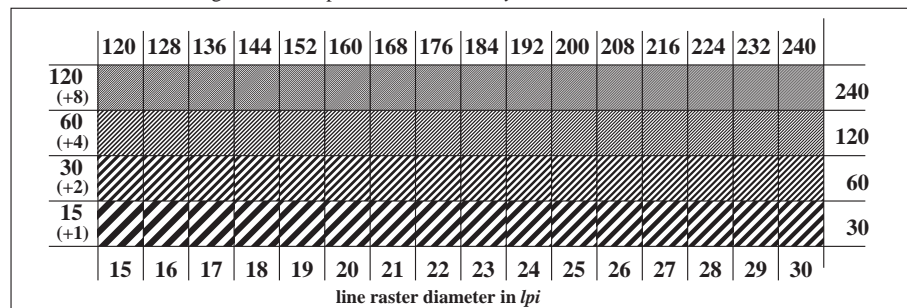
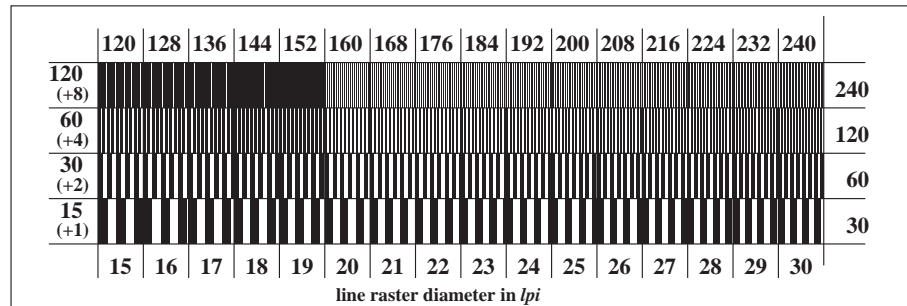
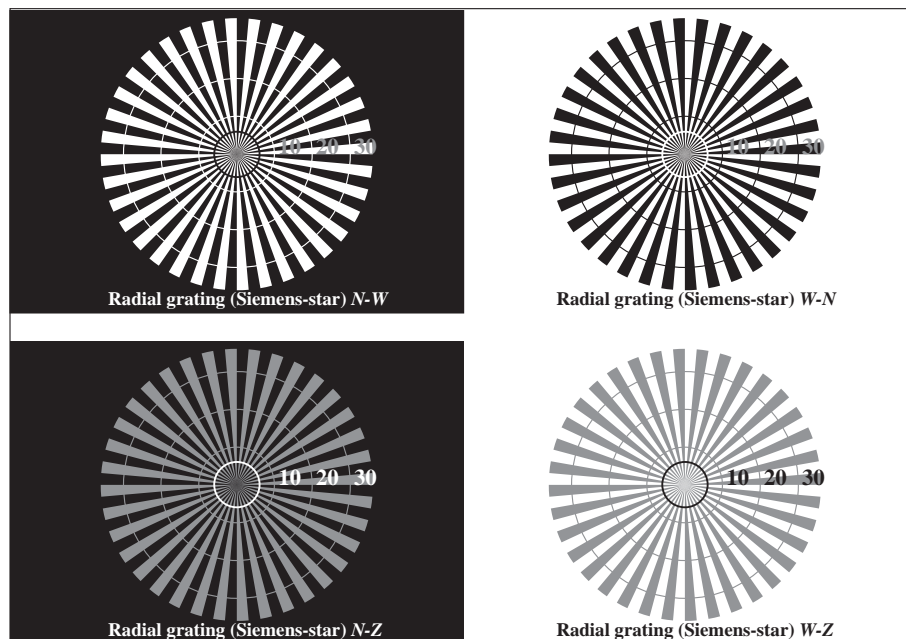
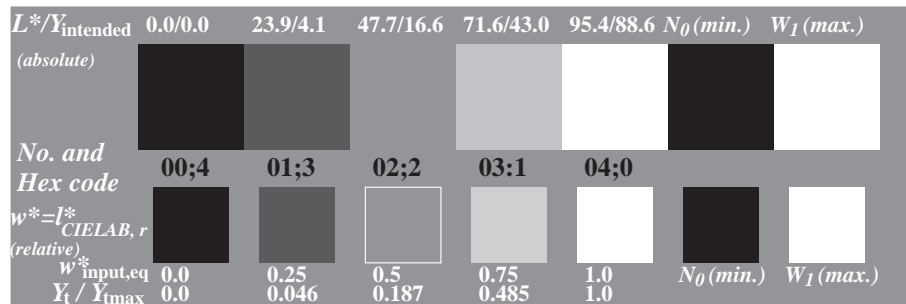
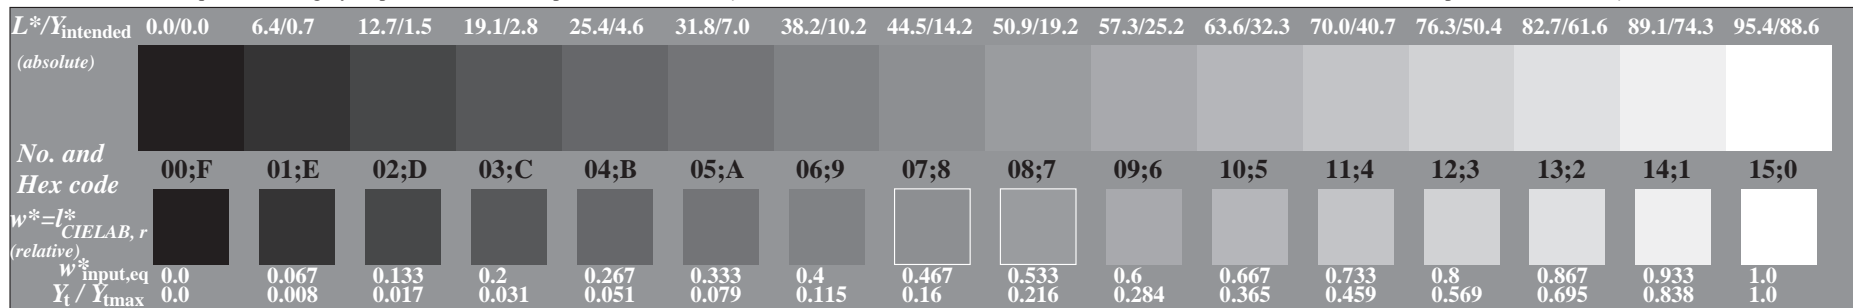
Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $000n^* \text{ setcmykcolor}$ Picture C2: 5 visual equidistant L^* -gray steps + N_0 + W_1 ; PS operator: $000n^* \text{ setcmykcolor}$ Picture C3: 16 visual equidistant L^* -gray steps; PS operator: $000n^* \text{ setcmykcolor}$ ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$

Ergonomics – Visual Displays – Field Assessment Methods

input: $000n^* \text{ setcmykcolor}$

output: no change compared to input




Picture C4: Landolt-rings W-N; PS operator: $000n^* \text{ setcmykcolor}$ Picture C5: Line raster under 45° (or 135°); PS operator: $000n^* \text{ setcmykcolor}$ Picture C6: Line raster under 90° (or 0°); Use of the PS operator $000n^* \text{ setcmykcolor}$


Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $000n^* \text{ setcmykcolor}$ Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: $000n^* \text{ setcmykcolor}$ Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $000n^* \text{ setcmykcolor}$ ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$

Ergonomics – Visual Displays – Field Assessment Methods


input: $000n^* \text{ setcmykcolor}$

output: no change compared to input

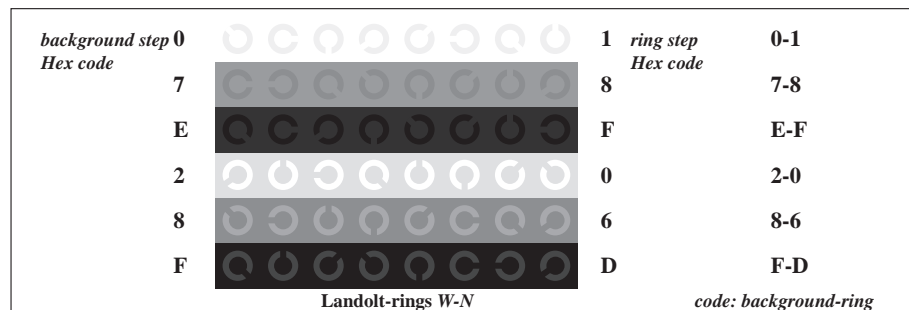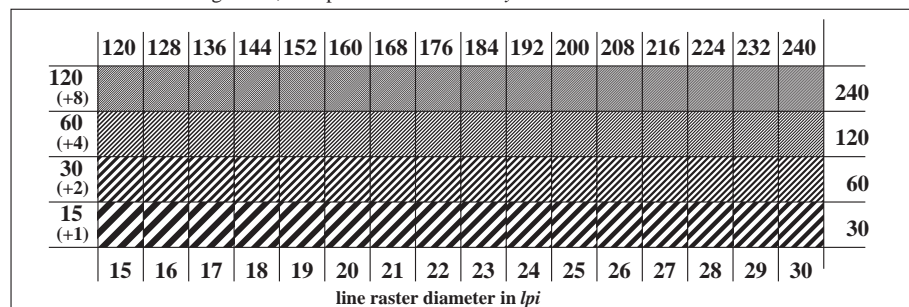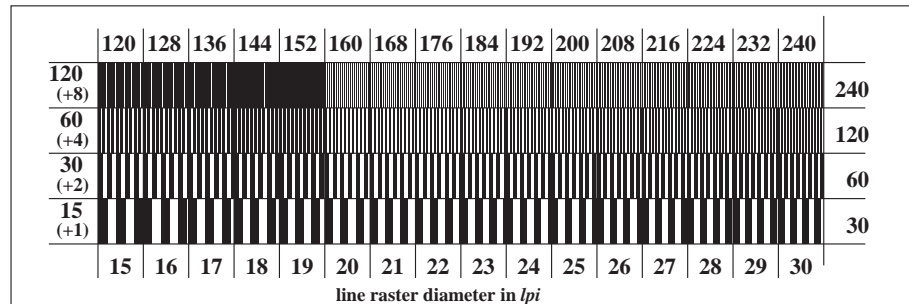
Picture C4: Landolt-rings W-N; PS operator: $000n^* \text{ setcmykcolor}$ Picture C5: Line raster under 45° (or 135°); PS operator: $000n^* \text{ setcmykcolor}$ Picture C6: Line raster under 90° (or 0°); Use of the PS operator $000n^* \text{ setcmykcolor}$

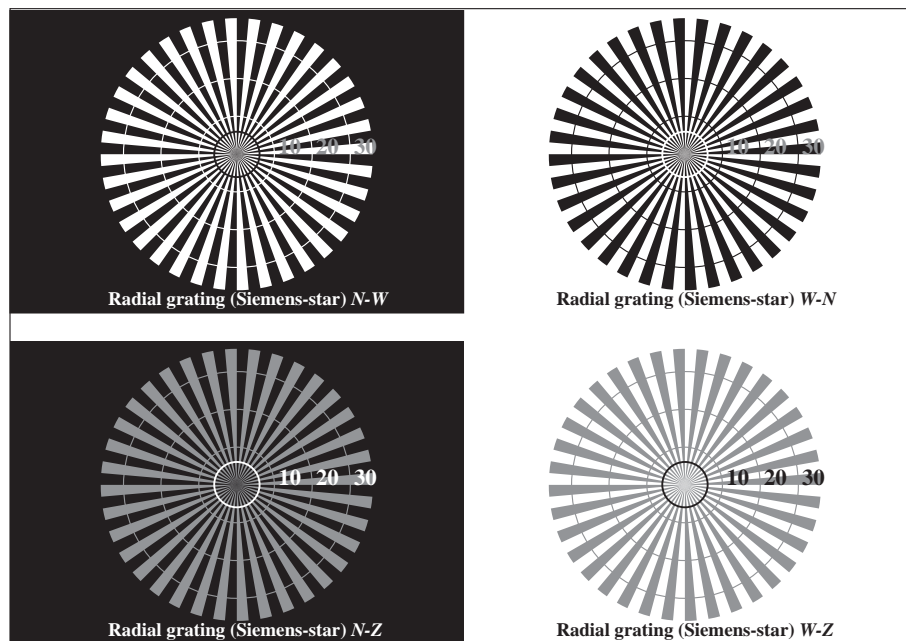

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $000n^* \text{ setcmykcolor}$

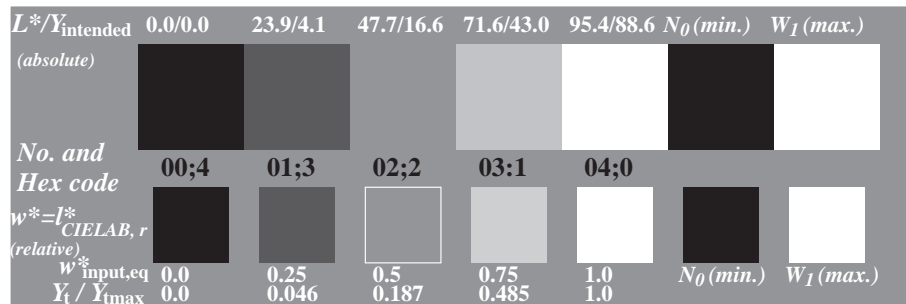

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: $000n^* \text{ setcmykcolor}$

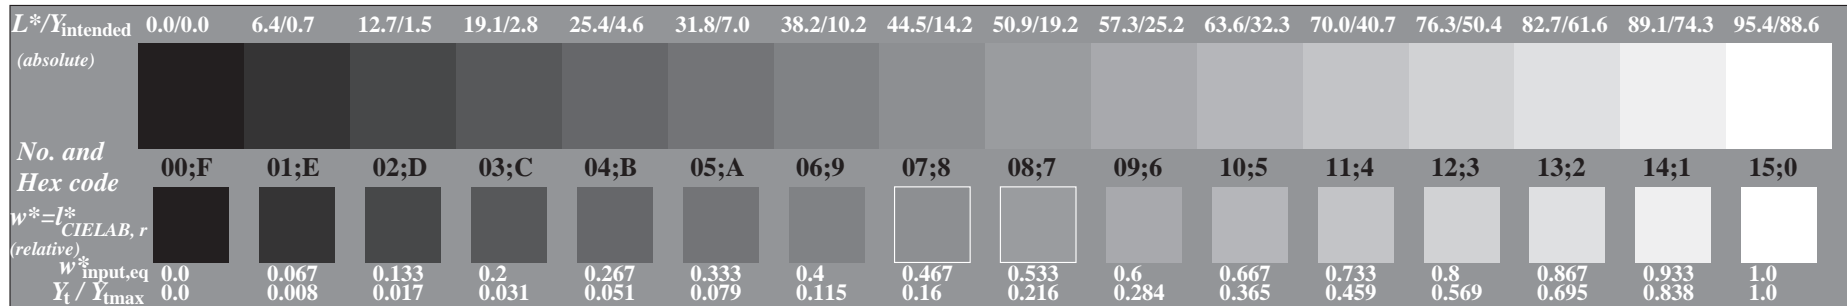


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $000n^* \text{ setcmykcolor}$

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: $000n^* \text{ setcmykcolor}$


output: no change compared to input

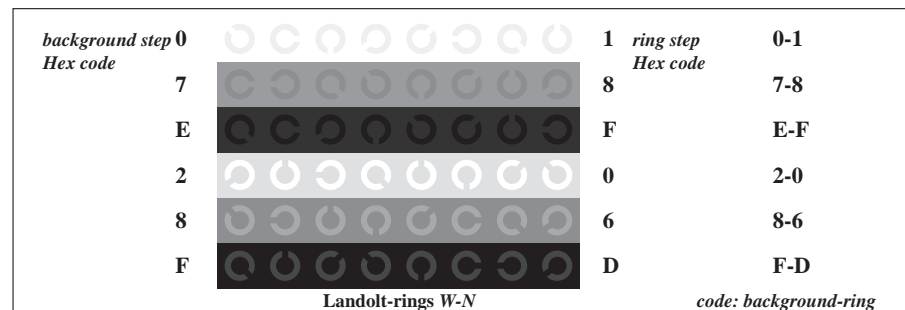


Picture C4: Landolt-rings W-N; PS operator: $000n^* \text{ setcmykcolor}$

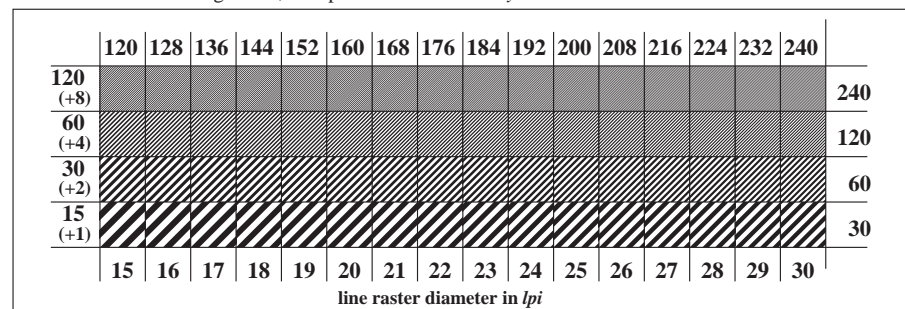


Picture C5: Line raster under 45° (or 135°); PS operator: $000n^* \text{ setcmykcolor}$

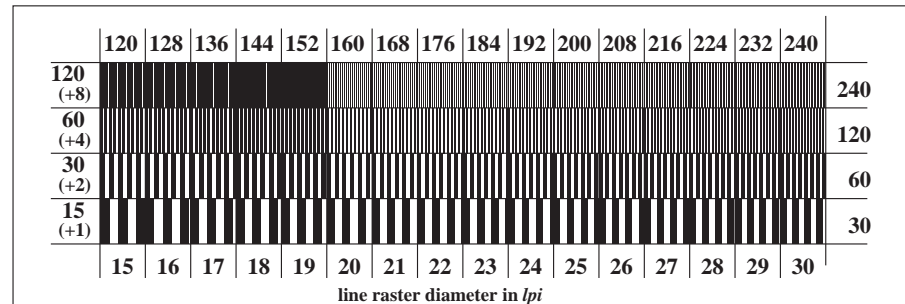


Picture C6: Line raster under 90° (or 0°); Use of the PS operator $000n^* \text{ setcmykcolor}$

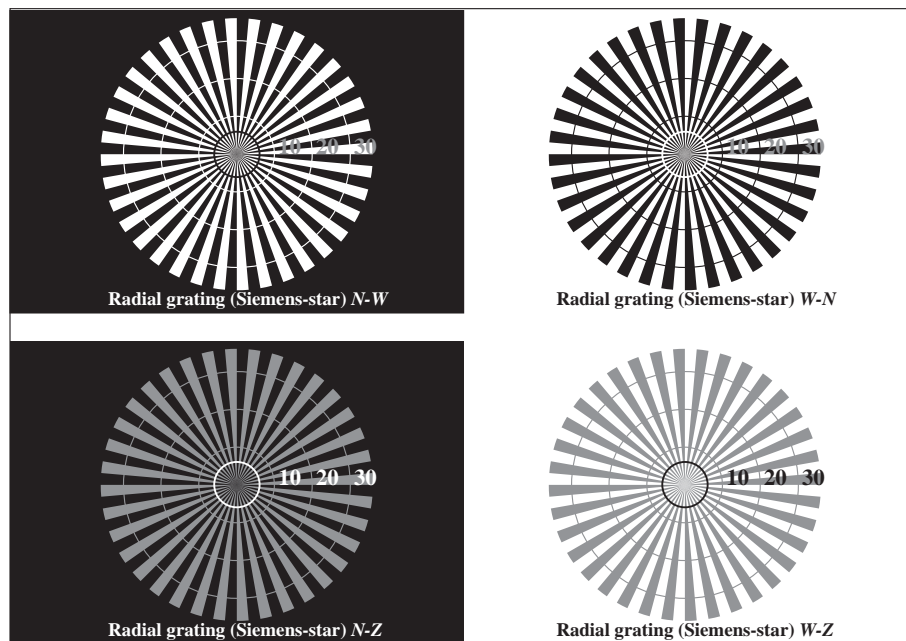

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $000n^* \text{ setcmykcolor}$

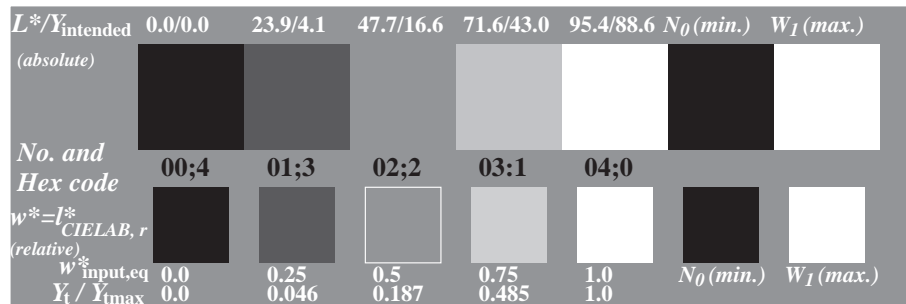

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: $000n^* \text{ setcmykcolor}$

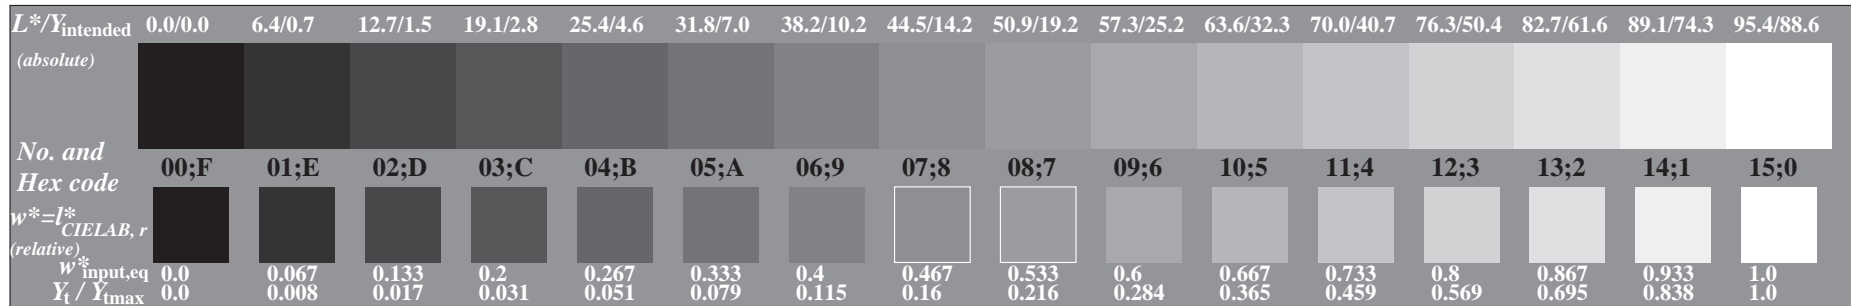


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $000n^* \text{ setcmykcolor}$

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: $000n^* \text{ setcmykcolor}$


output: no change compared to input

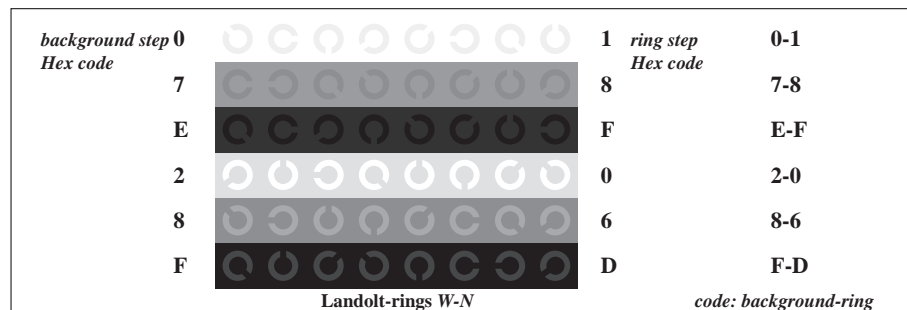




Picture C4: Landolt-rings W-N; PS operator: $000n^* \text{ setcmykcolor}$

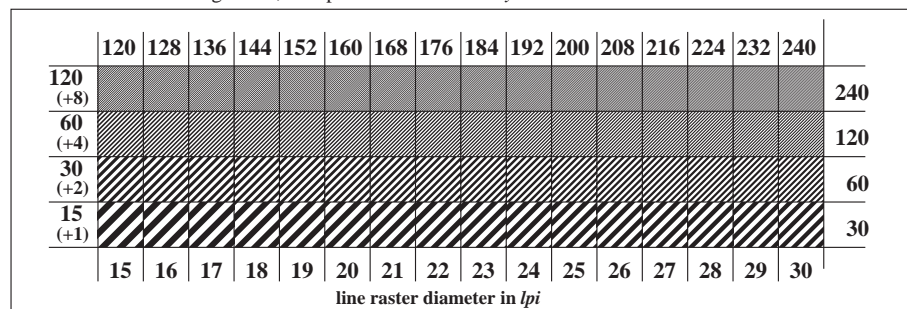

Picture C5: Line raster under 45° (or 135°); PS operator: $000n^* \text{ setcmykcolor}$

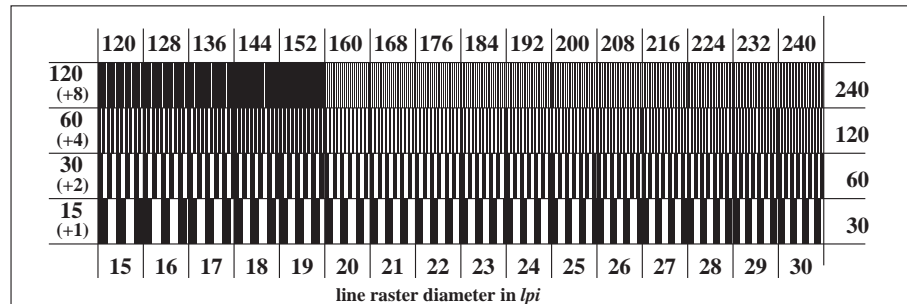




Picture C6: Line raster under 90° (or 0°); Use of the PS operator $000n^* \text{ setcmykcolor}$

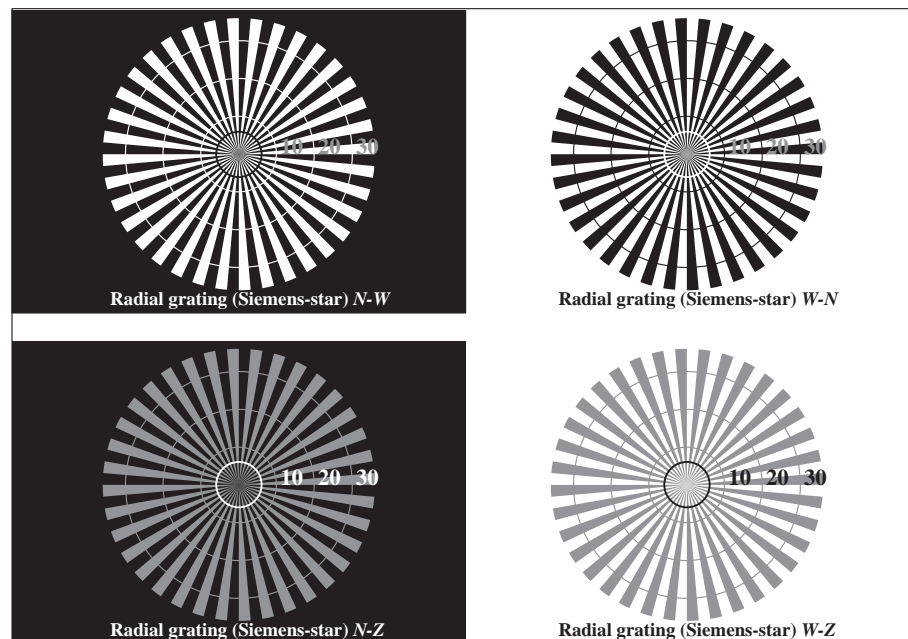
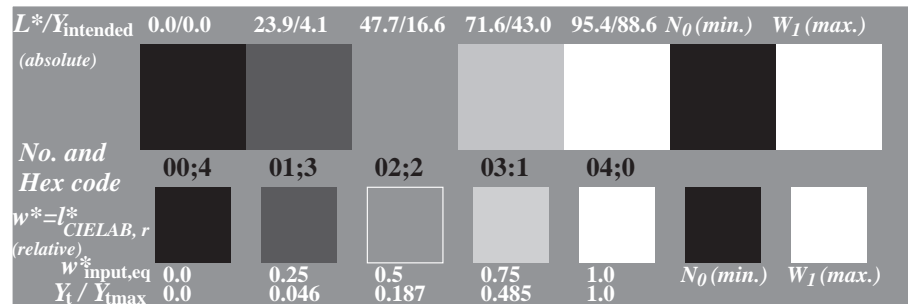
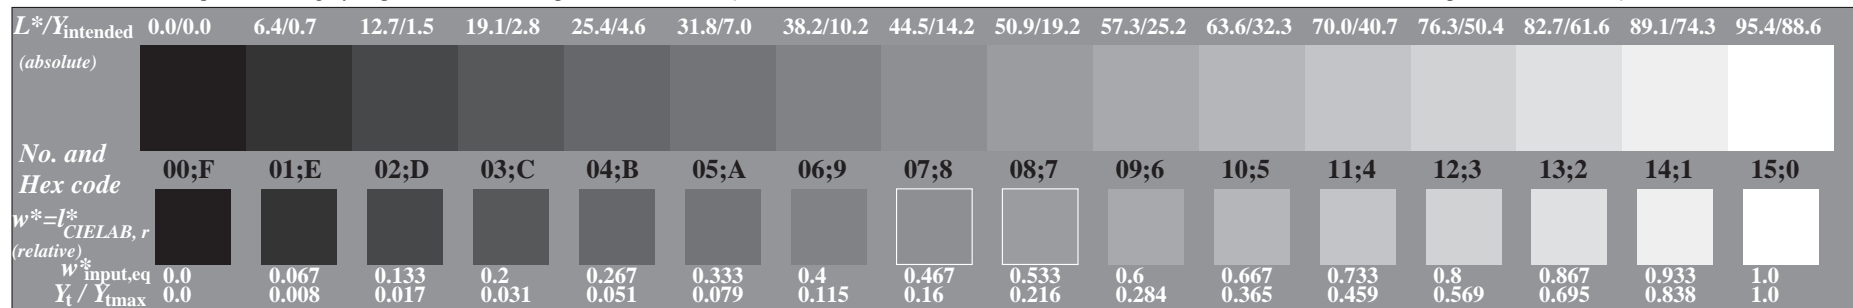
Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $000n^* \text{ setcmykcolor}$ Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: $000n^* \text{ setcmykcolor}$ Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $000n^* \text{ setcmykcolor}$ ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$

Ergonomics – Visual Displays – Field Assessment Methods

input: $000n^* \text{ setcmykcolor}$

output: no change compared to input

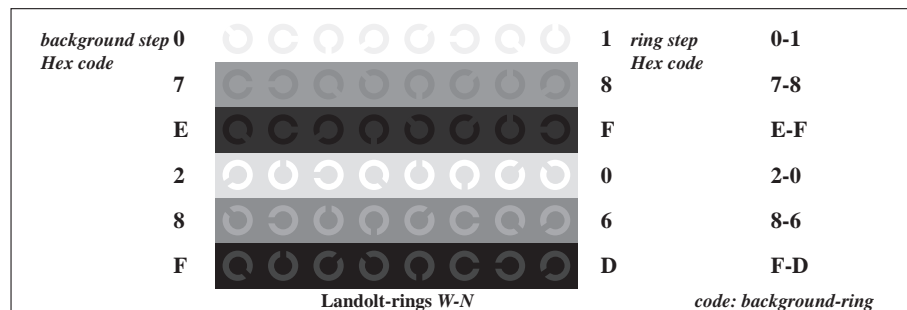
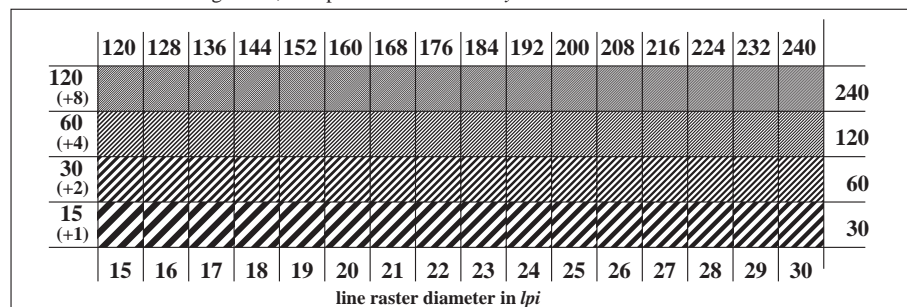
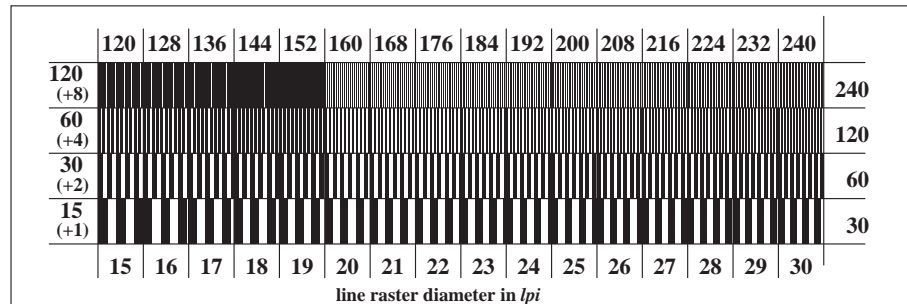
Picture C4: Landolt-rings W-N; PS operator: $000n^* \text{ setcmykcolor}$ Picture C5: Line raster under 45° (or 135°); PS operator: $000n^* \text{ setcmykcolor}$ Picture C6: Line raster under 90° (or 0°); Use of the PS operator $000n^* \text{ setcmykcolor}$

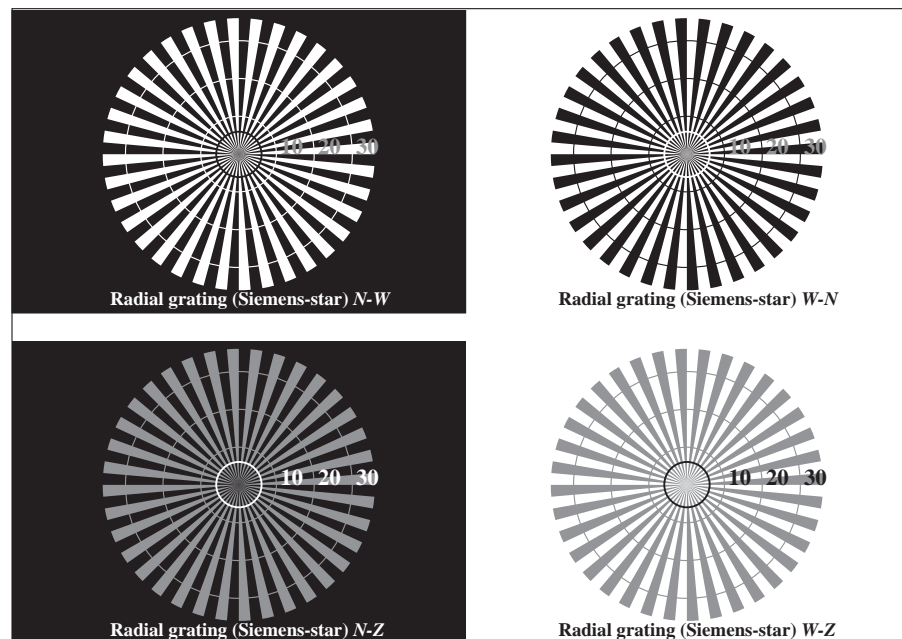
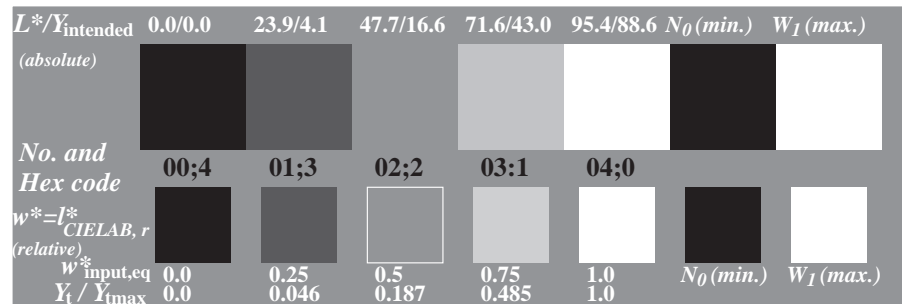
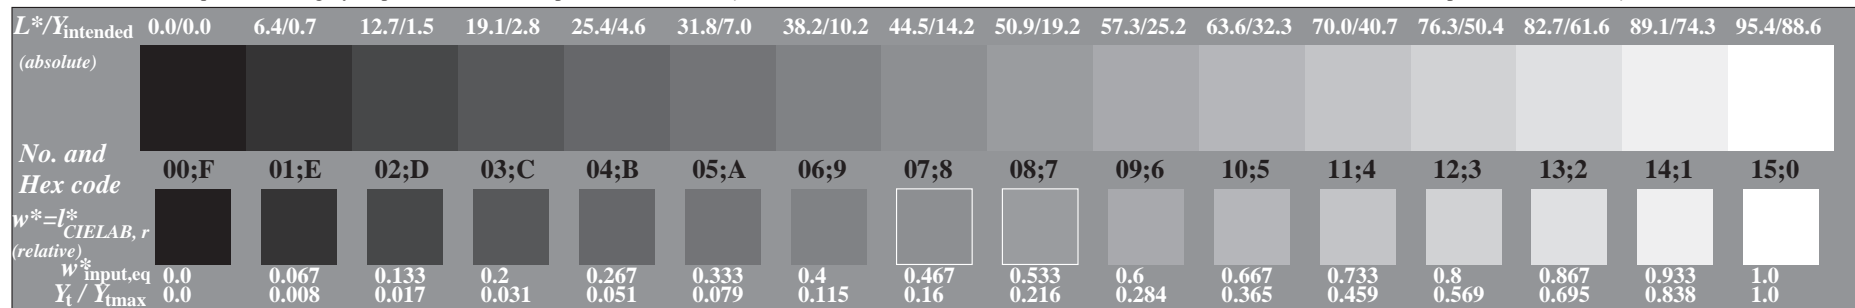
Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $000n^* \text{ setcmykcolor}$ Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: $000n^* \text{ setcmykcolor}$ Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $000n^* \text{ setcmykcolor}$ ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$

Ergonomics – Visual Displays – Field Assessment Methods

input: $000n^* \text{ setcmykcolor}$

output: no change compared to input

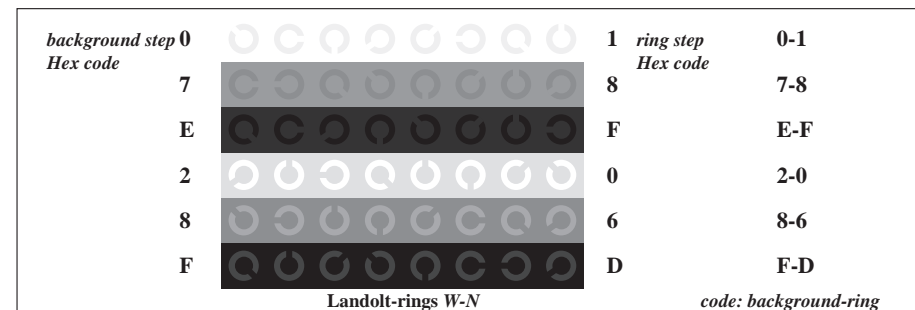
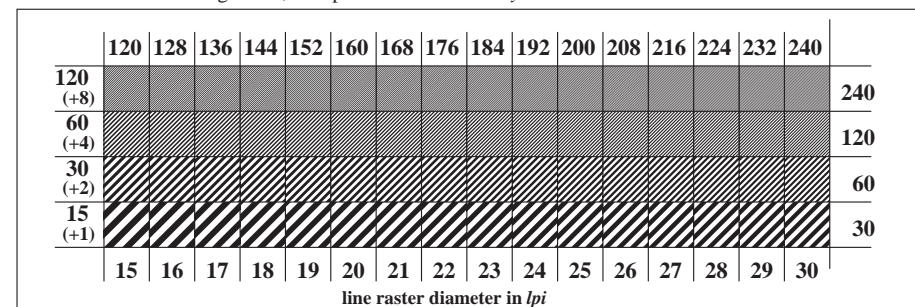
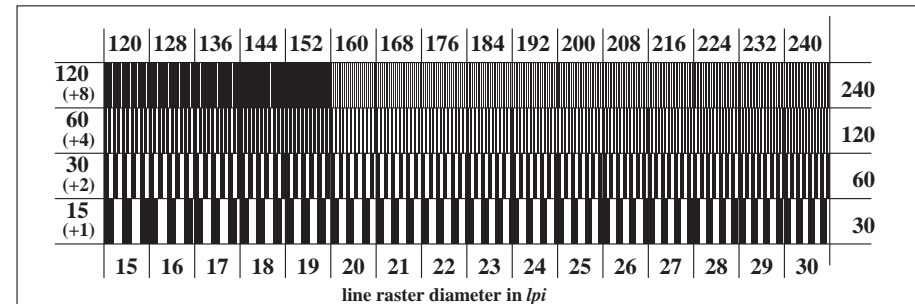
Picture C4: Landolt-rings W-N; PS operator: $000n^* \text{ setcmykcolor}$ Picture C5: Line raster under 45° (or 135°); PS operator: $000n^* \text{ setcmykcolor}$ Picture C6: Line raster under 90° (or 0°); Use of the PS operator $000n^* \text{ setcmykcolor}$

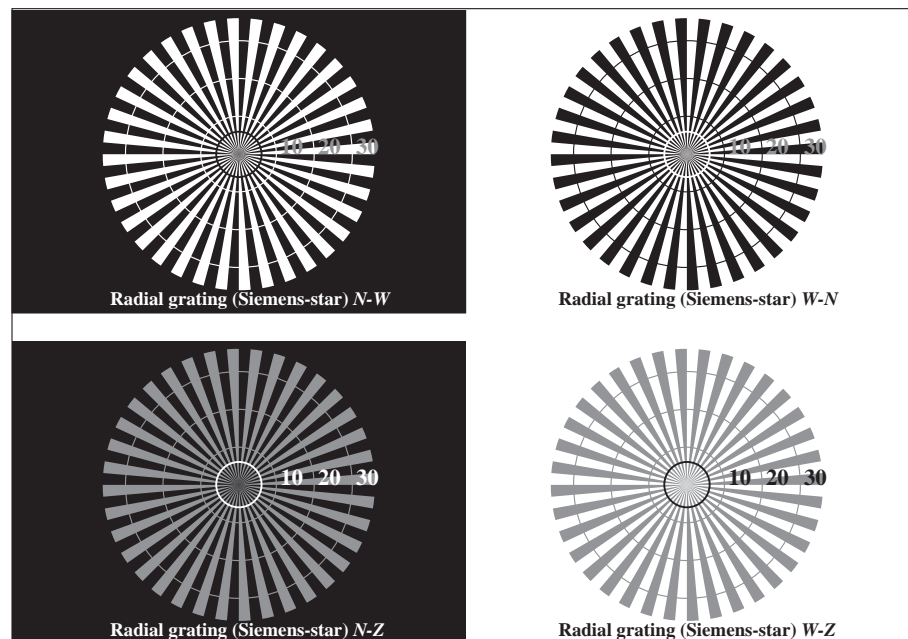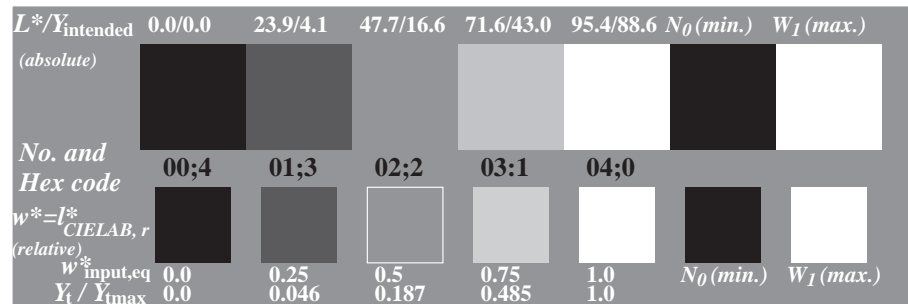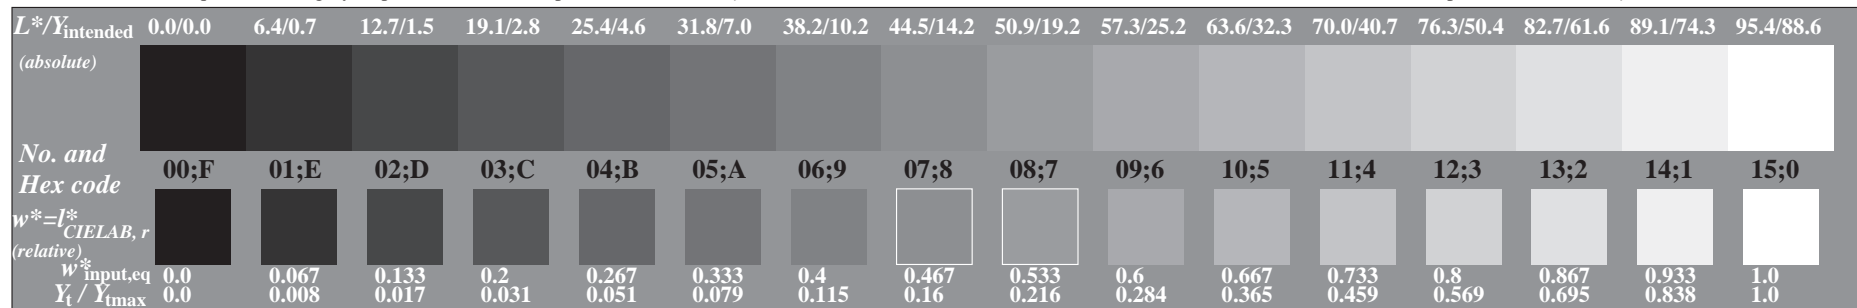
Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $000n^* \text{ setcmykcolor}$ Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: $000n^* \text{ setcmykcolor}$ Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $000n^* \text{ setcmykcolor}$ ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$

Ergonomics – Visual Displays – Field Assessment Methods


input: $000n^* \text{ setcmykcolor}$

output: no change compared to input

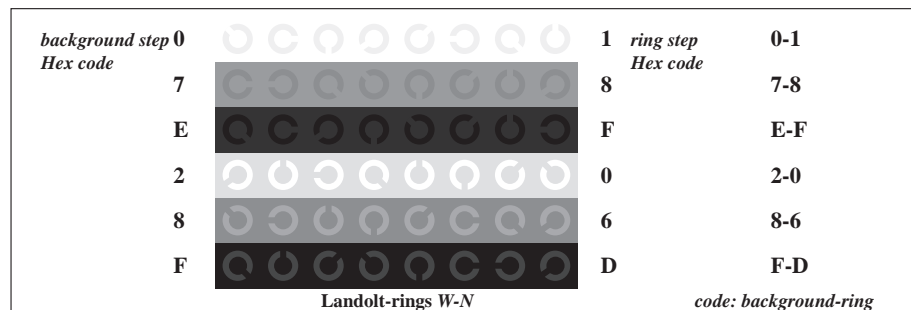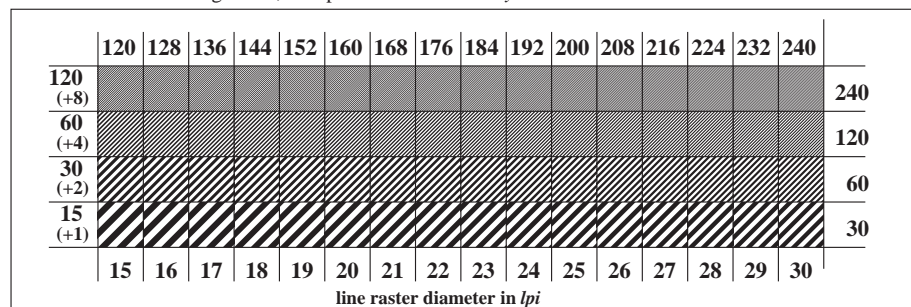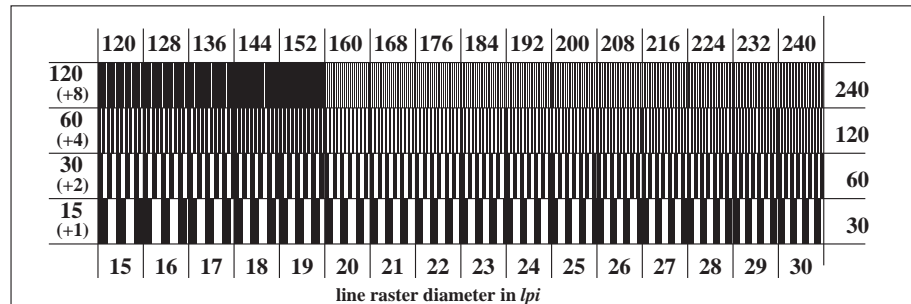
Picture C4: Landolt-rings W-N; PS operator: $000n^* \text{ setcmykcolor}$ Picture C5: Line raster under 45° (or 135°); PS operator: $000n^* \text{ setcmykcolor}$ Picture C6: Line raster under 90° (or 0°); Use of the PS operator $000n^* \text{ setcmykcolor}$

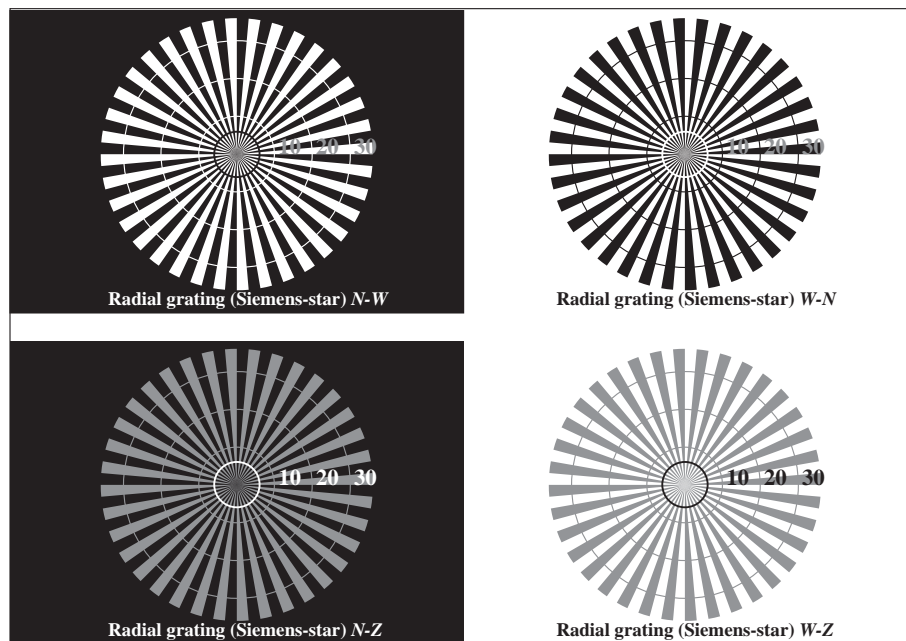

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $000n^* \text{ setcmykcolor}$

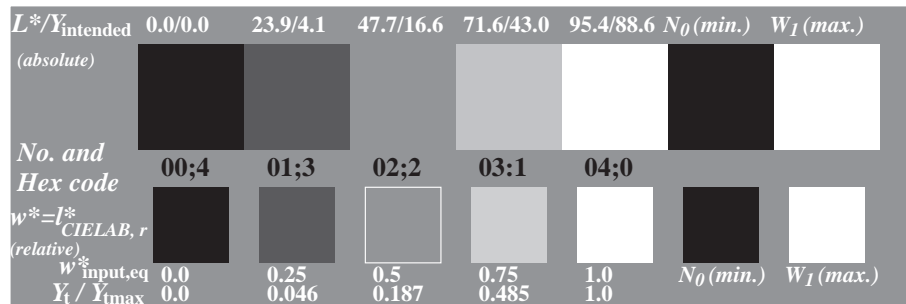

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: $000n^* \text{ setcmykcolor}$

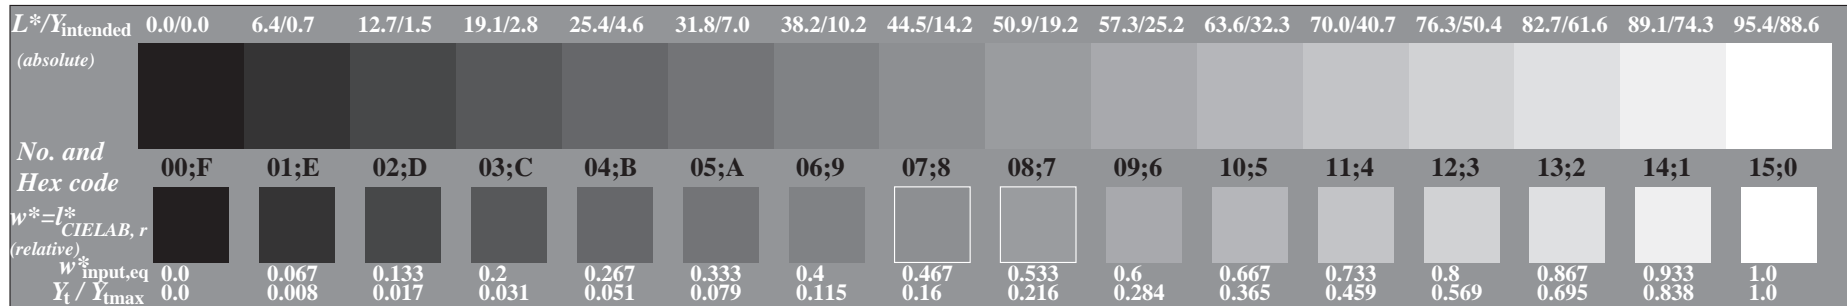


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $000n^* \text{ setcmykcolor}$

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: $000n^* \text{ setcmykcolor}$


output: no change compared to input

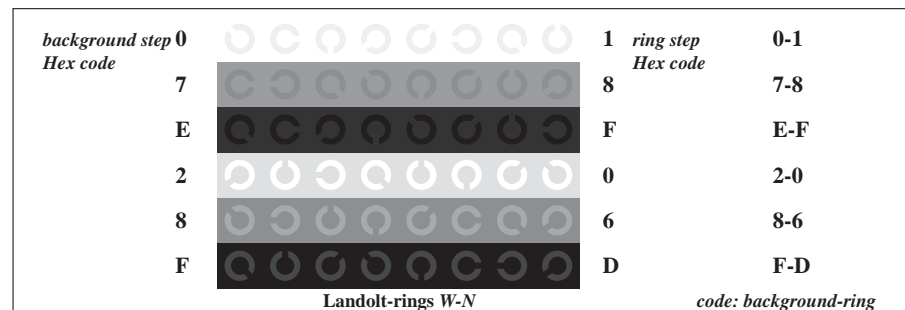

Picture C4: Landolt-rings W-N; PS operator: $000n^* \text{ setcmykcolor}$

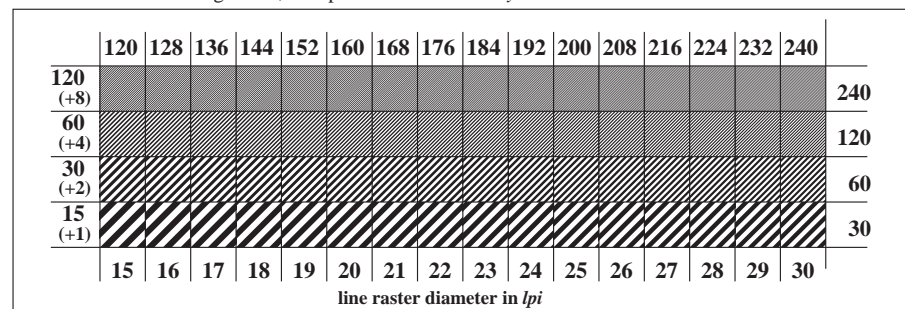

Picture C5: Line raster under 45° (or 135°); PS operator: $000n^* \text{ setcmykcolor}$

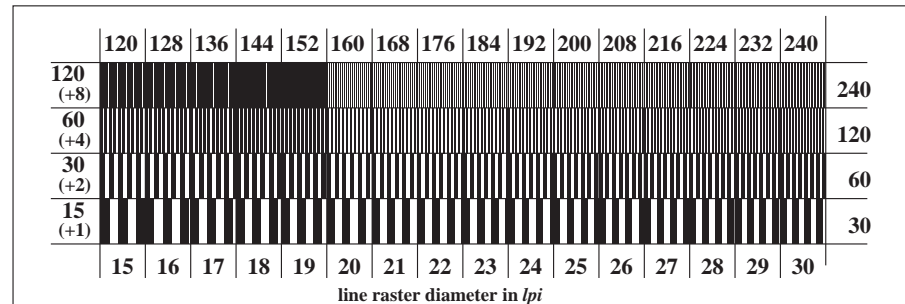

Picture C6: Line raster under 90° (or 0°); Use of the PS operator $000n^* \text{ setcmykcolor}$