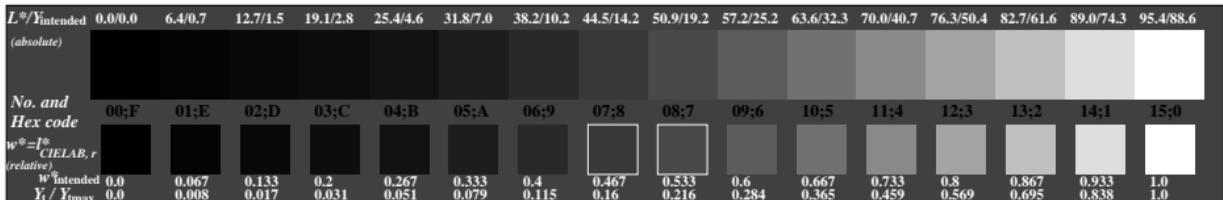
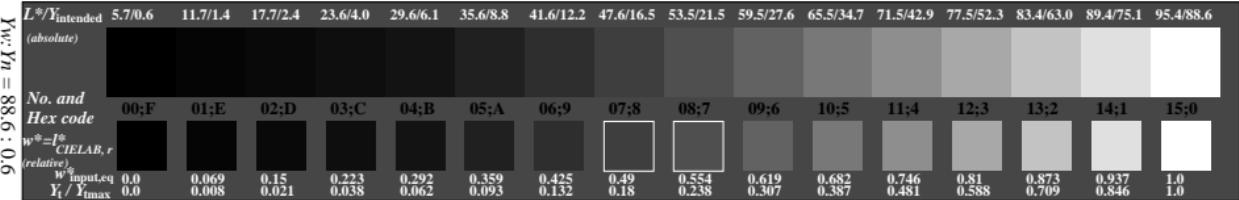
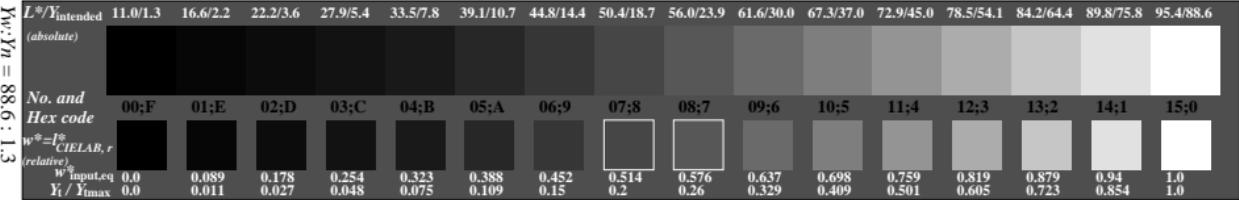
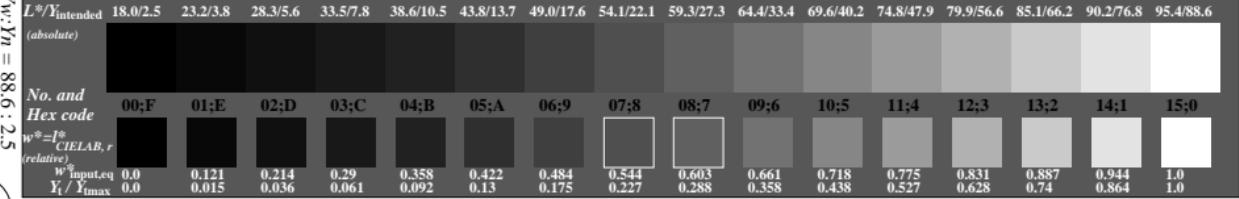


www.ps.bam.de/CE71/10S/S71E00F1.PS/.TXT; linearized output  
 F: Output Linearization (OL) data CE71/10S/S71E00F1.DAT in File (F)

Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator:  $w^*$  setgrayPicture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator:  $w^*$  setgrayPicture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator:  $w^*$  setgrayPicture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator:  $w^*$  setgray

ISO 9241-test chart for four different contrast ranges  
 Ergonomics – Visual Displays – Field Assessment Methods

input:  $w^*$  setgray  
 output: no change compared to input






Application for achromatic display output with CIELAB contrast range  
 $L^*/w \cdot L^*_n = 95.4 : 38.0$

$L^*/v \cdot L^*_n = 95.4 : 52.0$

$L^*/y \cdot L^*_n = 95.4 : 52.0$

$L^*/m \cdot L^*_n = 95.4 : 69.7$

www.ps.bam.de/CE71/10S/S71E00F1.PS/.TXT; linearized output  
 F: Output Linearization (OL) data CE71/10S/S71E00F1.DAT in File (F)

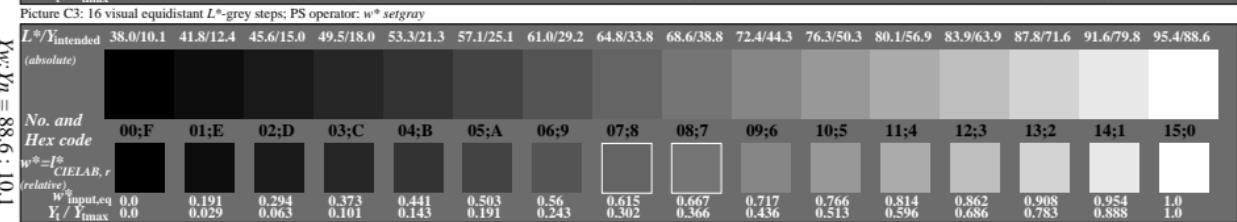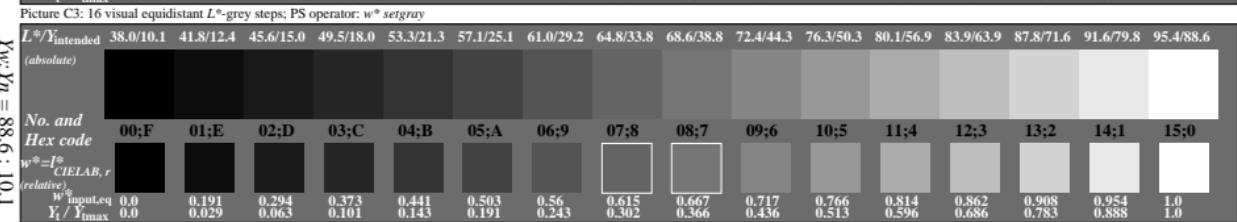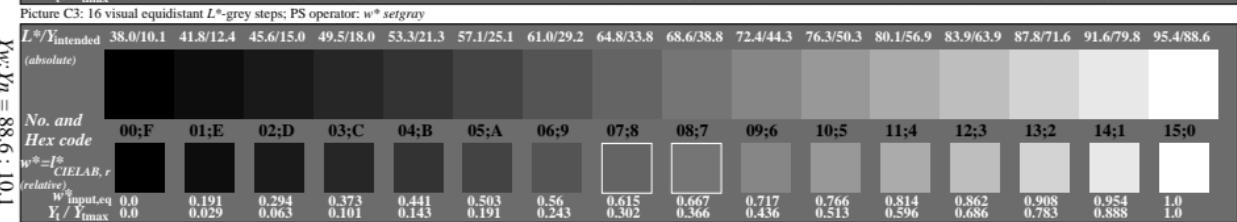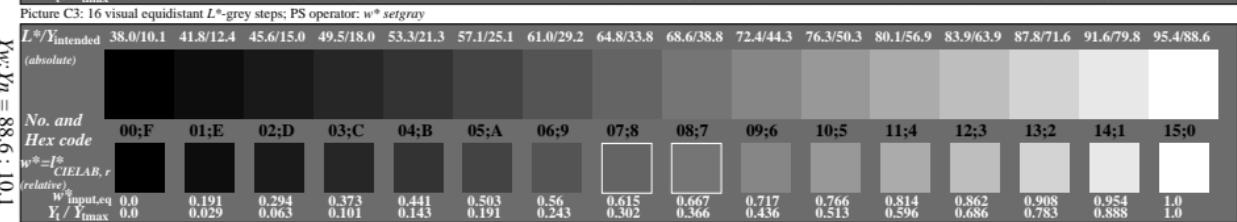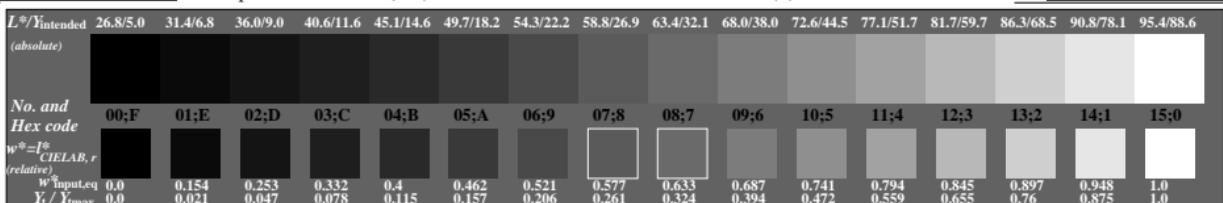

ISO 9241-test chart for four different contrast ranges  
 Ergonomics – Visual Displays – Field Assessment Methods

input:  $w^*$  setgray  
 output: no change compared to input