



See for similar files: <http://www.ps.bam.de/CE75/>  
Technical information: <http://www.ps.bam.de/9241>

Version 2.0, io=0.0, CIE LAB, 1.0 exp


BAM registration: 20040101-CE75/10L/L75E00NP.PS/.PDF BAM material: code=rh4ta  
Application for achromatic display output with CIE LAB contrast range  $L^*:W:L^*\eta = 95.4 : 0.0$

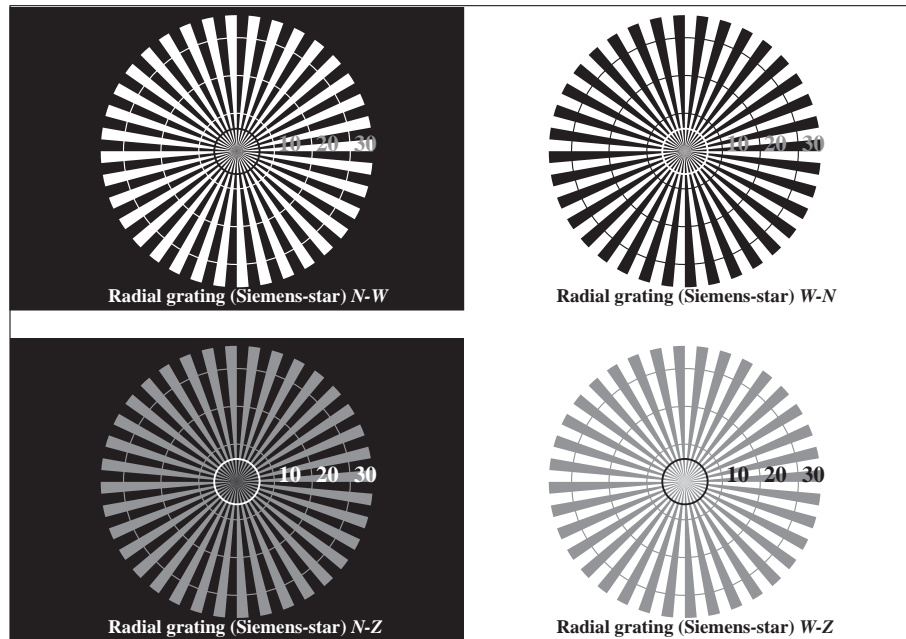

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n\* setcmykcolor

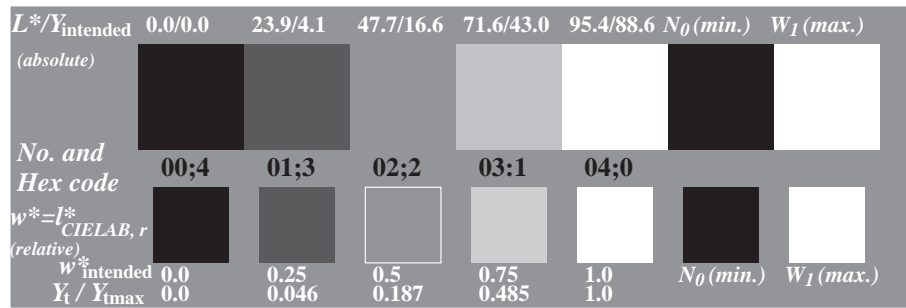

Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: 000n\* setcmykcolor

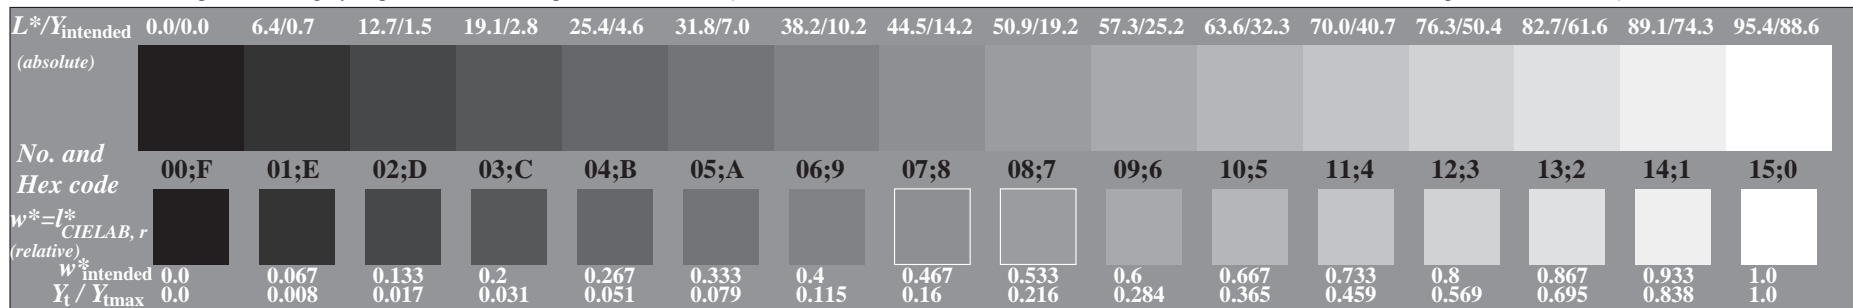


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: 000n\* setcmykcolor

ISO 9241-test chart for contrast range  $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: 000n\* setcmykcolor


output: no change compared to input

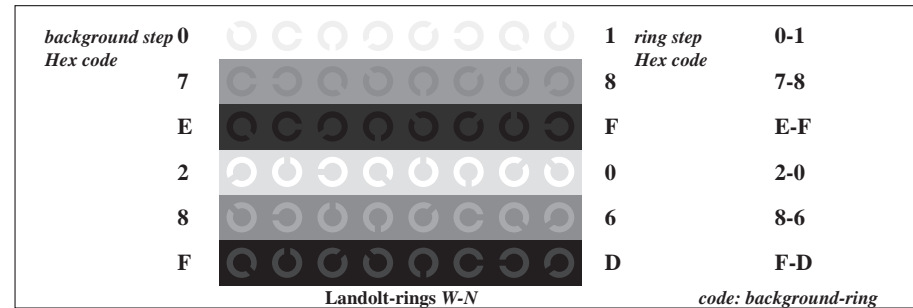

Picture C4: Landolt-rings W-N; PS operator: 000n\* setcmykcolor

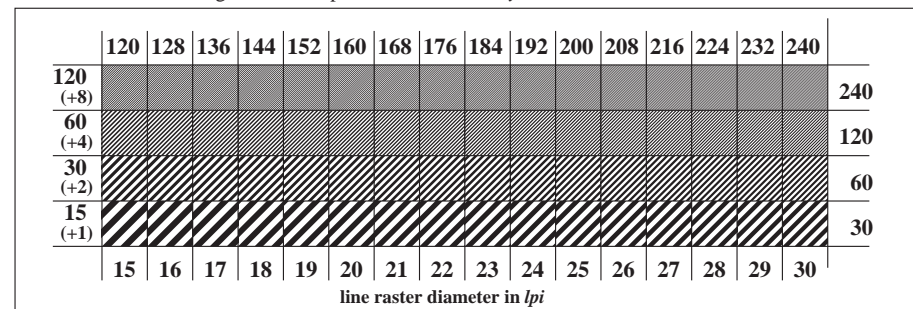

Picture C5: Line raster under 45° (or 135°); PS operator: 000n\* setcmykcolor

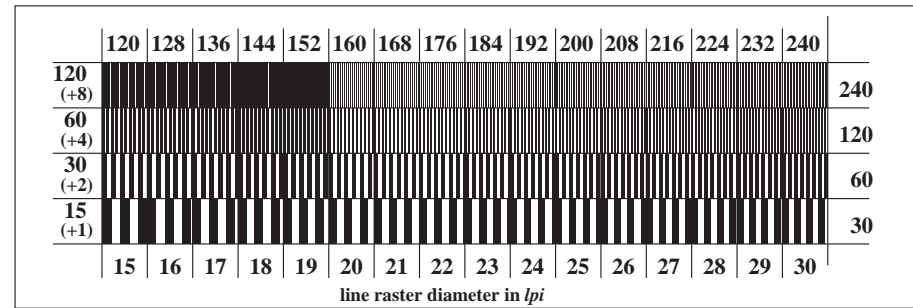

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n\* setcmykcolor