



Radial grating (Siemens-star) N-W


Radial grating (Siemens-star) W-N

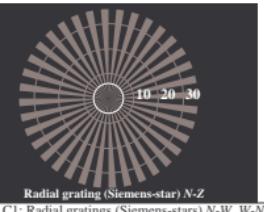


Radial grating (Siemens-star) N-Z

Radial grating (Siemens-star) W-Z

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator:  $nnn0^*$  setcmykcolor

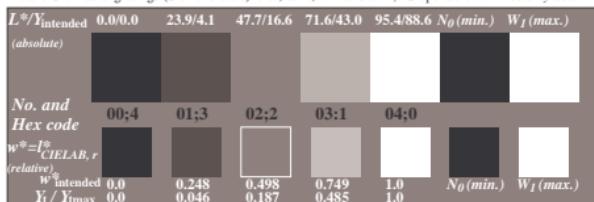

Picture C2: 5 visual equidistant  $L^*/Y$ -grey steps +  $N_0 + W_1$ ; PS operator: cmy0\* setcmykcolor

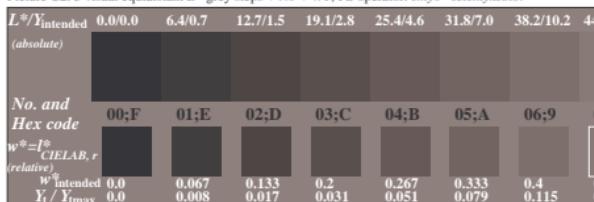


Picture C3: 16 visual equidistant  $L^*/Y$ -grey steps; PS operator:  $nnn0^*$  setcmykcolor

ISO 9241-test chart for contrast range  $Y_w:Y_n = 88.6 : 0.0$   
 Ergonomics – Visual Displays – Field Assessment Methods


background step 0 Hex code	1 ring step Hex code	0-1
7	8	7-8
E	F	E-F
2	0	2-0
8	6	8-6
F	D	F-D

Landolt-rings W-N


code: background-ring

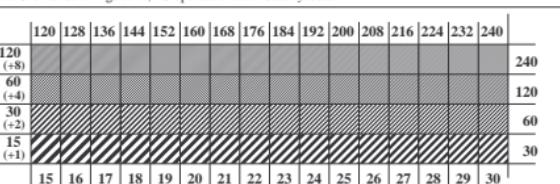

Picture C5: Line raster under  $45^\circ$  (or  $135^\circ$ ); PS operator:  $nnn0^*$  setcmykcolor

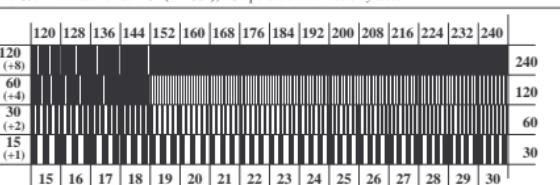

Picture C6: Line raster under  $90^\circ$  (or  $0^\circ$ ); Use of the PS operator  $nnn0^*$  setcmykcolor

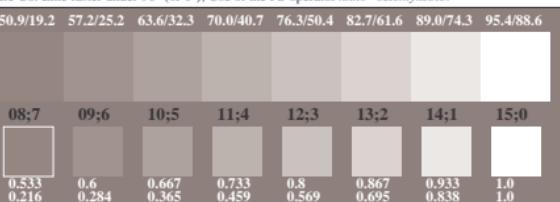

input:  $nnn0^*$  setcmykcolor  
 output: no change compared to input