



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: `www* setrgbcolor`

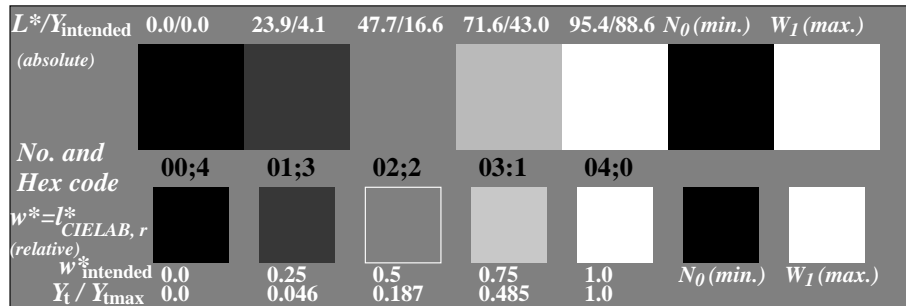

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: `www* setrgbcolor`

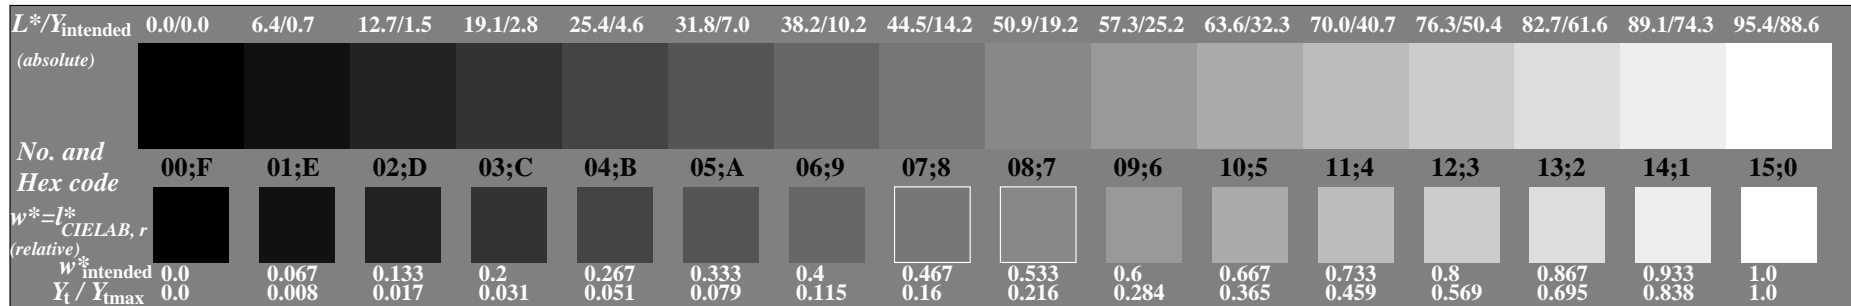


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: `www* setrgbcolor`

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: `www* setrgbcolor`


output: *no change compared to input*

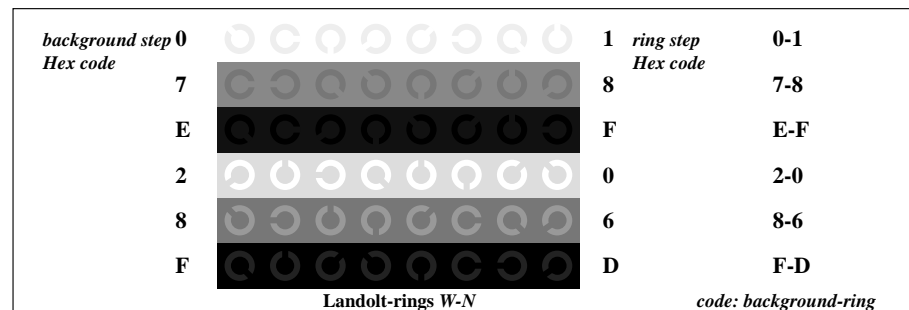

Picture C4: Landolt-rings W-N; PS operator: `www* setrgbcolor`

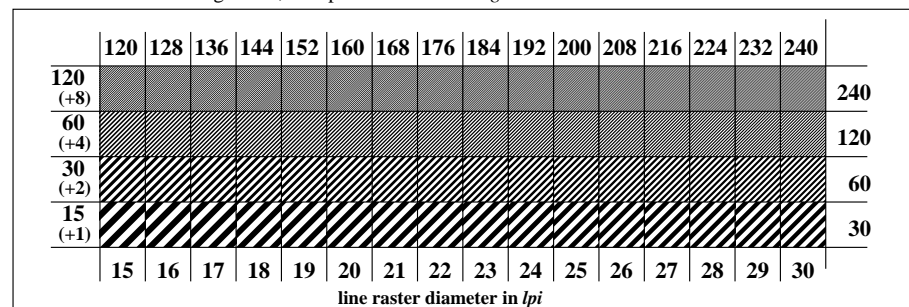

Picture C5: Line raster under 45° (or 135°); PS operator: `www* setrgbcolor`

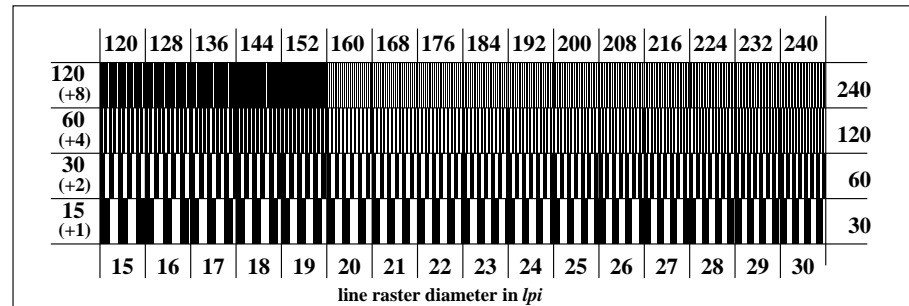


Picture C6: Line raster under 90° (or 0°); Use of the PS operator `www* setrgbcolor`


See for similar files: <http://www.ps.bam.de/CE78/>
Technical information: <http://www.ps.bam.de/9241>

Version 2.0, io=3.3, CIE LAB, 1.0 exp


BAM registration: 20040101-CE78/10L/L78E10SP.PS/.PDF BAM material: code=rh4ta
Application for achromatic display output with CIE LAB contrast range $L^*:W:L^*\eta = 95.4 : 0.0$

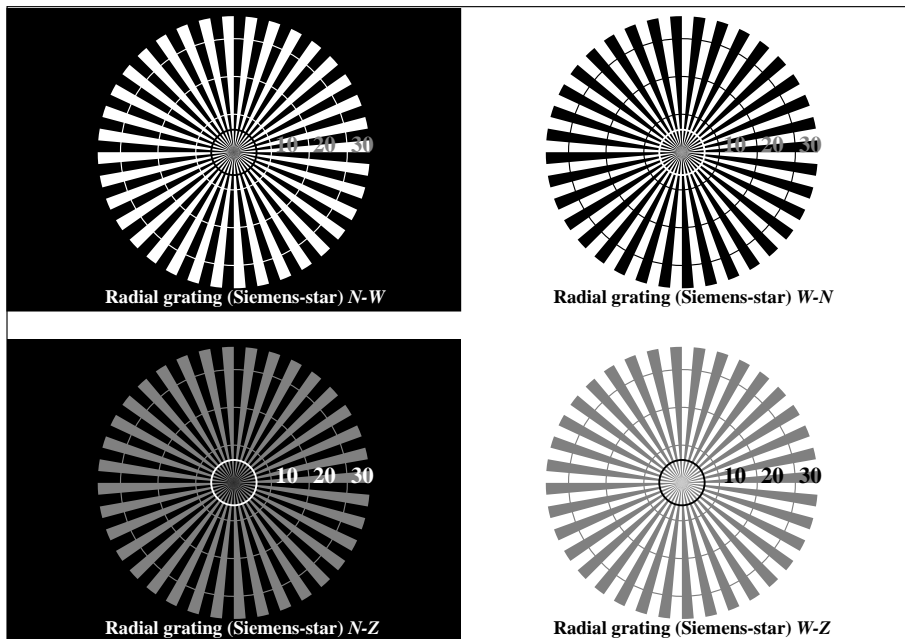

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *www* setrgbcolor*

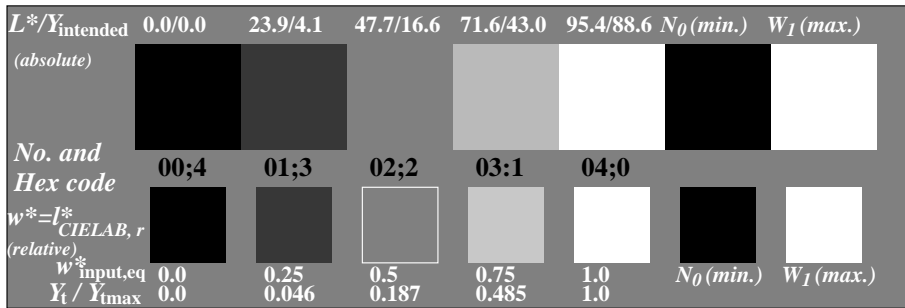

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *www* setrgbcolor*

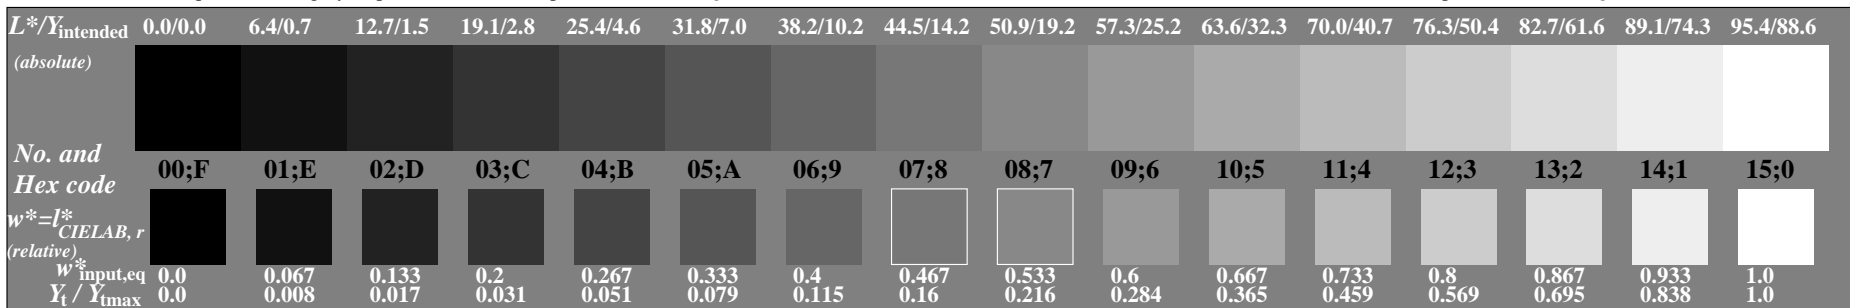


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: *www* setrgbcolor*


output: *no change compared to input*

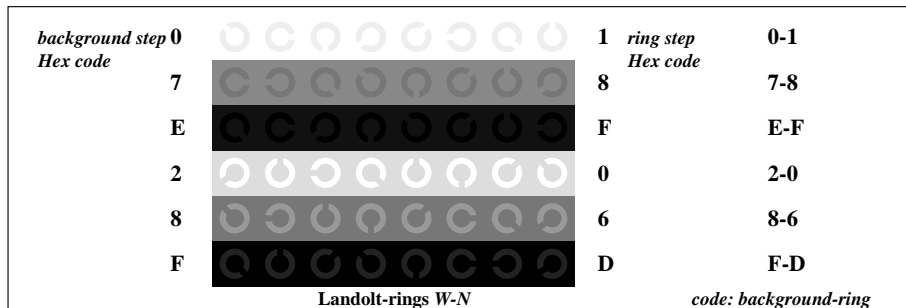


Picture C4: Landolt-rings W-N; PS operator: *www* setrgbcolor*

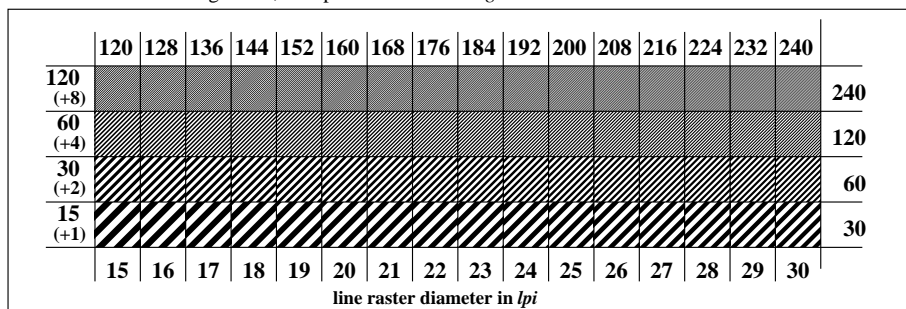


Picture C5: Line raster under 45° (or 135°); PS operator: *www* setrgbcolor*

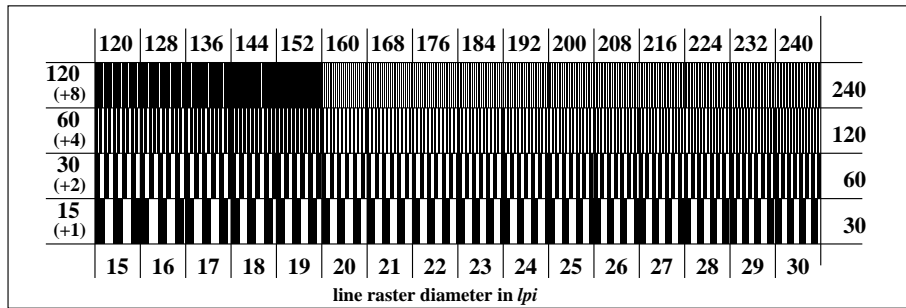


Picture C6: Line raster under 90° (or 0°); Use of the PS operator *www* setrgbcolor*

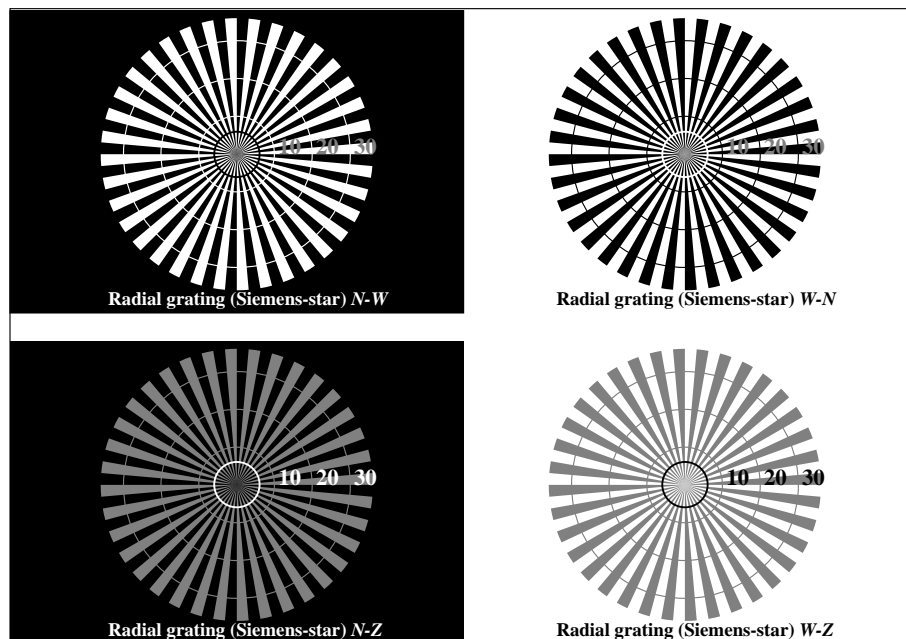

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *www* setrgbcolor*

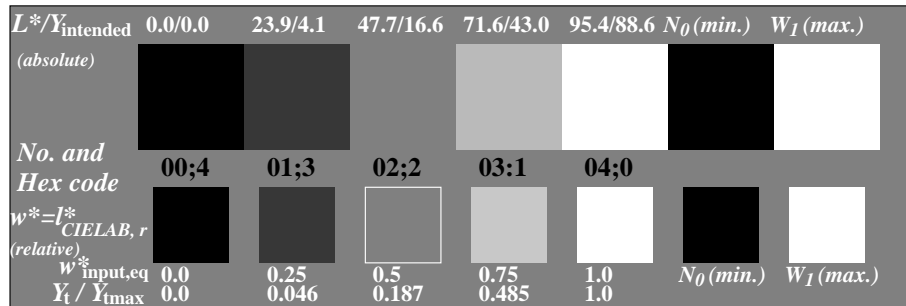

Picture C2: 5 visual equidistant L^* -gray steps + N_0 + W_1 ; PS operator: *www* setrgbcolor*

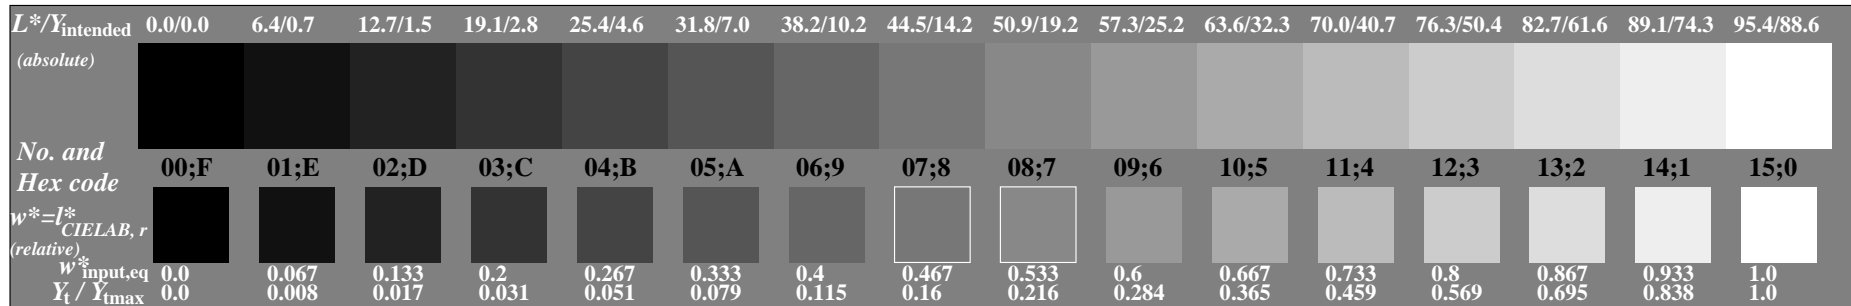


Picture C3: 16 visual equidistant L^* -gray steps; PS operator: *www* setrgbcolor*

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: *www* setrgbcolor*


output: *no change compared to input*

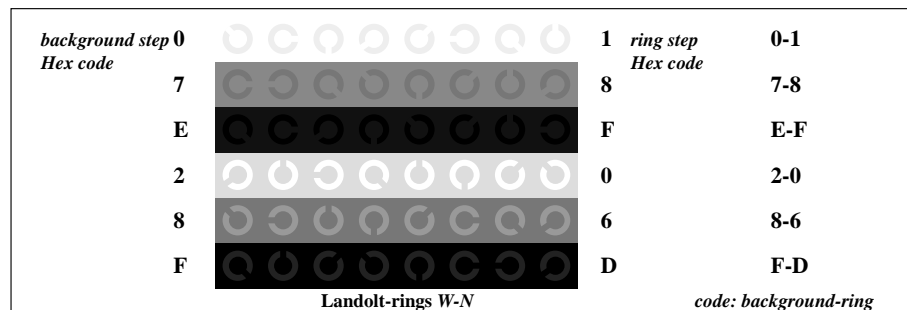


Picture C4: Landolt-rings W-N; PS operator: *www* setrgbcolor*

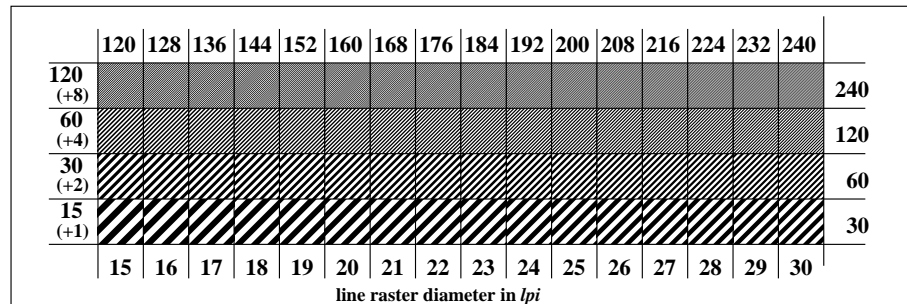


Picture C5: Line raster under 45° (or 135°); PS operator: *www* setrgbcolor*

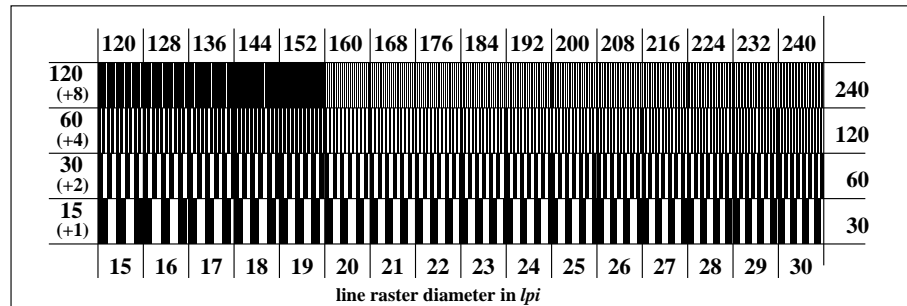


Picture C6: Line raster under 90° (or 0°); Use of the PS operator *www* setrgbcolor*

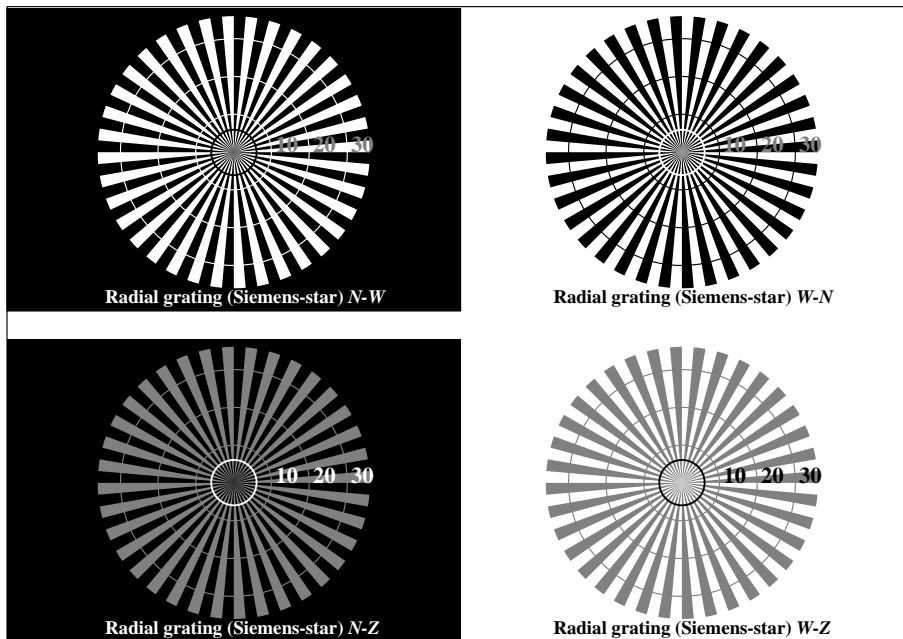

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *www* setrgbcolor*

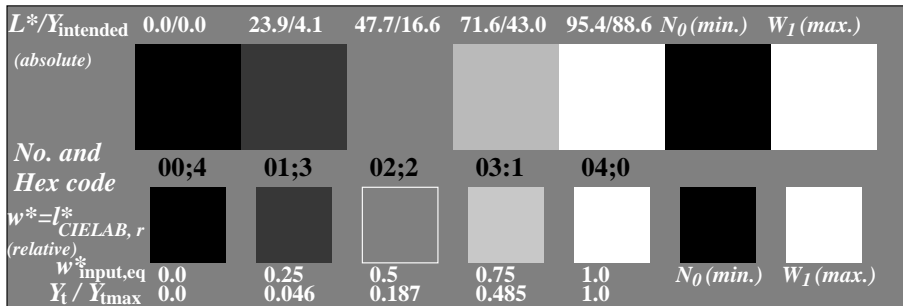

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *www* setrgbcolor*

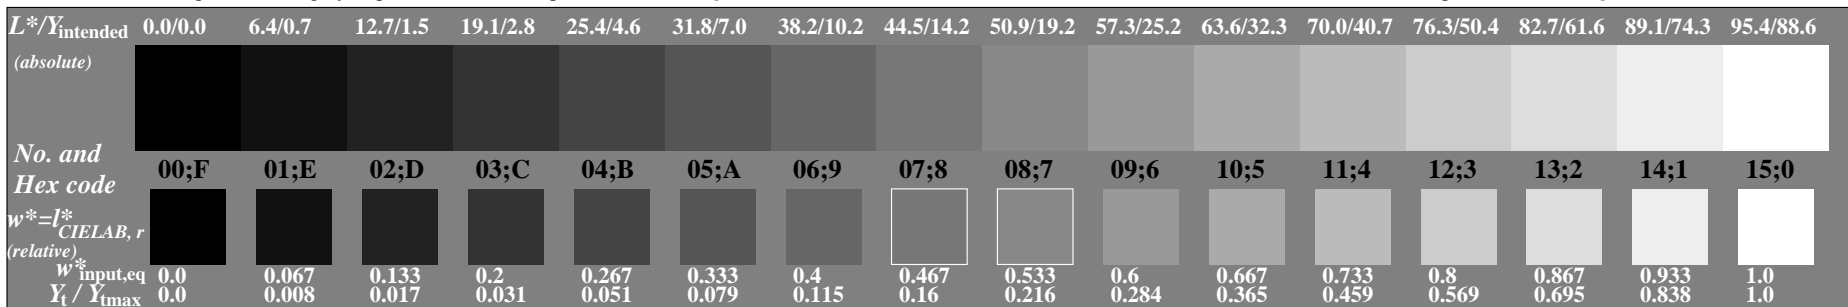


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: *www* setrgbcolor*


output: *no change compared to input*

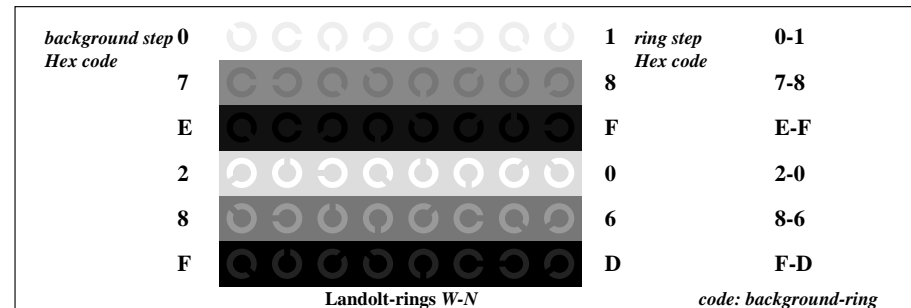


Picture C4: Landolt-rings W-N; PS operator: *www* setrgbcolor*

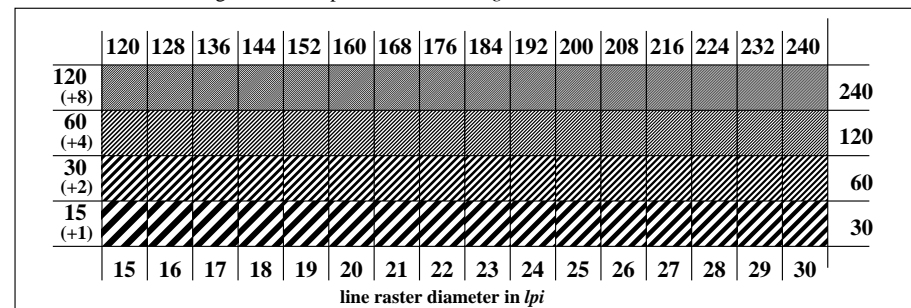


Picture C5: Line raster under 45° (or 135°); PS operator: *www* setrgbcolor*

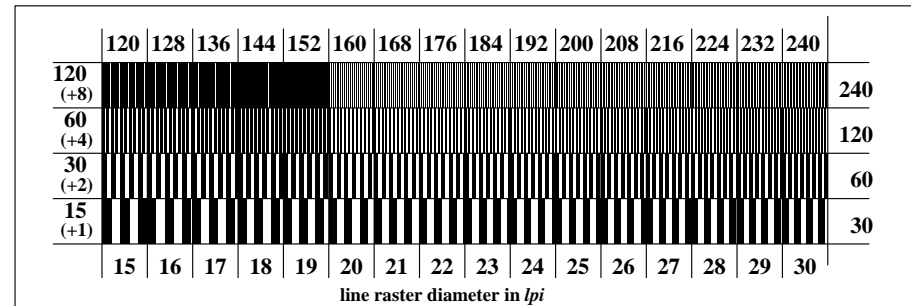


Picture C6: Line raster under 90° (or 0°); Use of the PS operator *www* setrgbcolor*

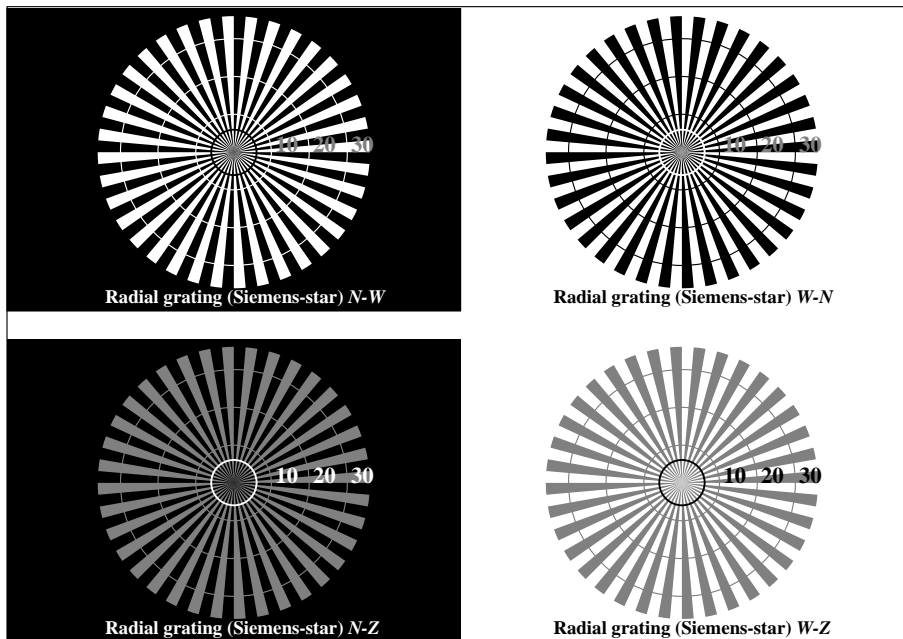

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *www* setrgbcolor*

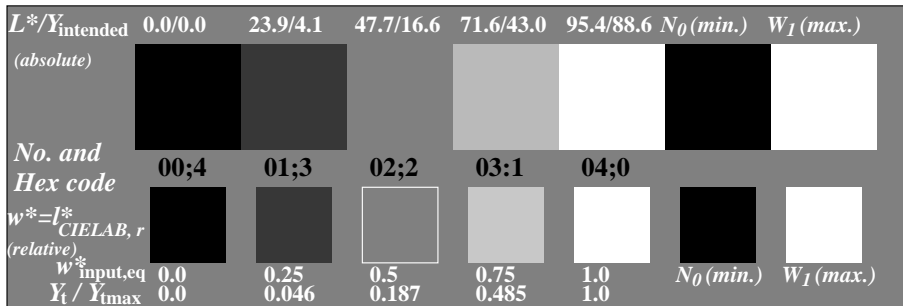

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *www* setrgbcolor*

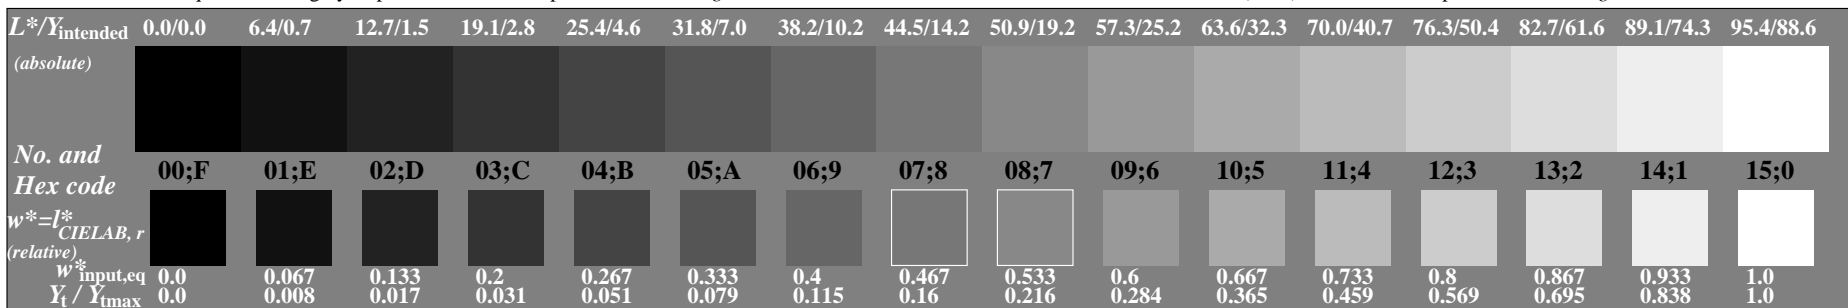


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: *www* setrgbcolor*


output: *no change compared to input*

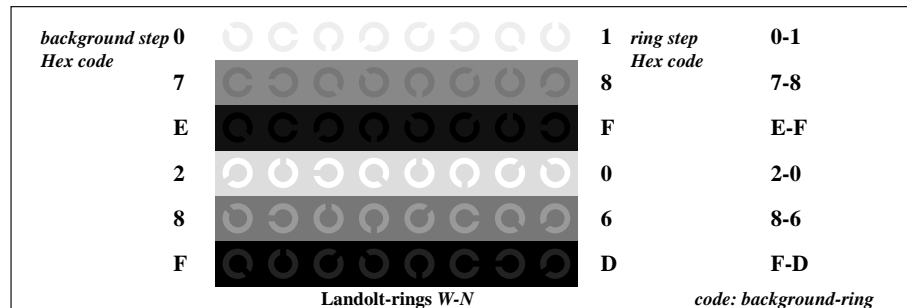


Picture C4: Landolt-rings W-N; PS operator: *www* setrgbcolor*

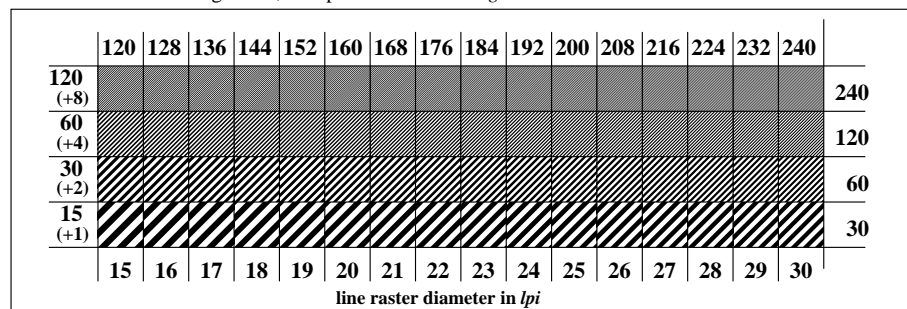


Picture C5: Line raster under 45° (or 135°); PS operator: *www* setrgbcolor*

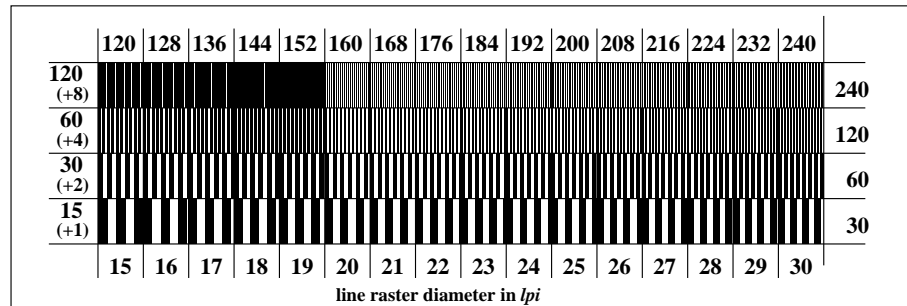


Picture C6: Line raster under 90° (or 0°); Use of the PS operator *www* setrgbcolor*

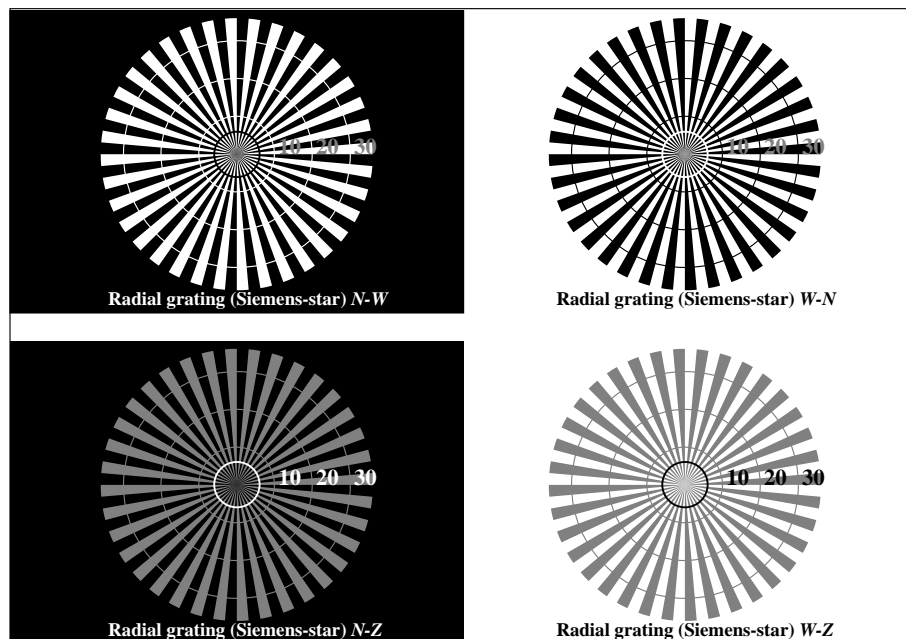

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *www* setrgbcolor*

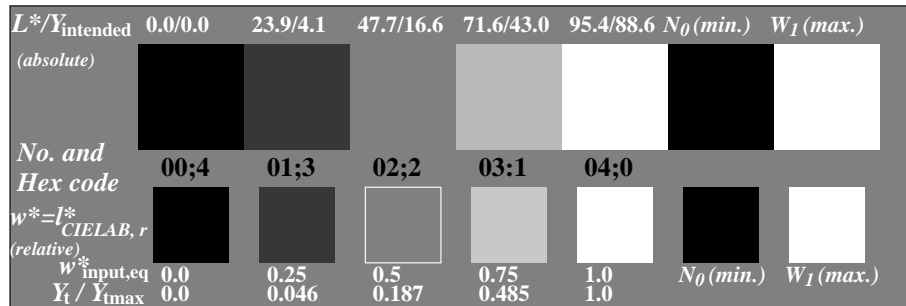

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *www* setrgbcolor*

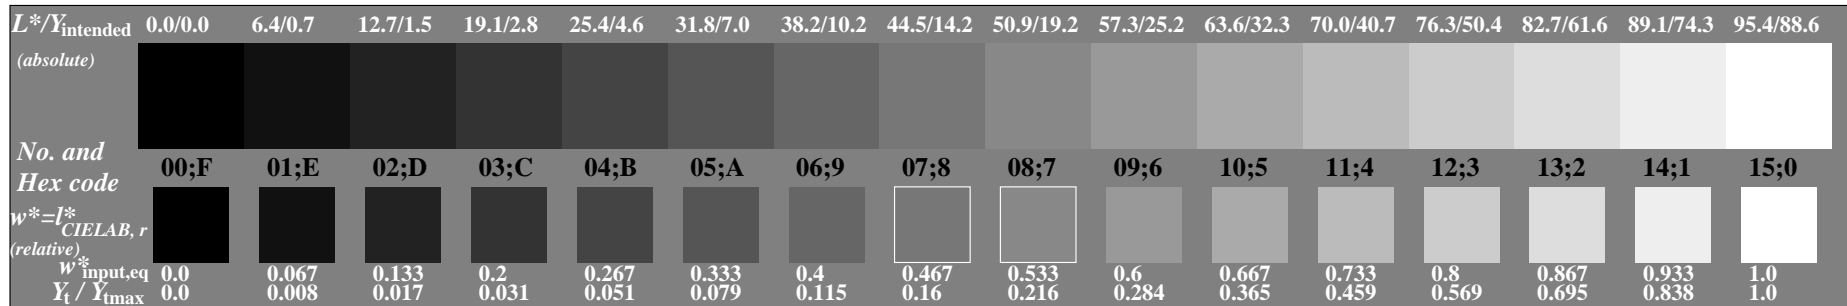


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: *www* setrgbcolor*


output: *no change compared to input*

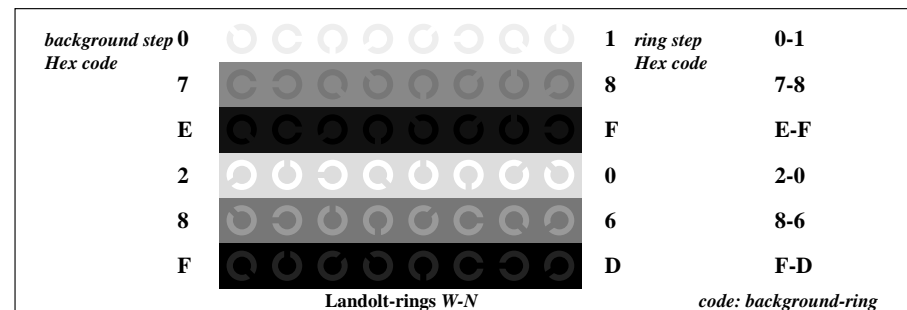

Picture C4: Landolt-rings W-N; PS operator: *www* setrgbcolor*

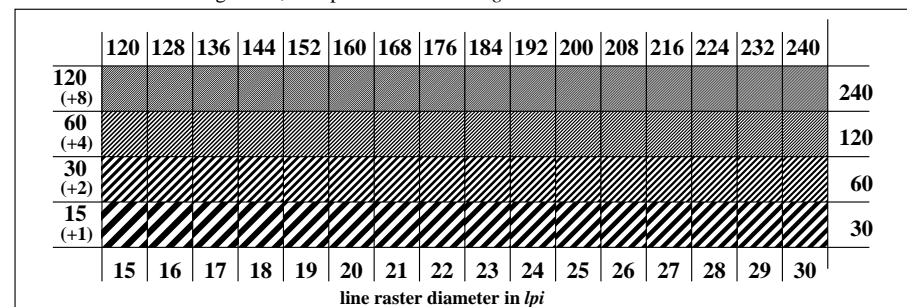

Picture C5: Line raster under 45° (or 135°); PS operator: *www* setrgbcolor*

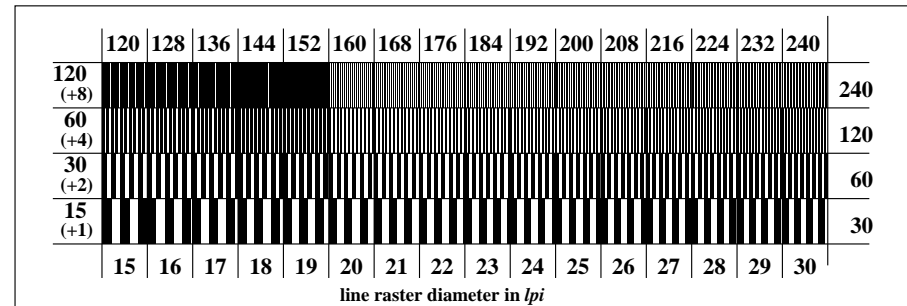


Picture C6: Line raster under 90° (or 0°); Use of the PS operator *www* setrgbcolor*


See for similar files: <http://www.ps.bam.de/CE78/>
Technical information: <http://www.ps.bam.de/9241>

Version 2.0, io=3.3, CIE LAB, 1.0 exp


BAM registration: 20040101-CE78/10L/L78E60SP.PS/.PDF BAM material: code=rh4ta
Application for achromatic display output with CIE LAB contrast range $L^*:W:L^*\eta = 95.4 : 0.0$

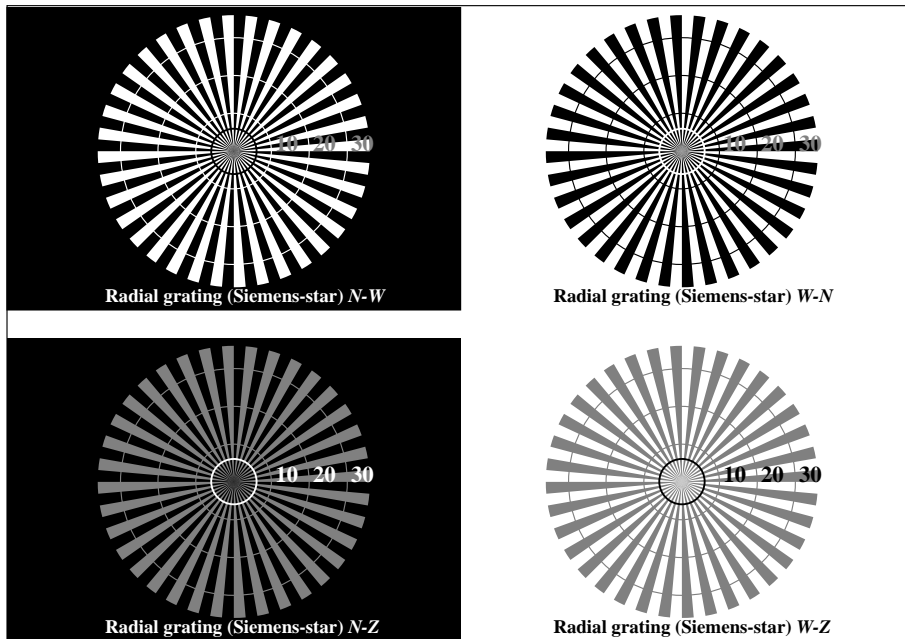

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *www* setrgbcolor*

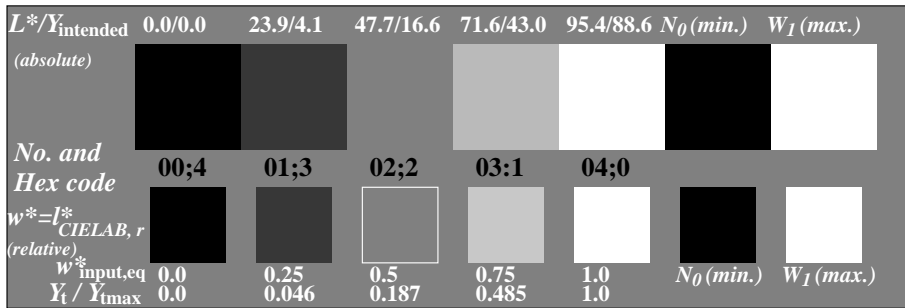

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *www* setrgbcolor*

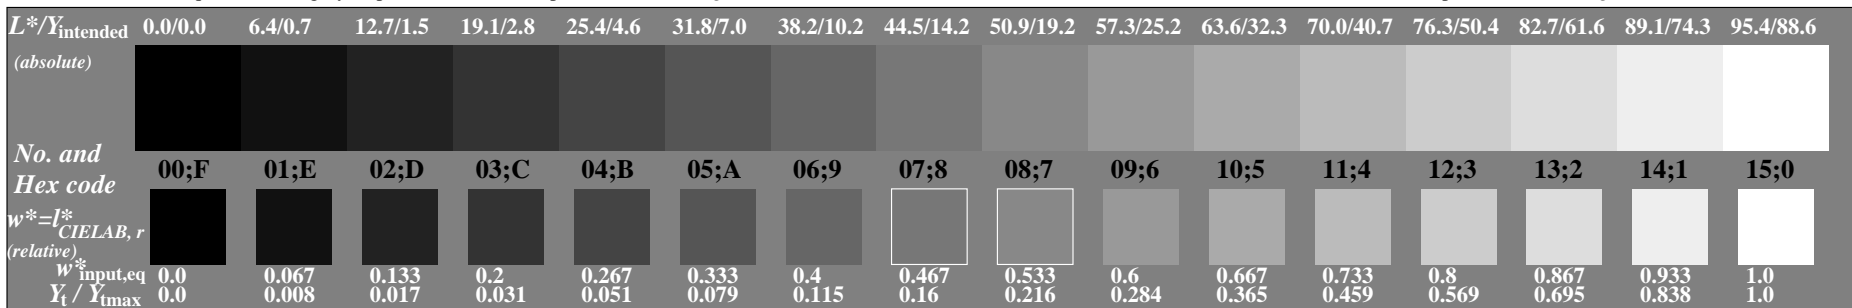


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: *www* setrgbcolor*


output: *no change compared to input*

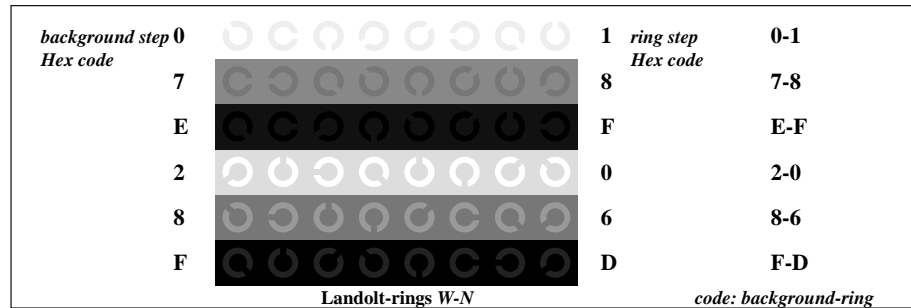


Picture C4: Landolt-rings W-N; PS operator: *www* setrgbcolor*

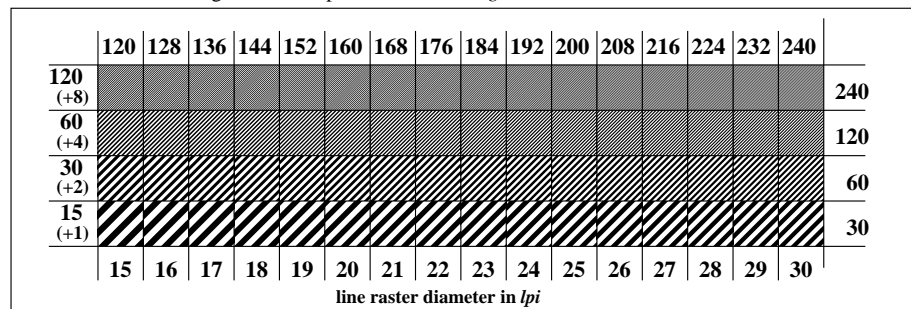


Picture C5: Line raster under 45° (or 135°); PS operator: *www* setrgbcolor*

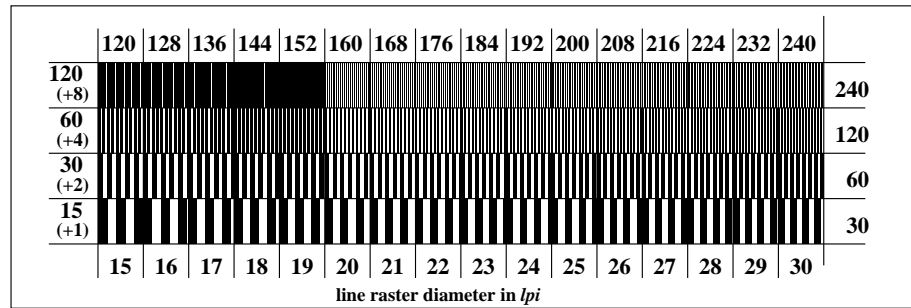


Picture C6: Line raster under 90° (or 0°); Use of the PS operator *www* setrgbcolor*

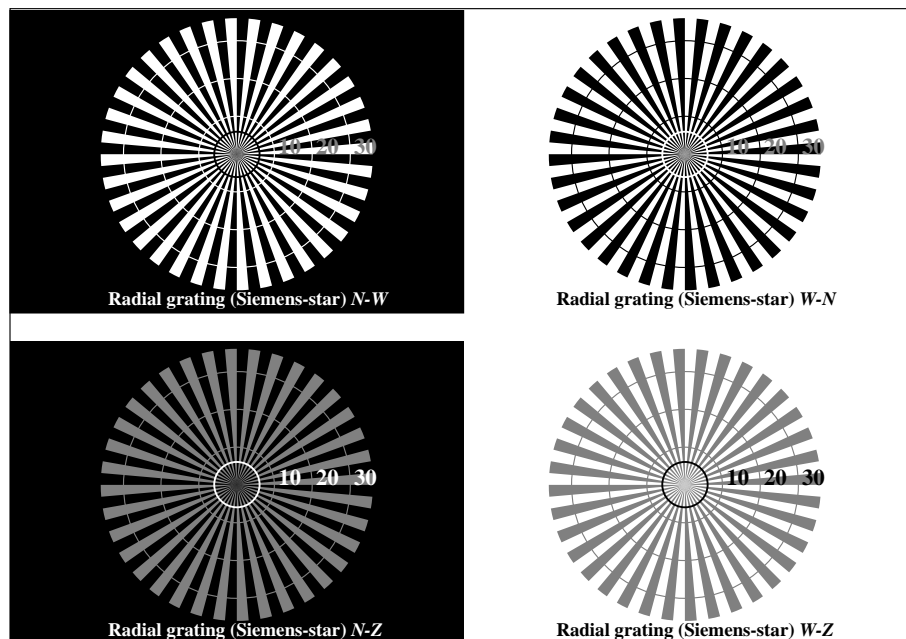

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *www* setrgbcolor*

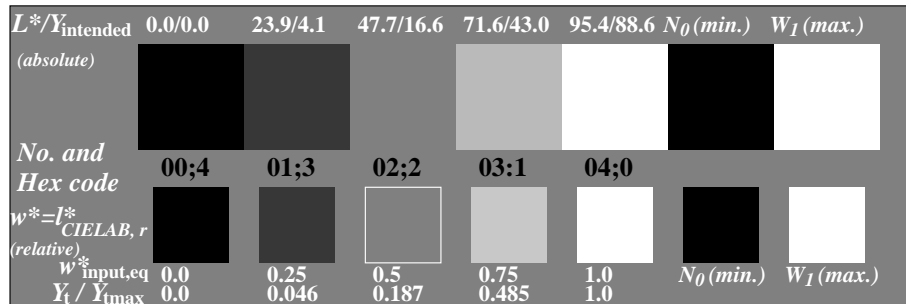

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *www* setrgbcolor*

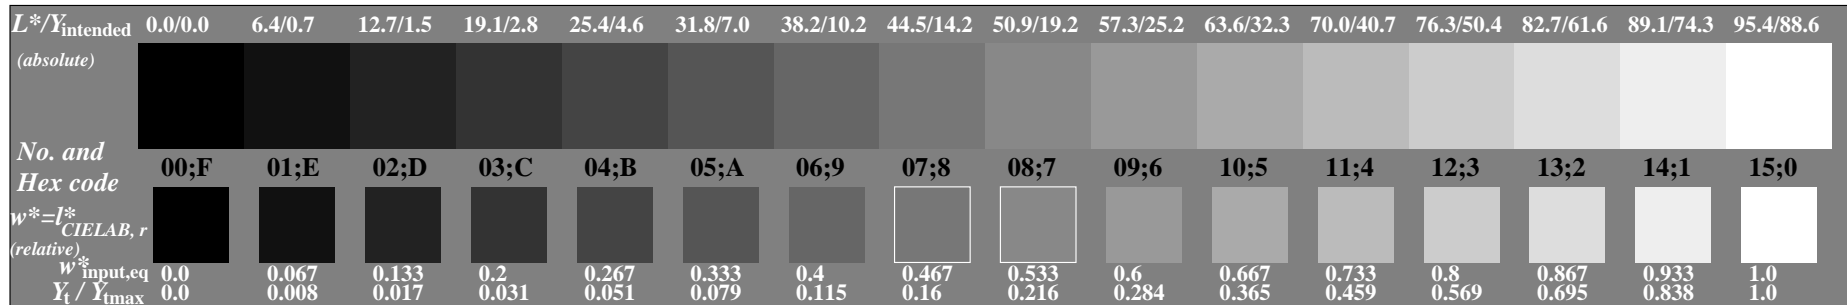


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *www* setrgbcolor*

ISO 9241-test chart for contrast range $Y_w:Y_n = 88.6 : 0.0$


Ergonomics – Visual Displays – Field Assessment Methods

input: *www* setrgbcolor*


output: *no change compared to input*

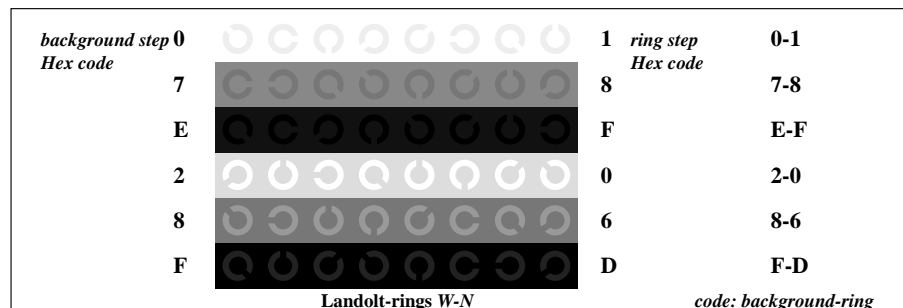

Picture C4: Landolt-rings W-N; PS operator: *www* setrgbcolor*

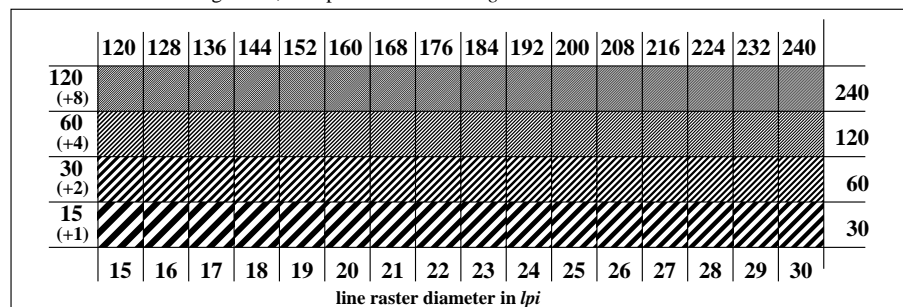

Picture C5: Line raster under 45° (or 135°); PS operator: *www* setrgbcolor*

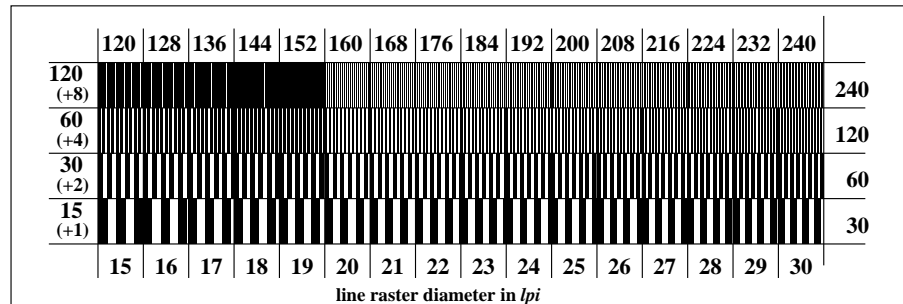

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *www* setrgbcolor*