


DEFGHIJKLMNOPQRSTUVWXYZ0123456789 ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789

Stephen J.Singel
Labanda Sinpat Abarress
Tendar,BSF
URANGLE



LSB
Funtres Solber Netener

26 March 2002



Jonathan Q.Maderia

Inpert Mampem Abaress
2343 Stantin Dawer Lank
Benhibe,SDF

Mr.Maderia:

Nam liber tempor cum soluta nobis eleifend option cogue nihil consequat, velillum. Dolore eu zril feugiat nulla facilisis at vero eros accumsan et iustó odio dignissim qui blandit praesent lutatum ril lobortis nisl ut aliquip exea commodo consequat. Duis autem vel eum iriure dolor in hendreritin vulputate velit esse molestie tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim vêniam, quis nostrud exerci tation ullamcorper suscipit lotis nisl ut aliquip ex ea commodo con-sequat. Lorem ipsum dolor sit.

Amet,consectetuer adipiscing elit, sêd diam nonummy nibh veniam, recneps adipiscing elit, sed diam nonummy nibtil laoreet dolore magmana aliam erat volutpat. Ut wisi enim minim veniam, quisient nostrud. Soluta nobis eleifend optn cogue nihil imerdiet domg id quod mzim plerat facer posim aum. Lorem ipsum dolor sit amet, consectuer. Duis autem vel eum iriure dolor in hendreritin vulputate velit esse ea commodo molestie.

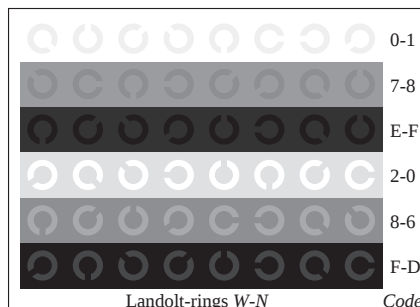



L* / Y (absolute)	18,0/2,5	23,1/3,8	28,2/5,5	33,3/7,7	38,5/10,3	43,6/13,6	48,8/17,4	54,0/21,9	59,1/27,2	64,3/33,2	69,5/40,0	74,7/47,8	79,8/56,5	85,0/66,1	90,2/76,8	95,4/88,6
No. and Hex code	00,F	01,E	02,D	03,C	04,B	05,A	06,9	07,8	08,7	09,6	10,5	11,4	12,3	13,2	14,1	15,0
I* CIE LAB,r (relative) w*	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

Stephen J.Singel
Demperta Aminerimum
Labanda Sinpat Abarress

SJS:dwg


170 mm +/- 1%

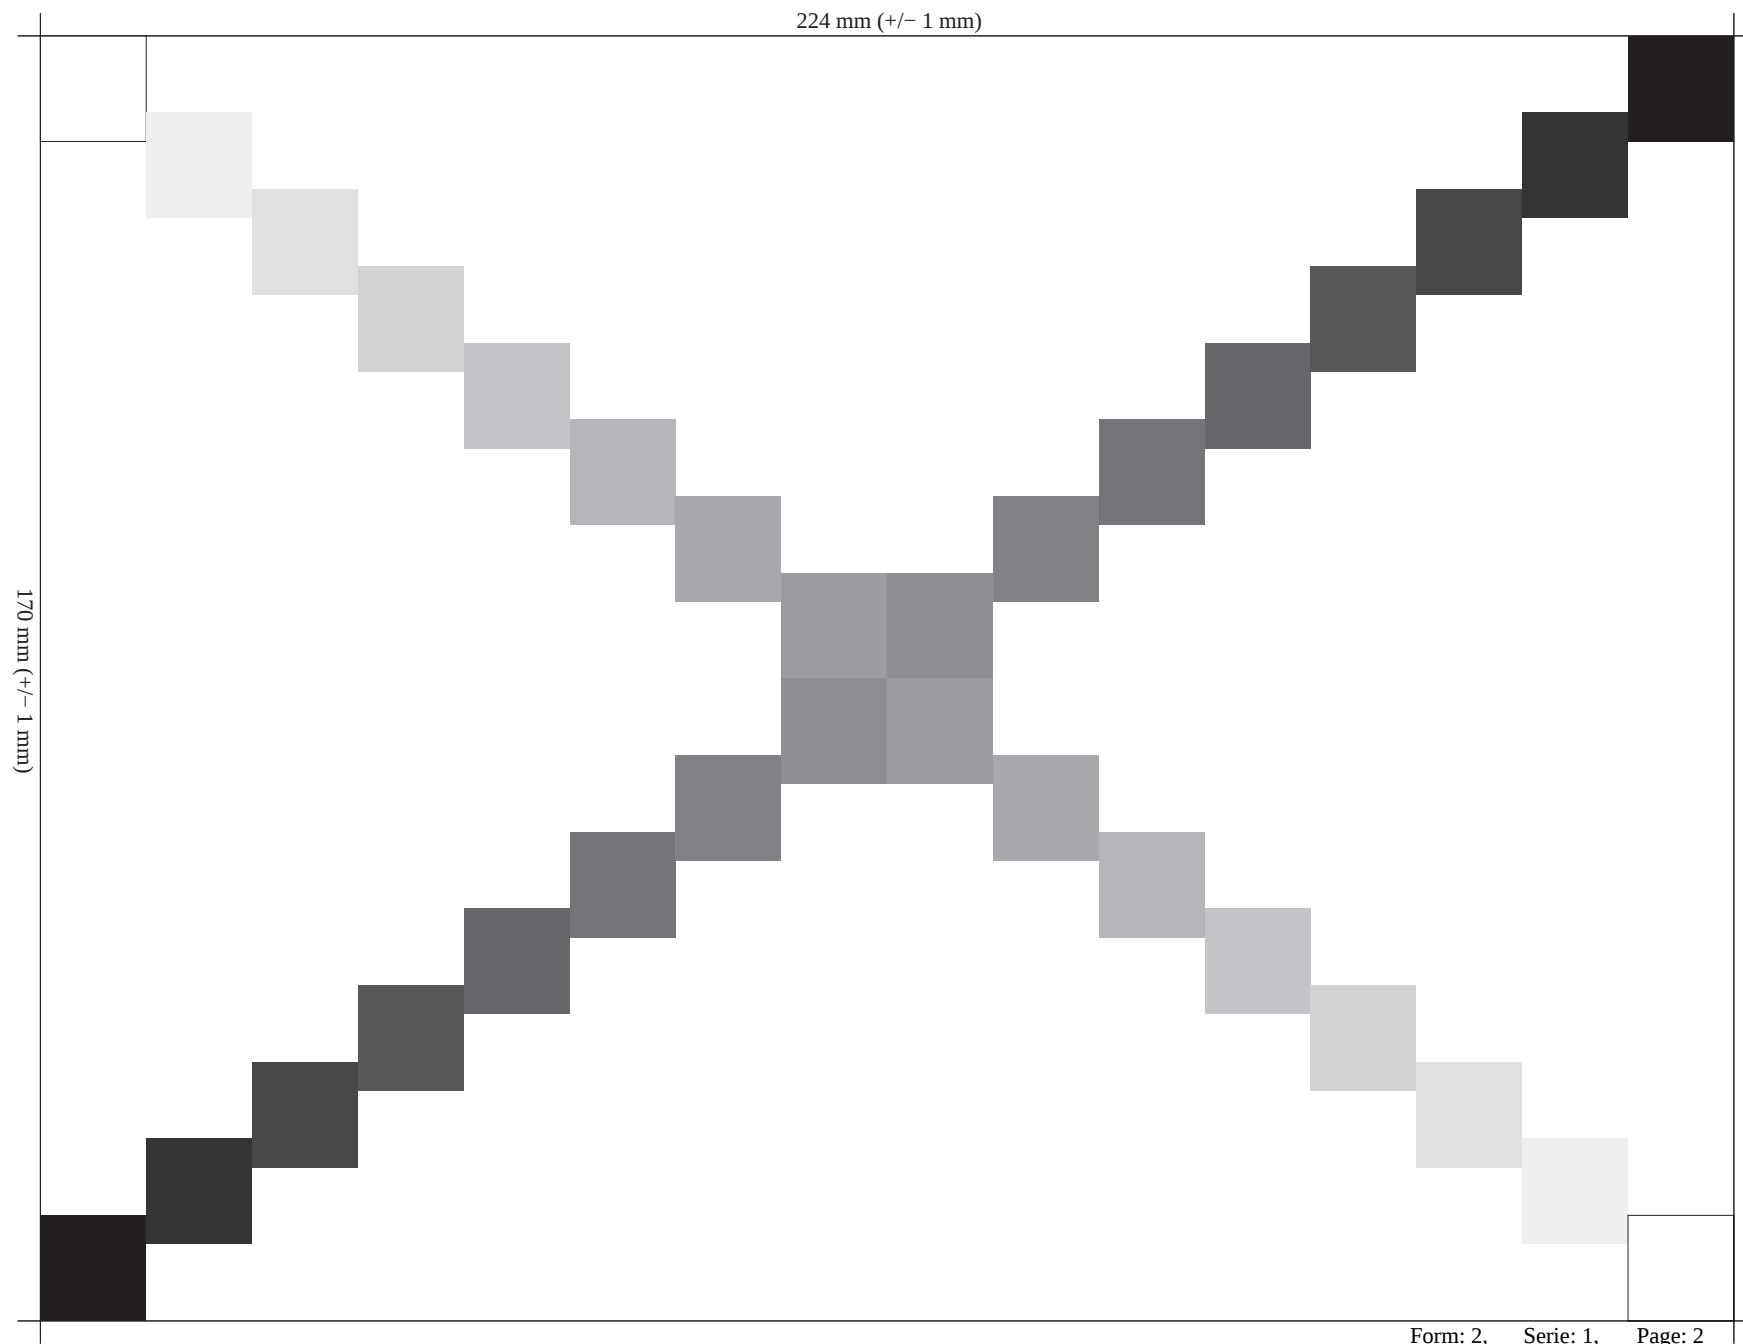

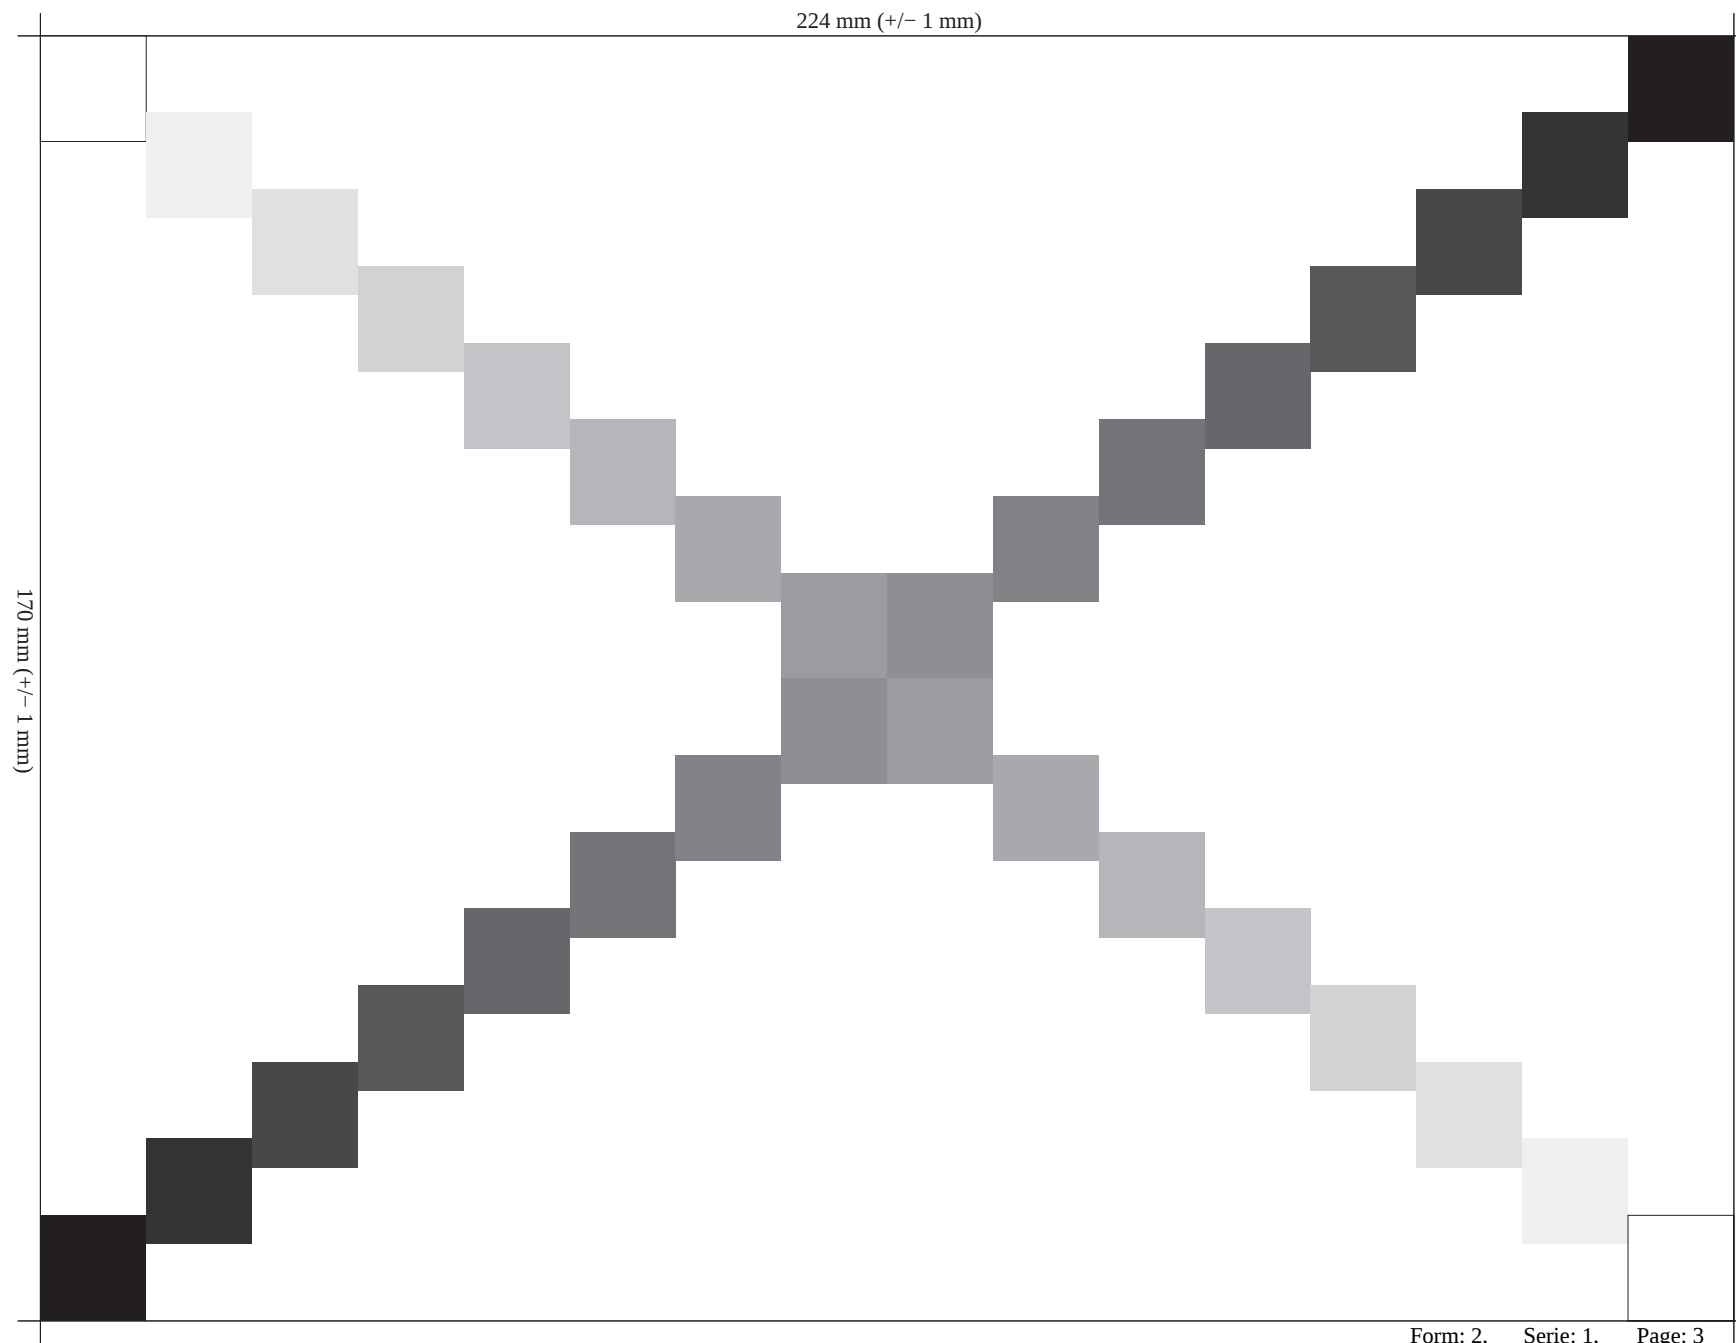


See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0.0


BAM registration: 20030501-CE95/10L/F95E02NP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

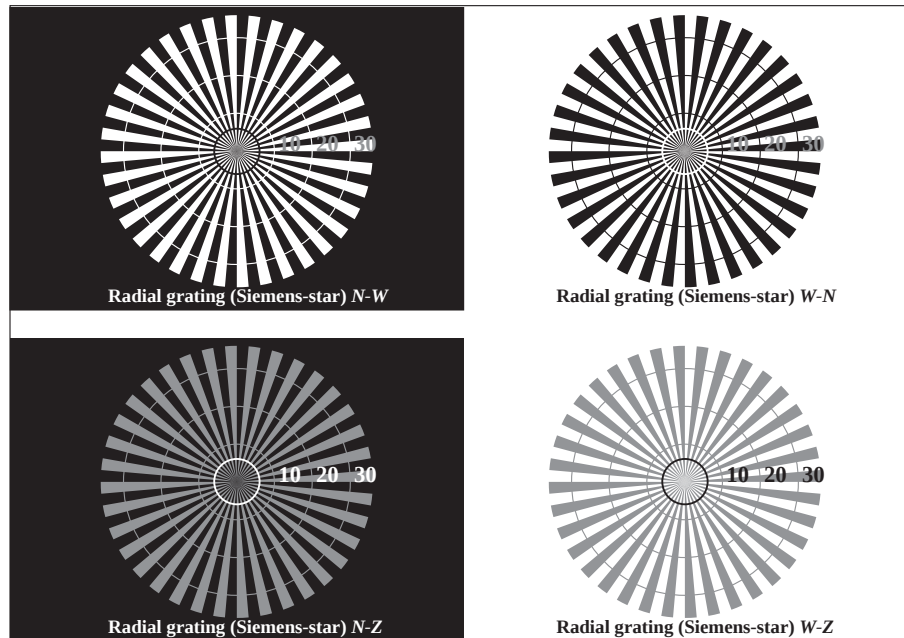


Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

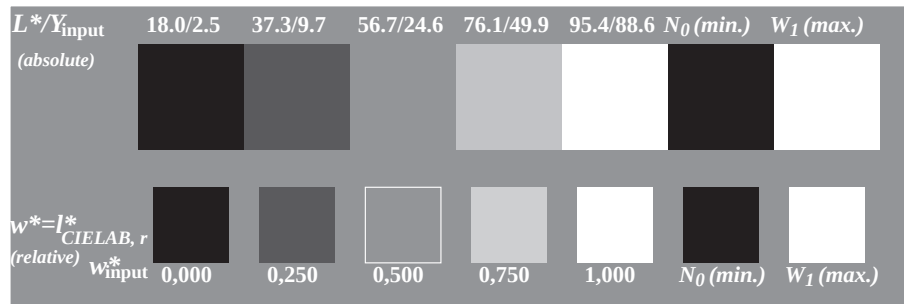


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: 000n* setcmykcolor

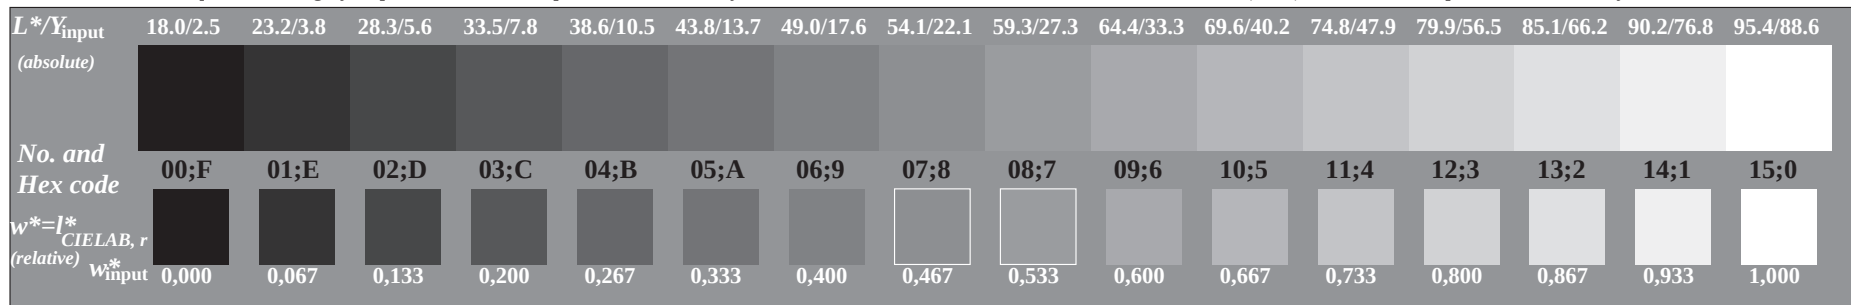


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n* setcmykcolor

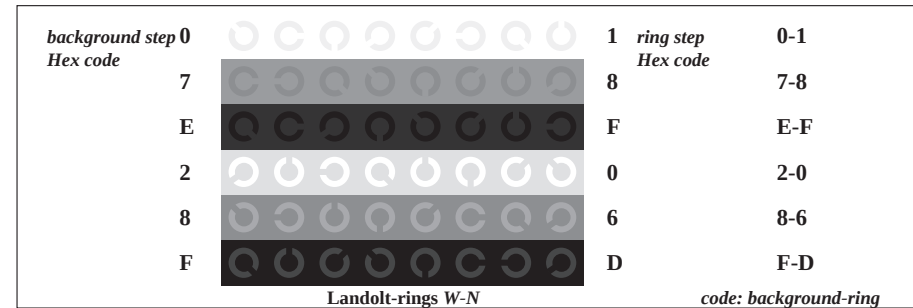

Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

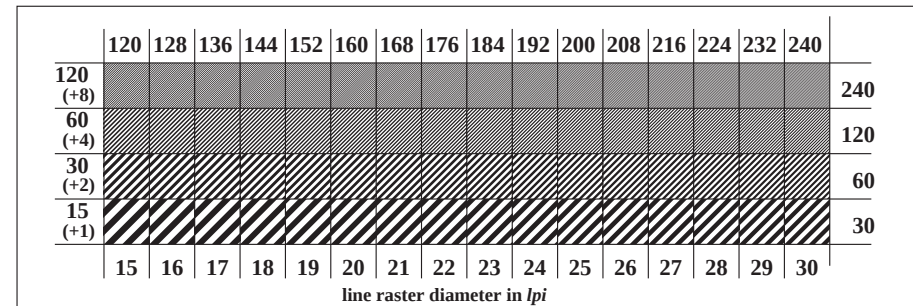


Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

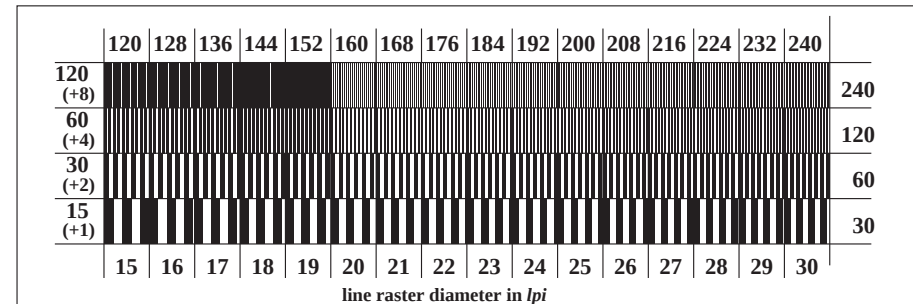

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor

See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0

BAM registration: 20030501-CE95/10L/F95E03NP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

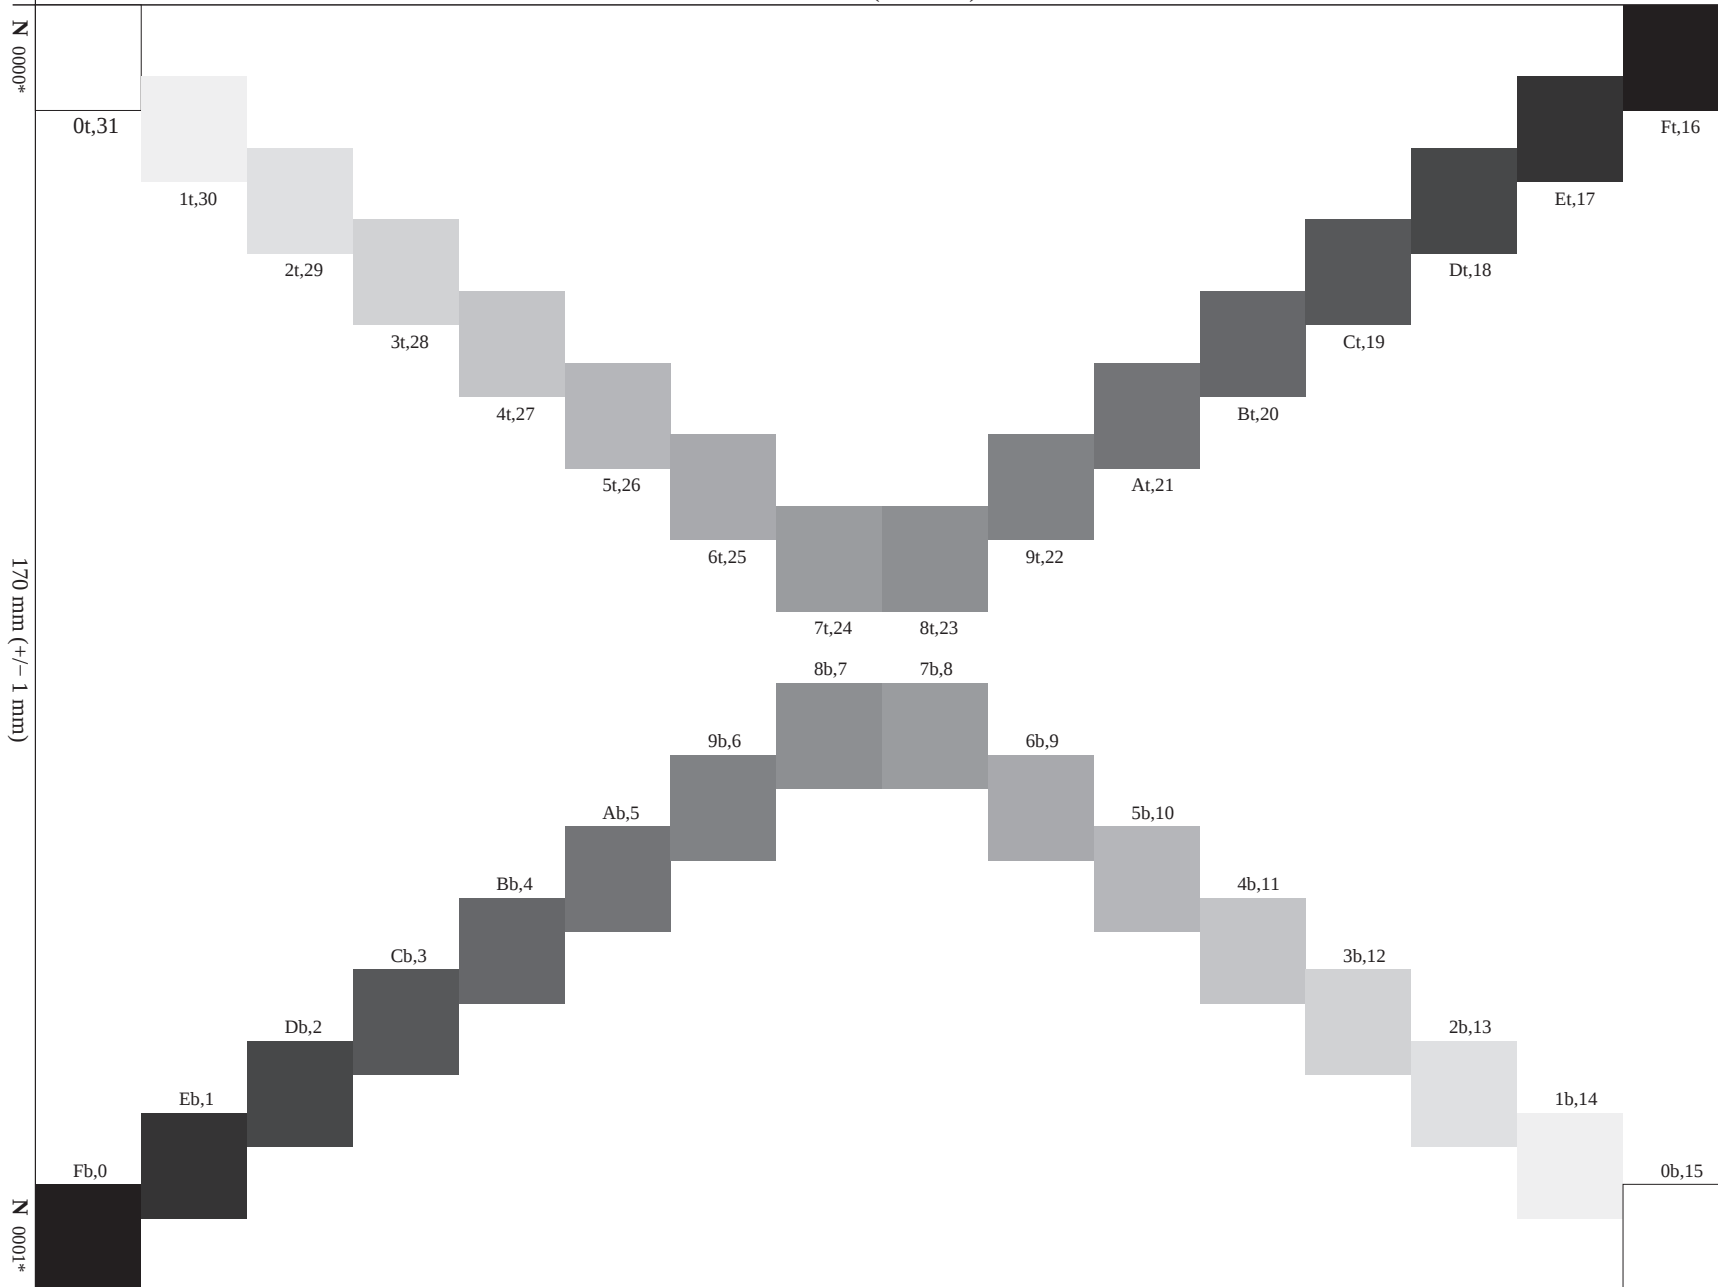

Form 4: Grey areas 14 mm x 14 mm for yield or emission: 10% geometrical and 5% visual area coverage; PS operator used: 000n* setcmykcolor

Form: 4, Serie: 1, Page: 5

ISO/IEC 19752-test chart, form 4
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: no change compared to input

www.ps.bam.de/CE95/10L/F95E04NP.PS/.PDF; start output

N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

224 mm (+/- 1 mm)

ISO/IEC 19752-test chart, form 5

Proposal by DIN NI28

2003-05-01, name1

input: 000n* setcmykcolor

Test device type: name2 output: *no change compared to input*

Form: 5,

Serie: 1,

Page: 6

Form 5: Black areas 14 mm x 7 mm for yield or emission: 5% geometrical and 5% visual area coverage; PS operator used: 000n* setcmykcolor

BAM registration: 20030501-CE95/10L/F95E04NP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0

170 mm (+/- 1 mm)

Grey Page

www.ps.bam.de/CE95/10L/F95E06NP.PS/.PDF; start output

N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

White Page

ISO/IEC 19752-test chart, form 7

Proposal by DIN NI28

2003-05-01, name1

Test device type: name2 output: *no change compared to input*

Form: 7,

Serie: 1,

Page: 8

BAM registration: 20030501-CE95/10L/F95E06NP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers


Black Page

t=top; b=bottom; l=left; r=right

BAM registration: 20030501-CE95/10L/F95E08NP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

DEF GHIJ KLMNOP QRSTUVW XYZ0123456789 ABCDEFGHIJ KLMNOP QRSTUVW XYZ0123456789 ABC

Stephen J.Singel
Labanda Sinpat Abarress
Tendar,BSF
URANGLE



LSB
Funtres Solber Netener

26 March 2002



Jonathan Q.Maderia

Inpert Mampem Abaress
2343 Stantin Dawer Lank
Benhibe,SDF

Mr.Maderia:

Nam liber tempor cum soluta nobis eleifend option cogue nihil consequat, velillum. Dolore eu zril feugiat nulla facilisis at vero eros accumsan et iustó odio dignissim qui blandit praesent lutatum ril lobortis nisl ut aliquip exea commodo consequat. Duis autem vel eum iriure dolor in hendreritin vulputate velit esse molestie tincidunt ut laoreet dolore magna aliquam erat volutpat. Ut wisi enim ad minim vêniam, quis nostrud exerci tation ullamcorper suscipit lotis nisl ut aliquip ex ea commodo con-sequat. Lorem ipsum dolor sit.

Amet,consectetuer adipiscing elit, sêd diam nonummy nibh veniam, recneps adipiscing elit, sed diam nonummy nibtil laoreet dolore magmana aliam erat volutpat. Ut wisi enim minim veniam, quisient nostrud. Soluta nobis eleifend optn cogue nihil imerdiet domg id quod mzim plerat facer posim aum. Lorem ipsum dolor sit amet, consectuer. Duis autem vel eum iriure dolor in hendreritin vulputate velit esse ea commodo molestie.

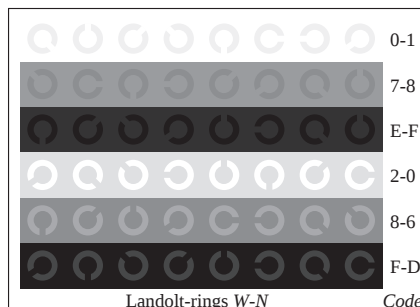



L* / Y (absolute)	18,0/2,5	23,1/3,8	28,2/5,5	33,3/7,7	38,5/10,3	43,6/13,6	48,8/17,4	54,0/21,9	59,1/27,2	64,3/33,2	69,5/40,0	74,7/47,8	79,8/56,5	85,0/66,1	90,2/76,8	95,4/88,6
No. and Hex code	00,F	01,E	02,D	03,C	04,B	05,A	06,9	07,8	08,7	09,6	10,5	11,4	12,3	13,2	14,1	15,0
I* _{CIE LAB,r} (relative) w*	0,000	0,067	0,133	0,200	0,267	0,333	0,400	0,467	0,533	0,600	0,667	0,733	0,800	0,867	0,933	1,000

Stephen J.Singel
Demperta Aminerimum
Labanda Sinpat Abarress

SJS:dwg


170 mm +/- 1%

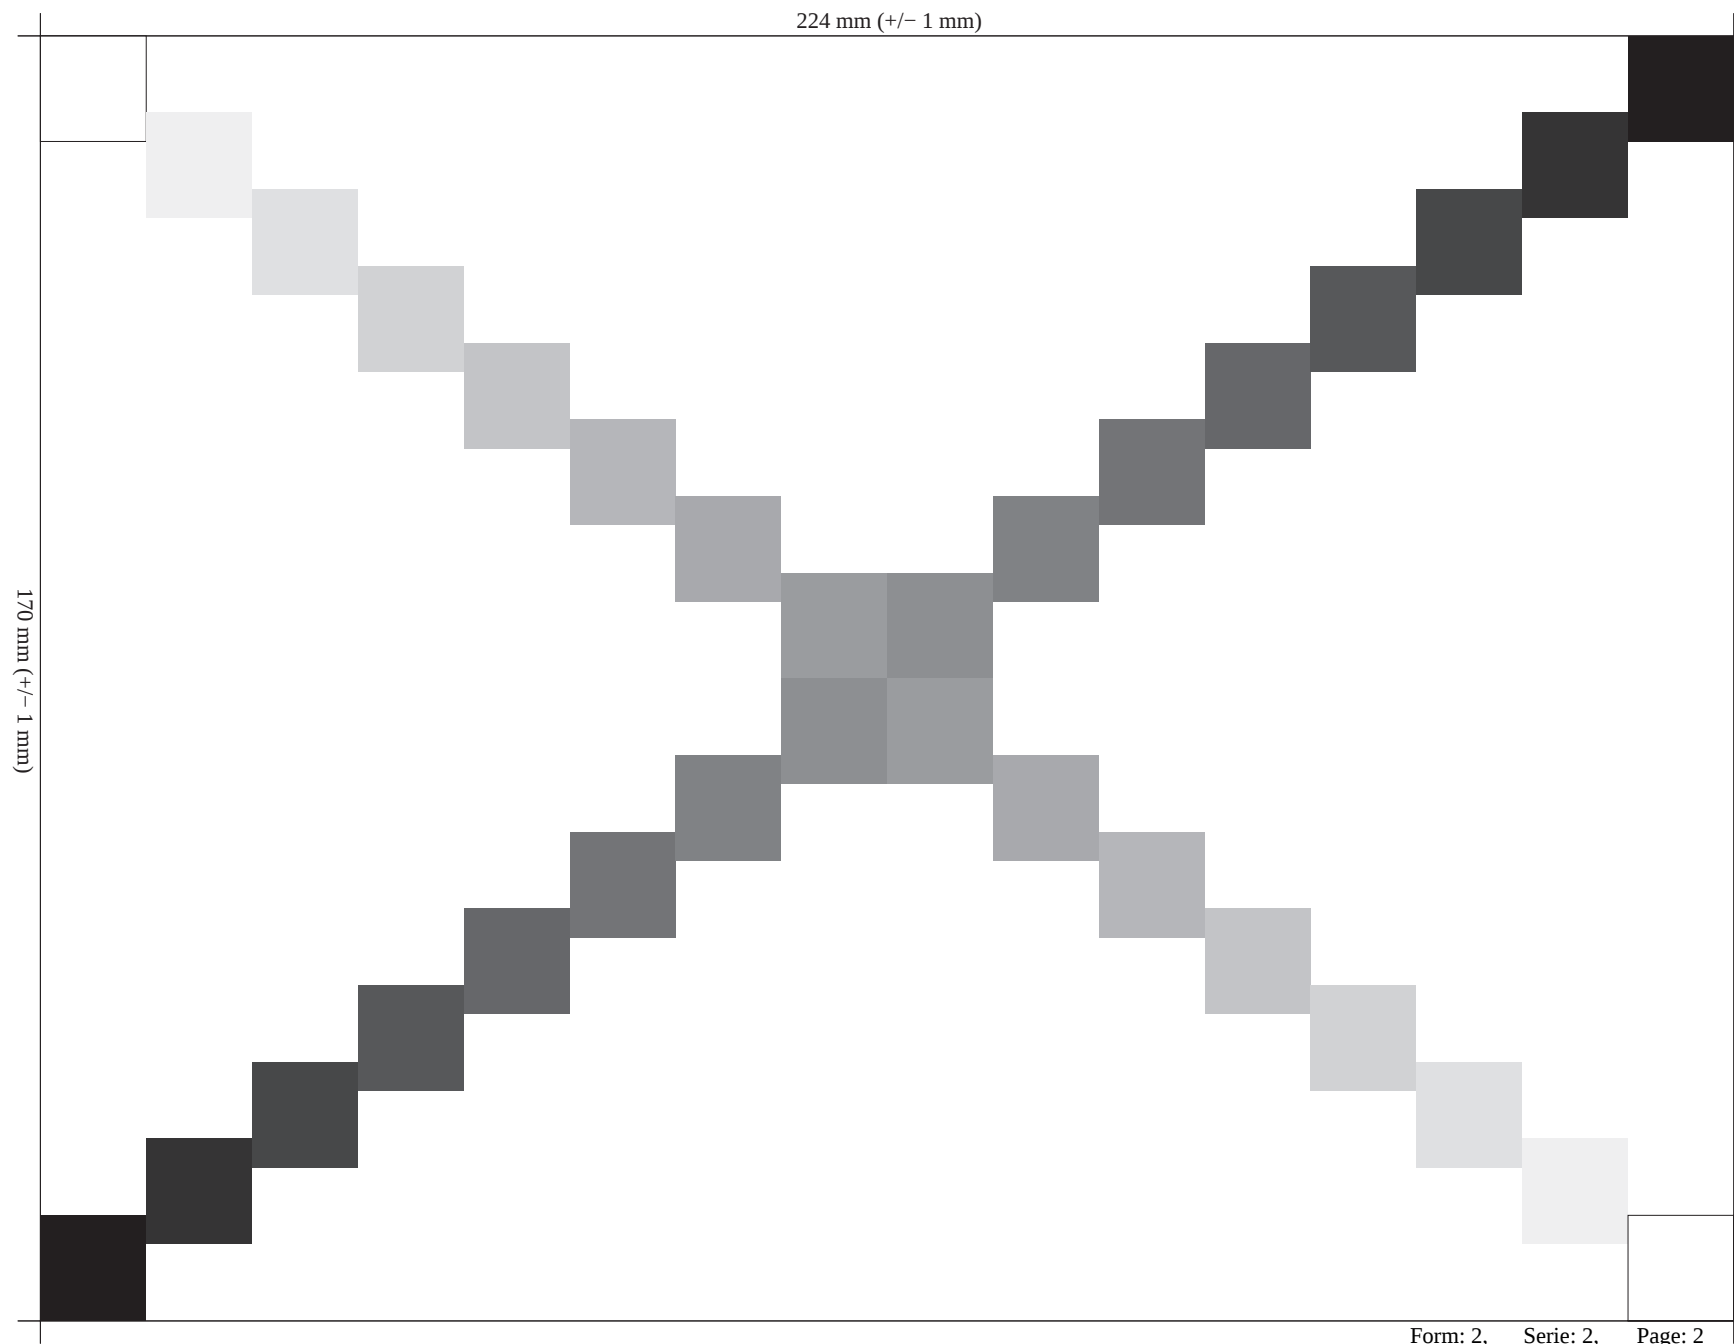

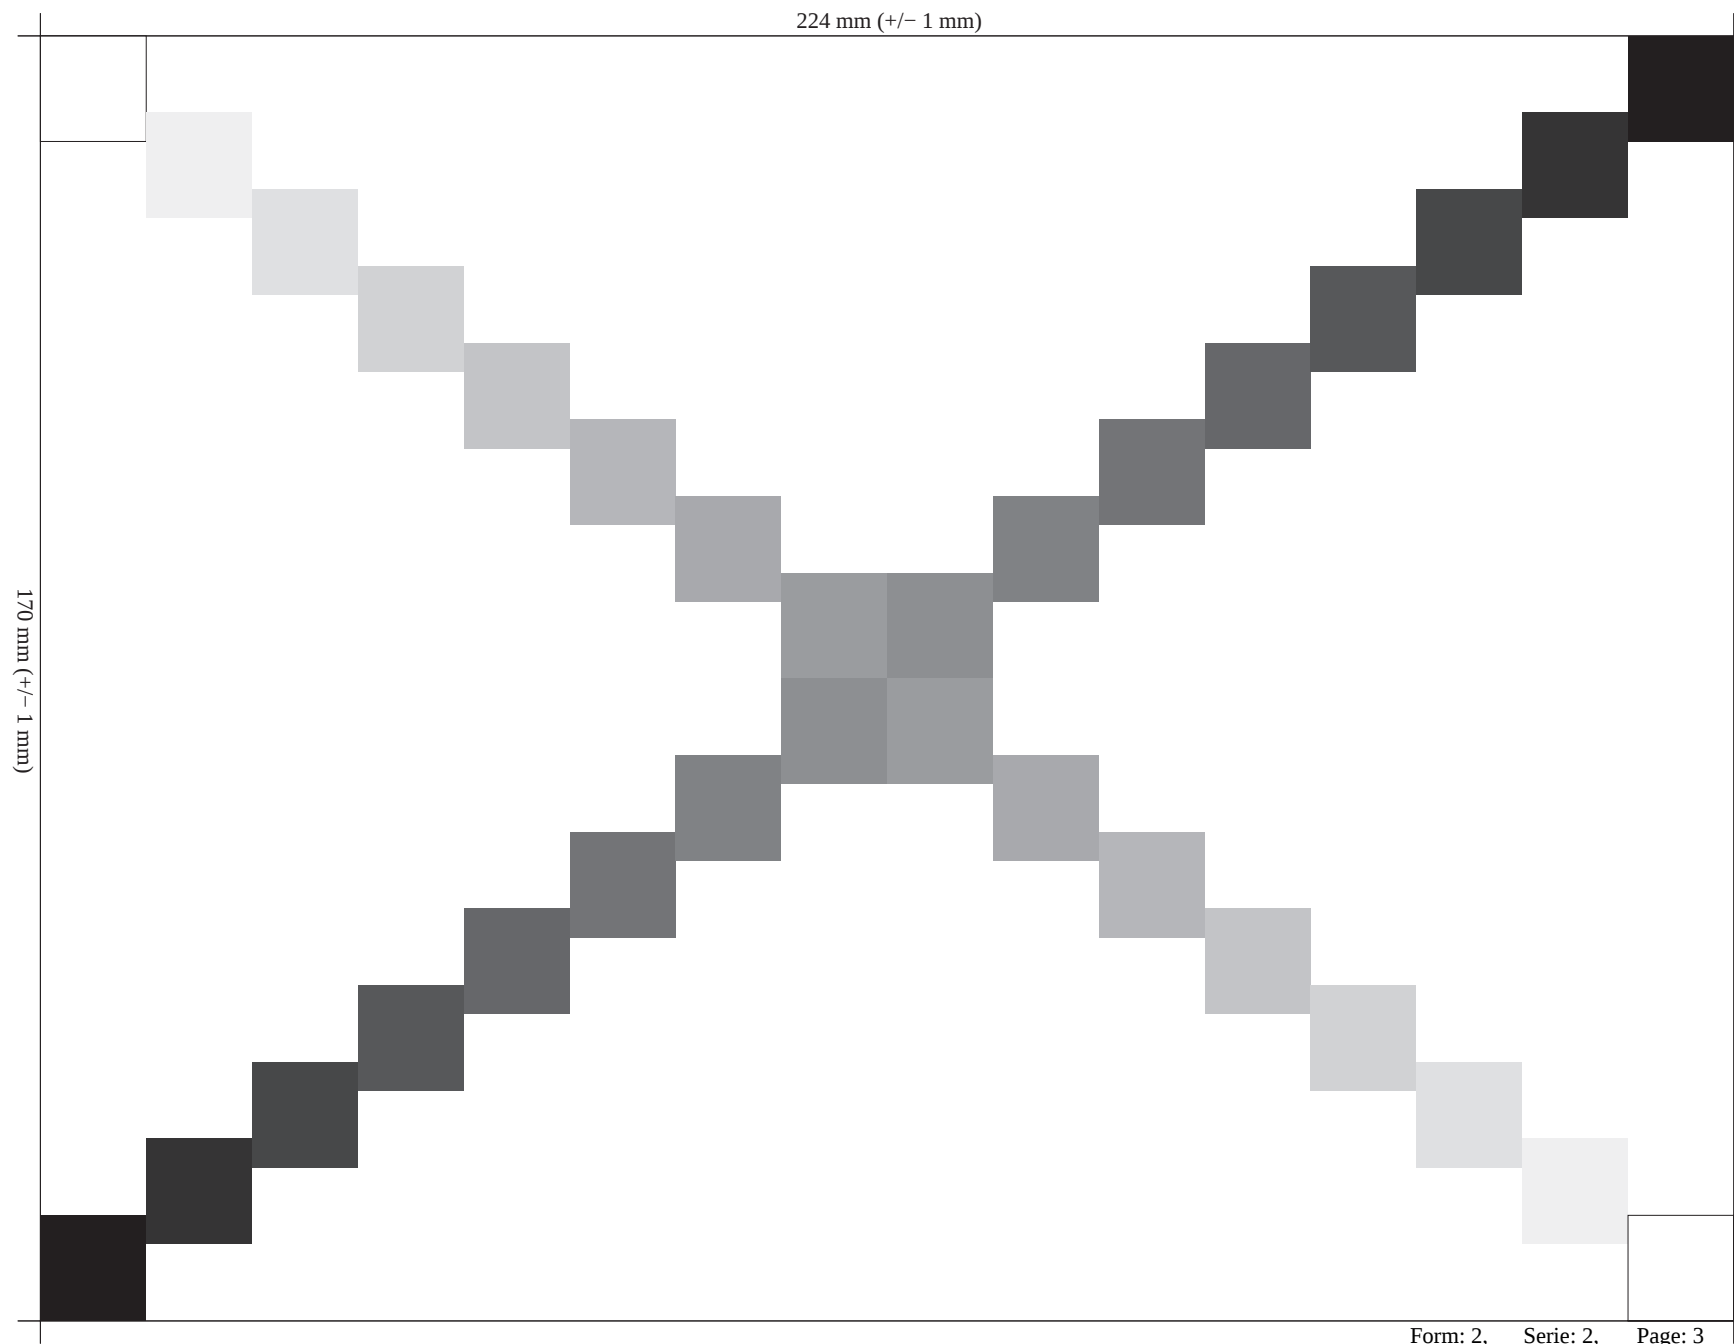


See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0.0


BAM registration: 20030501-CE95/10L/F95E02NP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

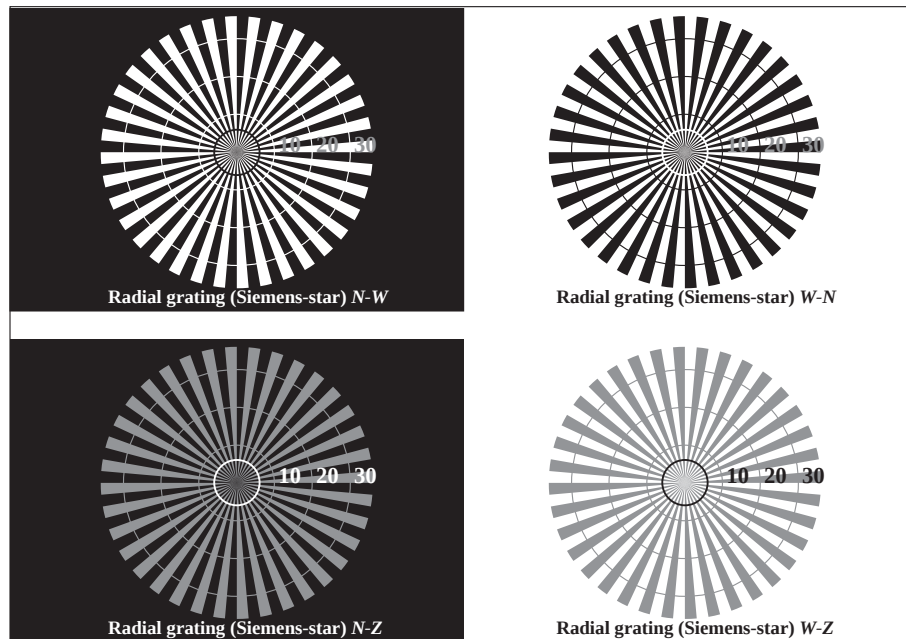

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: 000n* setcmykcolor

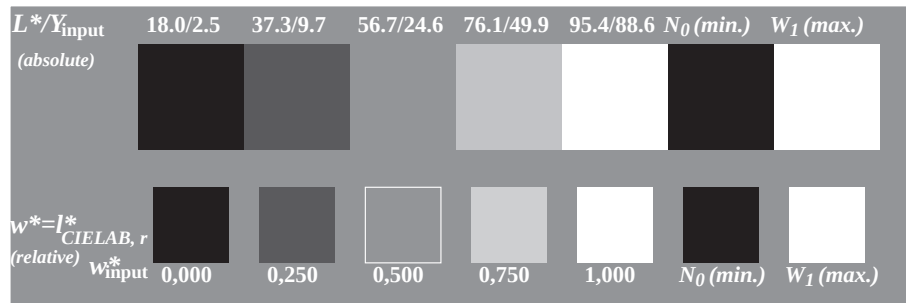

Picture C2: 5 visual equidistant L*-grey steps + N0 + W1; PS operator: 000n* setcmykcolor

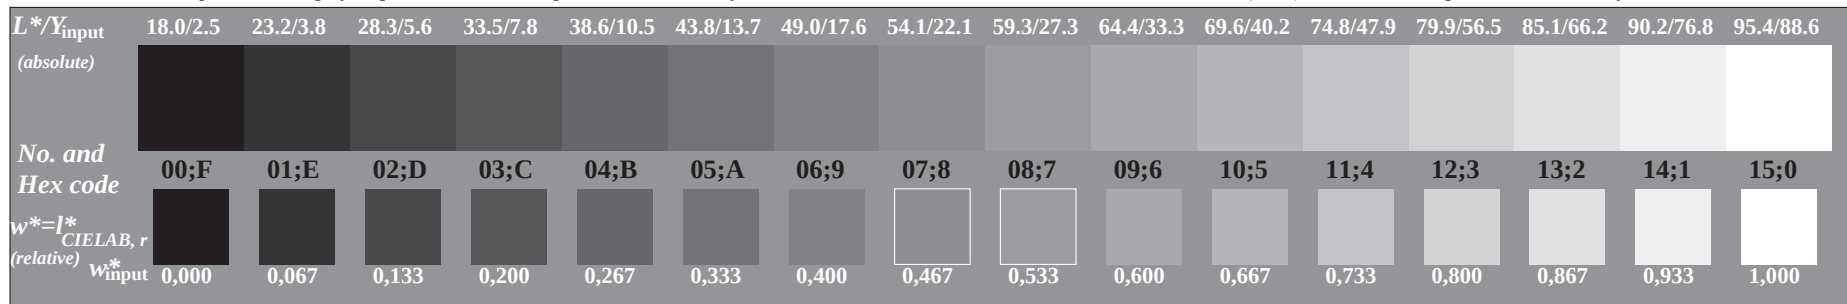


Picture C3: 16 visual equidistant L*-grey steps; PS operator: 000n* setcmykcolor


ISO/IEC 19752-test chart, form 3
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: no change compared to input


Form: 3, Serie: 2, Page: 4

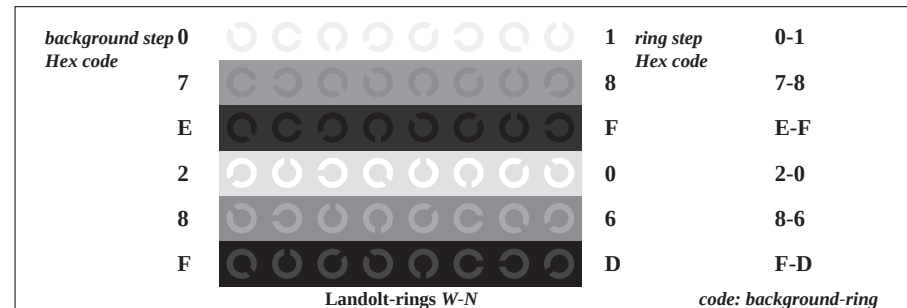

Picture C4: Landolt-rings W-N; PS operator: 000n* setcmykcolor

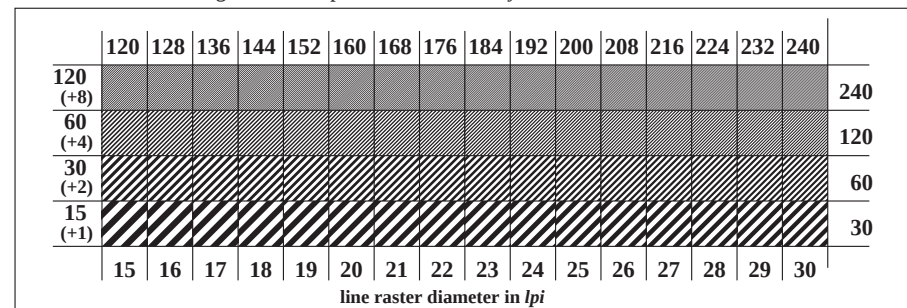

Picture C5: Line raster under 45° (or 135°); PS operator: 000n* setcmykcolor

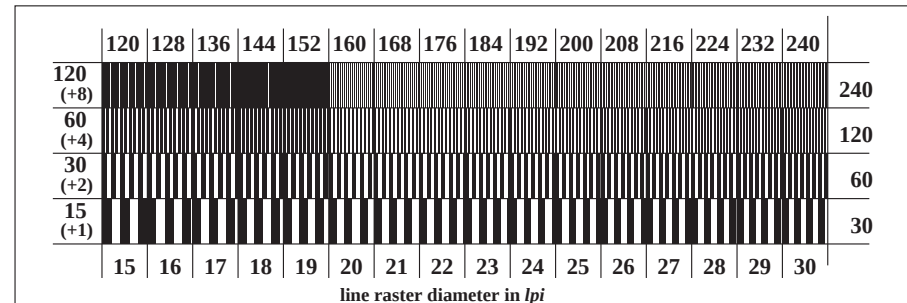

Picture C6: Line raster under 90° (or 0°); Use of the PS operator 000n* setcmykcolor

N

0t,31

1t,30

2t,29

3t,28

4t,27

5t,26

6t,25

7t,24

8t,23

9t,22

At,21

Bt,20

Ct,19

Dt,18

Et,17

Ft,16

Fb,0

Eb,1

Db,2

Cb,3

Bb,4

Ab,5

9b,6

8b,7

7b,8

6b,9

5b,10

4b,11

3b,12

2b,13

1b,14

0b,15

N

0t,31

1t,30

2t,29

3t,28

4t,27

5t,26

6t,25

7t,24

8t,23

9t,22

At,21

Bt,20

Ct,19

Dt,18

Et,17

Ft,16

Fb,0

Eb,1

Db,2

Cb,3

Bb,4

Ab,5

9b,6

8b,7

7b,8

6b,9

5b,10

4b,11

3b,12

2b,13

1b,14

0b,15

www.ps.bam.de/CE95/10L/F95E04NP.PS/.PDF; start output

N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

224 mm (+/- 1 mm)

ISO/IEC 19752-test chart, form 5

Proposal by DIN NI28

2003-05-01, name1

input: 000n* setcmykcolor

Test device type: name2 output: *no change compared to input*

Form: 5,

Serie: 2,

Page: 6

Form 5: Black areas 14 mm x 7 mm for yield or emission: 5% geometrical and 5% visual area coverage; PS operator used: 000n* setcmykcolor

BAM registration: 20030501-CE95/10L/F95E04NP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0

170 mm (+/- 1 mm)

Grey Page

www.ps.bam.de/CE95/10L/F95E06NP.PS/.PDF; start output

N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

ISO/IEC 19752-test chart, form 7
Proposal by DIN NI28

2003-05-01, name1

input: 000n* setcmykcolor

Test device type: name2 output: *no change compared to input*

Form: 7,

Serie: 2,

Page: 8

White Page


BAM registration: 20030501-CE95/10L/F95E06NP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0

Black Page

See for similar files: <http://www.ps.bam.de/CE95/CE95.HTM>
Technical information: <http://www.ps.bam.de/19752> Version 2.0, io=0,0

BAM registration: 20030501-CE95/10L/F95E08NP.PS/.PDF BAM material: code=rh4ta
application for yield test of monochromatic printers

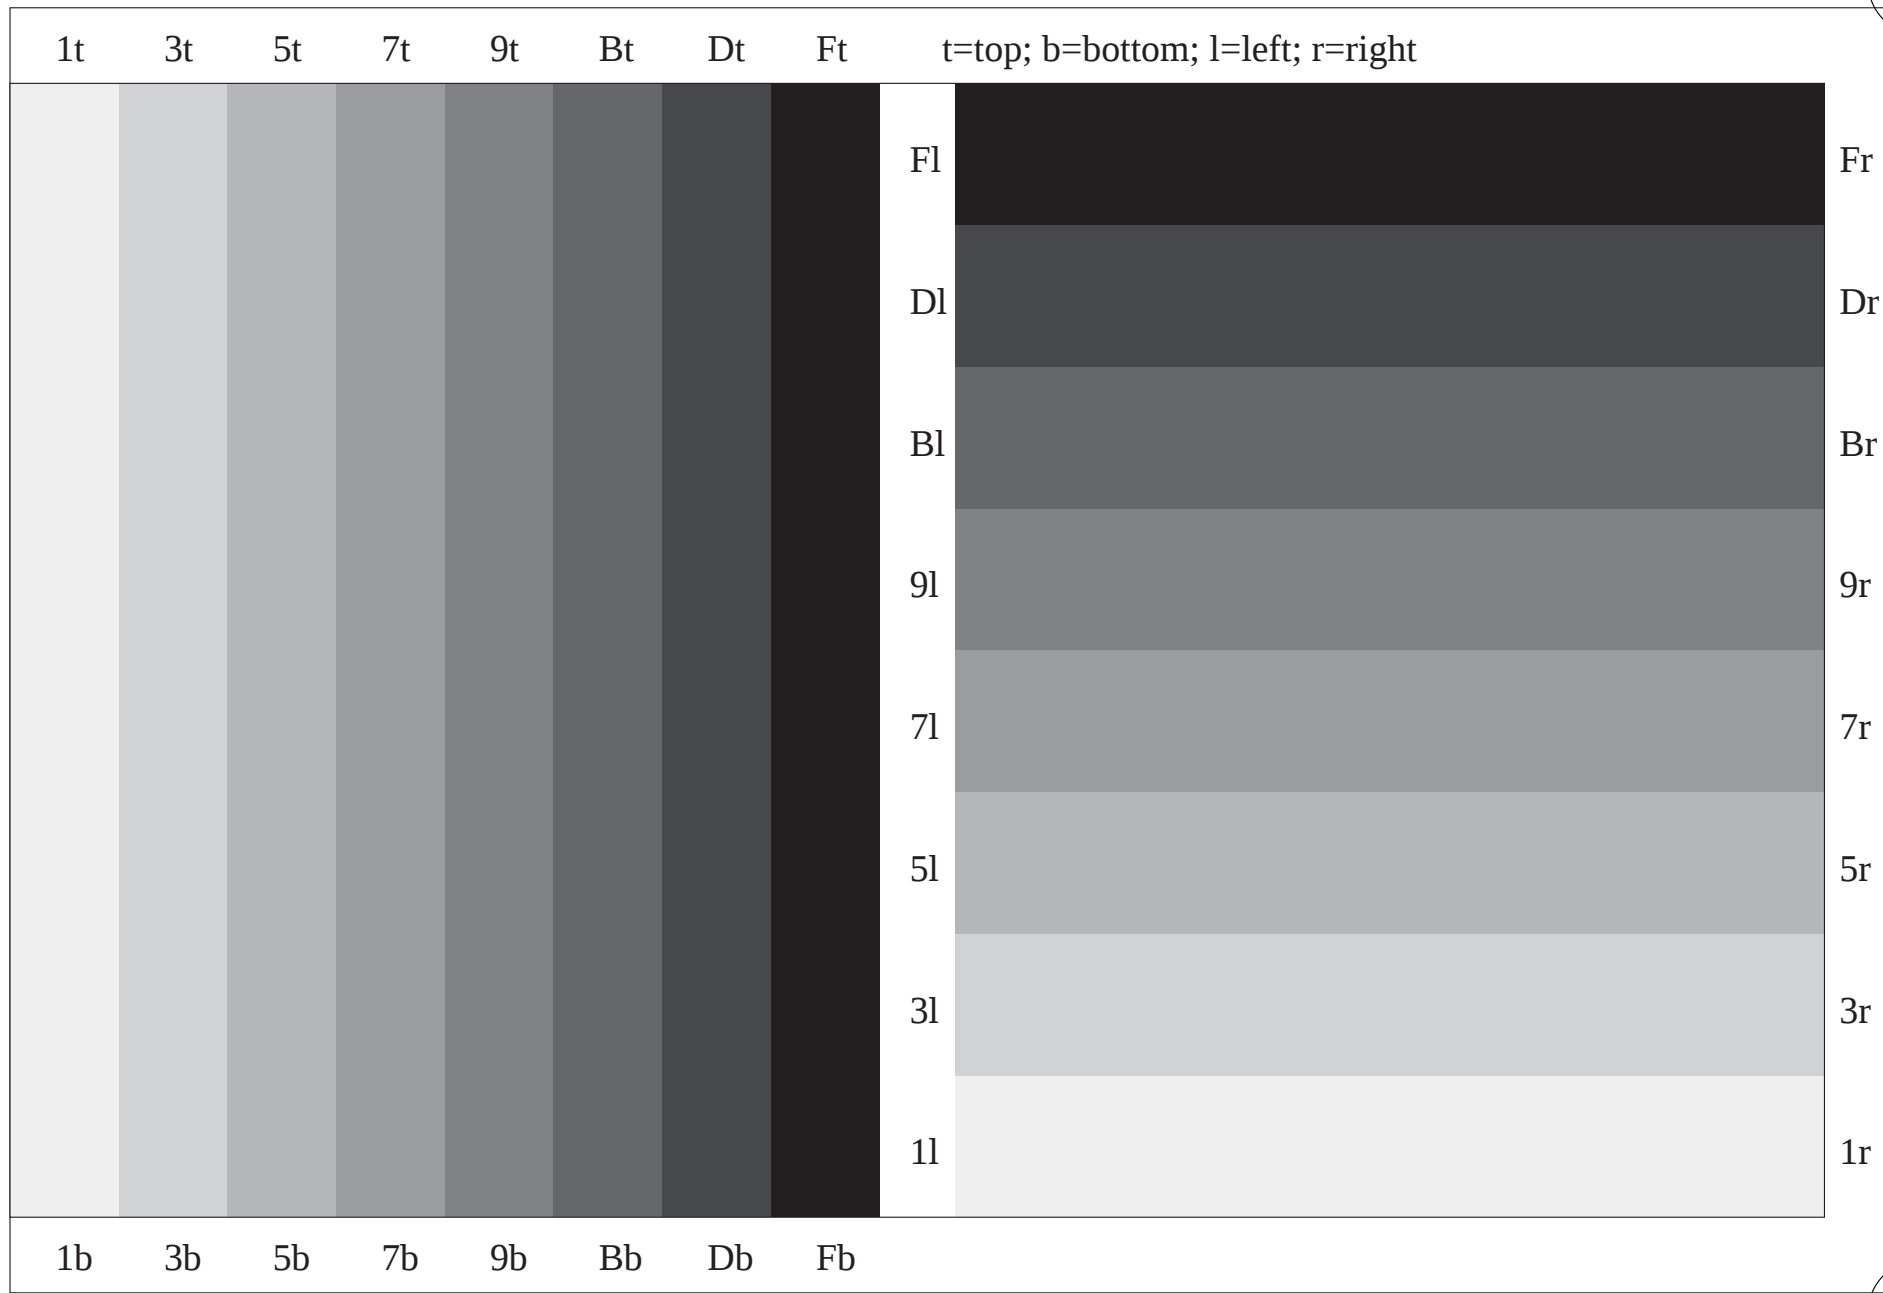

Form 9: Grey rectangles 115 mm x 14.4 mm for yield or emission; PS operator used: 000n* setcmykcolor

ISO/IEC 19752-test chart, form 9
Proposal by DIN NI28

2003-05-01, name1 input: 000n* setcmykcolor
Test device type: name2 output: no change compared to input

Form: 9, Serie: 2, Page: 10