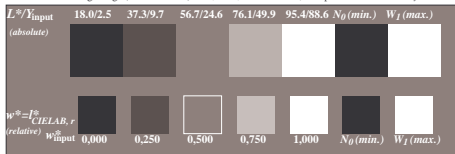
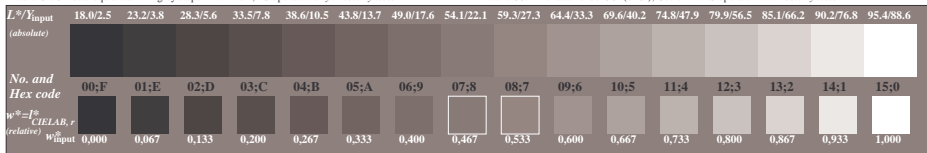
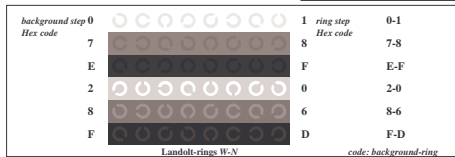
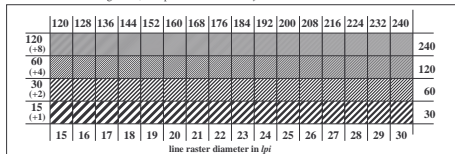
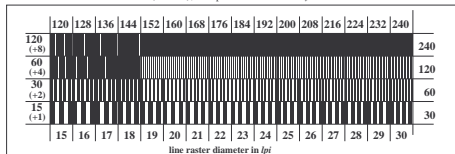
Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0\* setcmkycolor*Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; PS operator: *cm0\* setcmkycolor*Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: *nnn0\* setcmkycolor*ISO/IEC 19752-test chart, form 3  
Proposal by DIN N128

2003-05-01, name1

Test device type: name2 output: no change compared to input

Form: 3, Series: 1, Page: 1

Picture C4: Landolt-rings W-N; PS operator: *nnn0\* setcmkycolor*Picture C5: Line raster under 45° (or 135°); PS operator: *nnn0\* setcmkycolor*Picture C6: Line raster under 90° (or 0°); Use of the PS operator *nnn0\* setcmkycolor*