

Order of original standard DIN 33870:2001-01: Beuth-Verlag, D-10787 Berlin

L* : 0.0 6.6 13.3 20.0 26.6 33.3 40.0 46.6 49.9 53.3 59.9 66.6 73.3 79.9 86.6 93.3 99.9
Y : 0.0 0.7 1.6 2.9 4.9 7.6 11.2 15.7 18.4 21.3 28.1 36.1 45.6 56.6 69.3 83.7 99.9

L*NS1 : 0.0 L*WS1 : 99.9 xbox: 13.0 mm ybox: 11.0 mm yboxcor.: 11.0 mm
f : 0.22 0.22 0.22 0.22 0.21 0.21 0.2 0.19 0.18 0.17 0.16 0.14 0.12 0.09 0.07 0.03 0.0


5.27

Technical information: <http://o2.ps.bam.de>

Image file version 1.6, A10ES1A.PS/.TXT

BAM registration: 20011020-33870D10

BAM-Reference material: code=rha4ra-33870D10

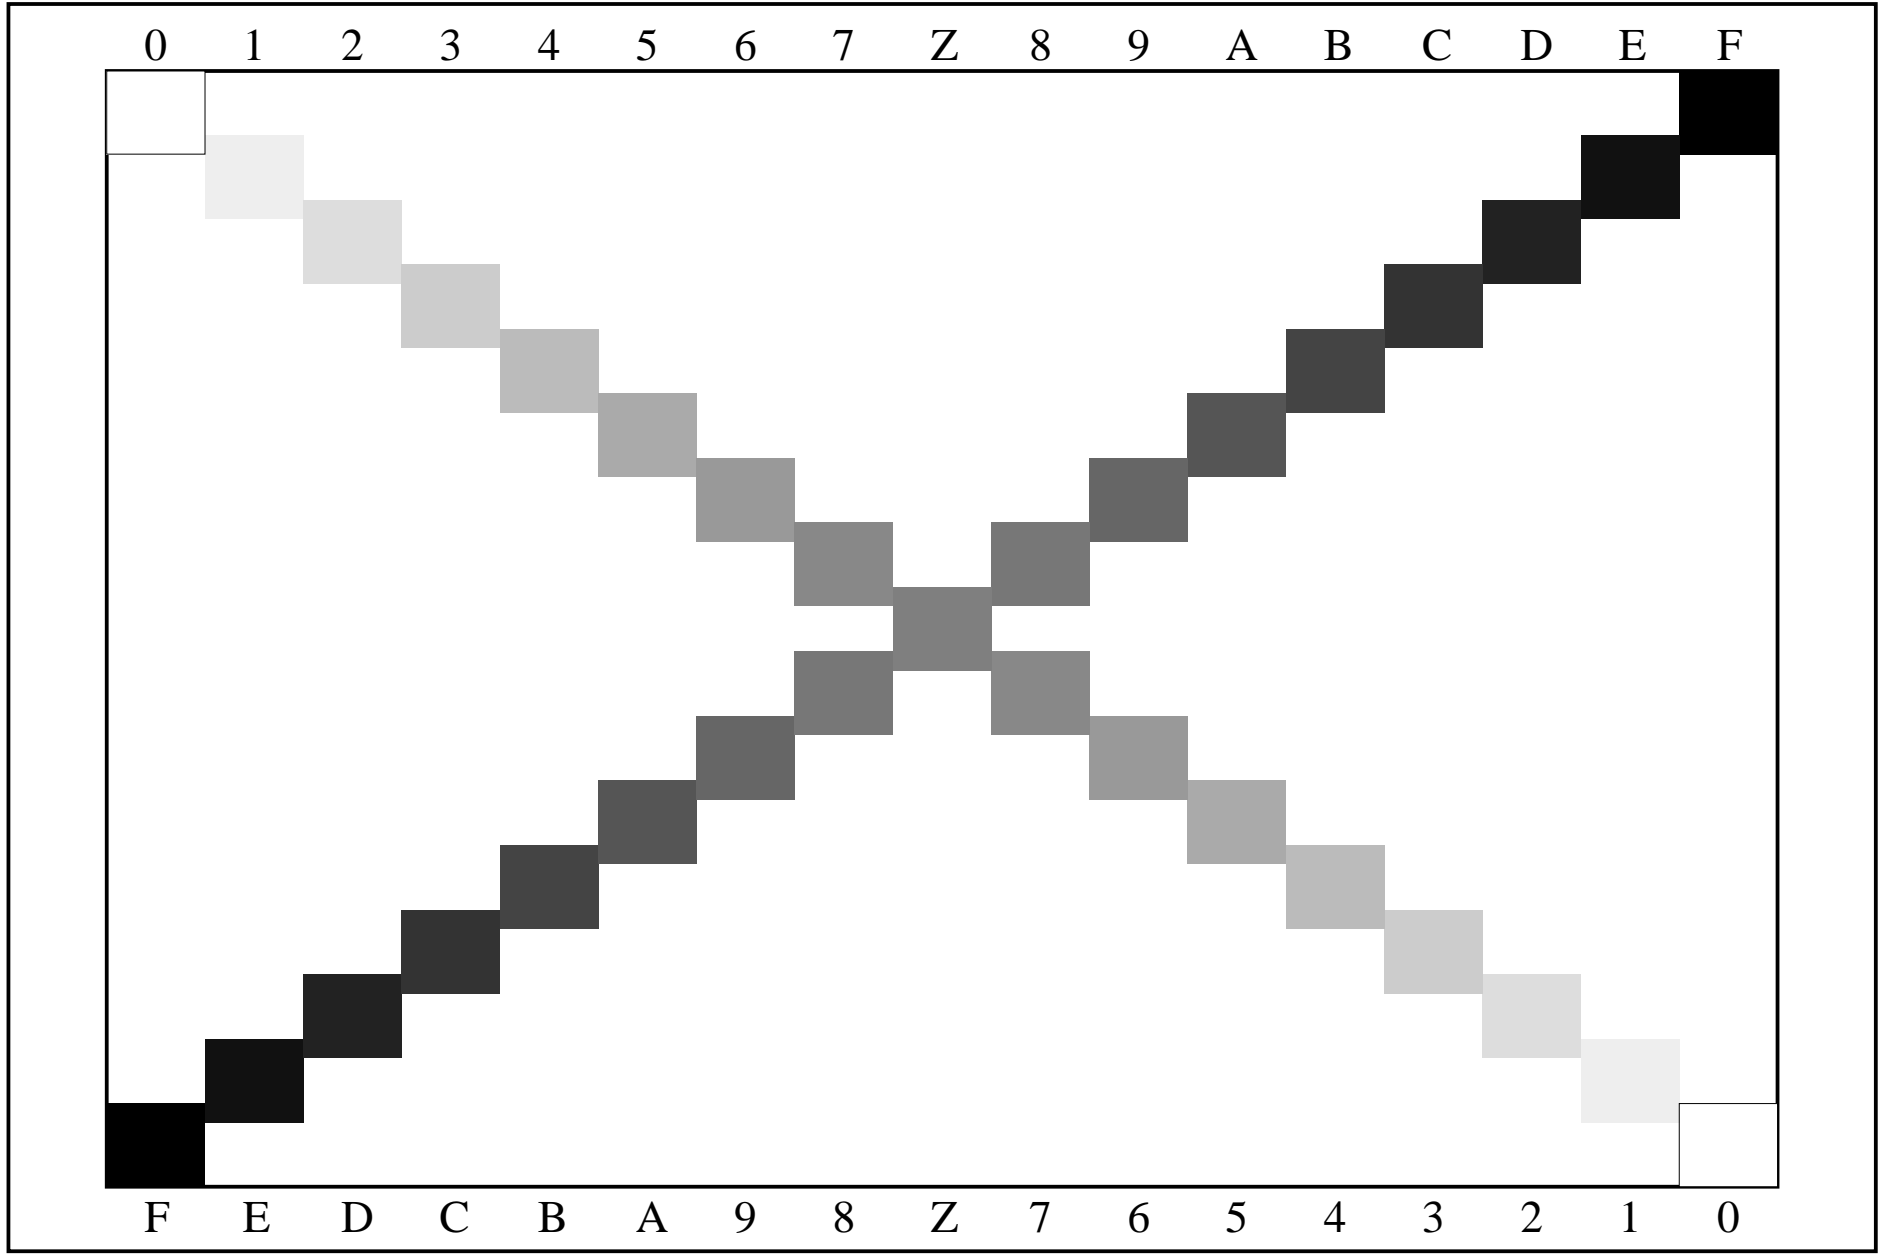

H10: 00 11 22 33 44 55 66 77 7F 88 99 AA BB CC DD EE FF

D10: 0 17 34 51 68 85 102 119 127 136 153 170 187 204 221 238 255 0 0

Test chart no. 1 according to DIN 33870: Test of refilled black toner modules

www.ps.bam.de/DE02/10A/A10ES1A.PS/.TXT