

Order of original standard DIN 33870:2001-01: Beuth-Verlag, D-10787 Berlin

L\* : 23.2 27.9 32.5 37.2 41.9 46.6 51.3 55.9 58.3 60.6 65.3 70.0 74.7 79.3 84.0 88.7 93.4  
Y : 3.8 5.4 7.3 9.6 12.4 15.7 19.5 23.9 26.3 28.8 34.4 40.7 47.8 55.5 64.1 73.6 83.9

L\*NS1 : 23.2 L\*WS1 : 93.4 xbox: 13.0 mm ybox: 11.0 mm yboxcor.: 11.41 mm  
f : 0.22 0.22 0.21 0.21 0.2 0.19 0.18 0.17 0.16 0.15 0.14 0.12 0.1 0.08 0.05 0.02 0.0


4.82-> 5.00

Technical information: <http://o2.ps.bam.de>

Image file version 1.6, A10ES2A.PS/.TXT

BAM registration: 20011020-33870D10

BAM-Reference material: code=rh4ra-33870D10

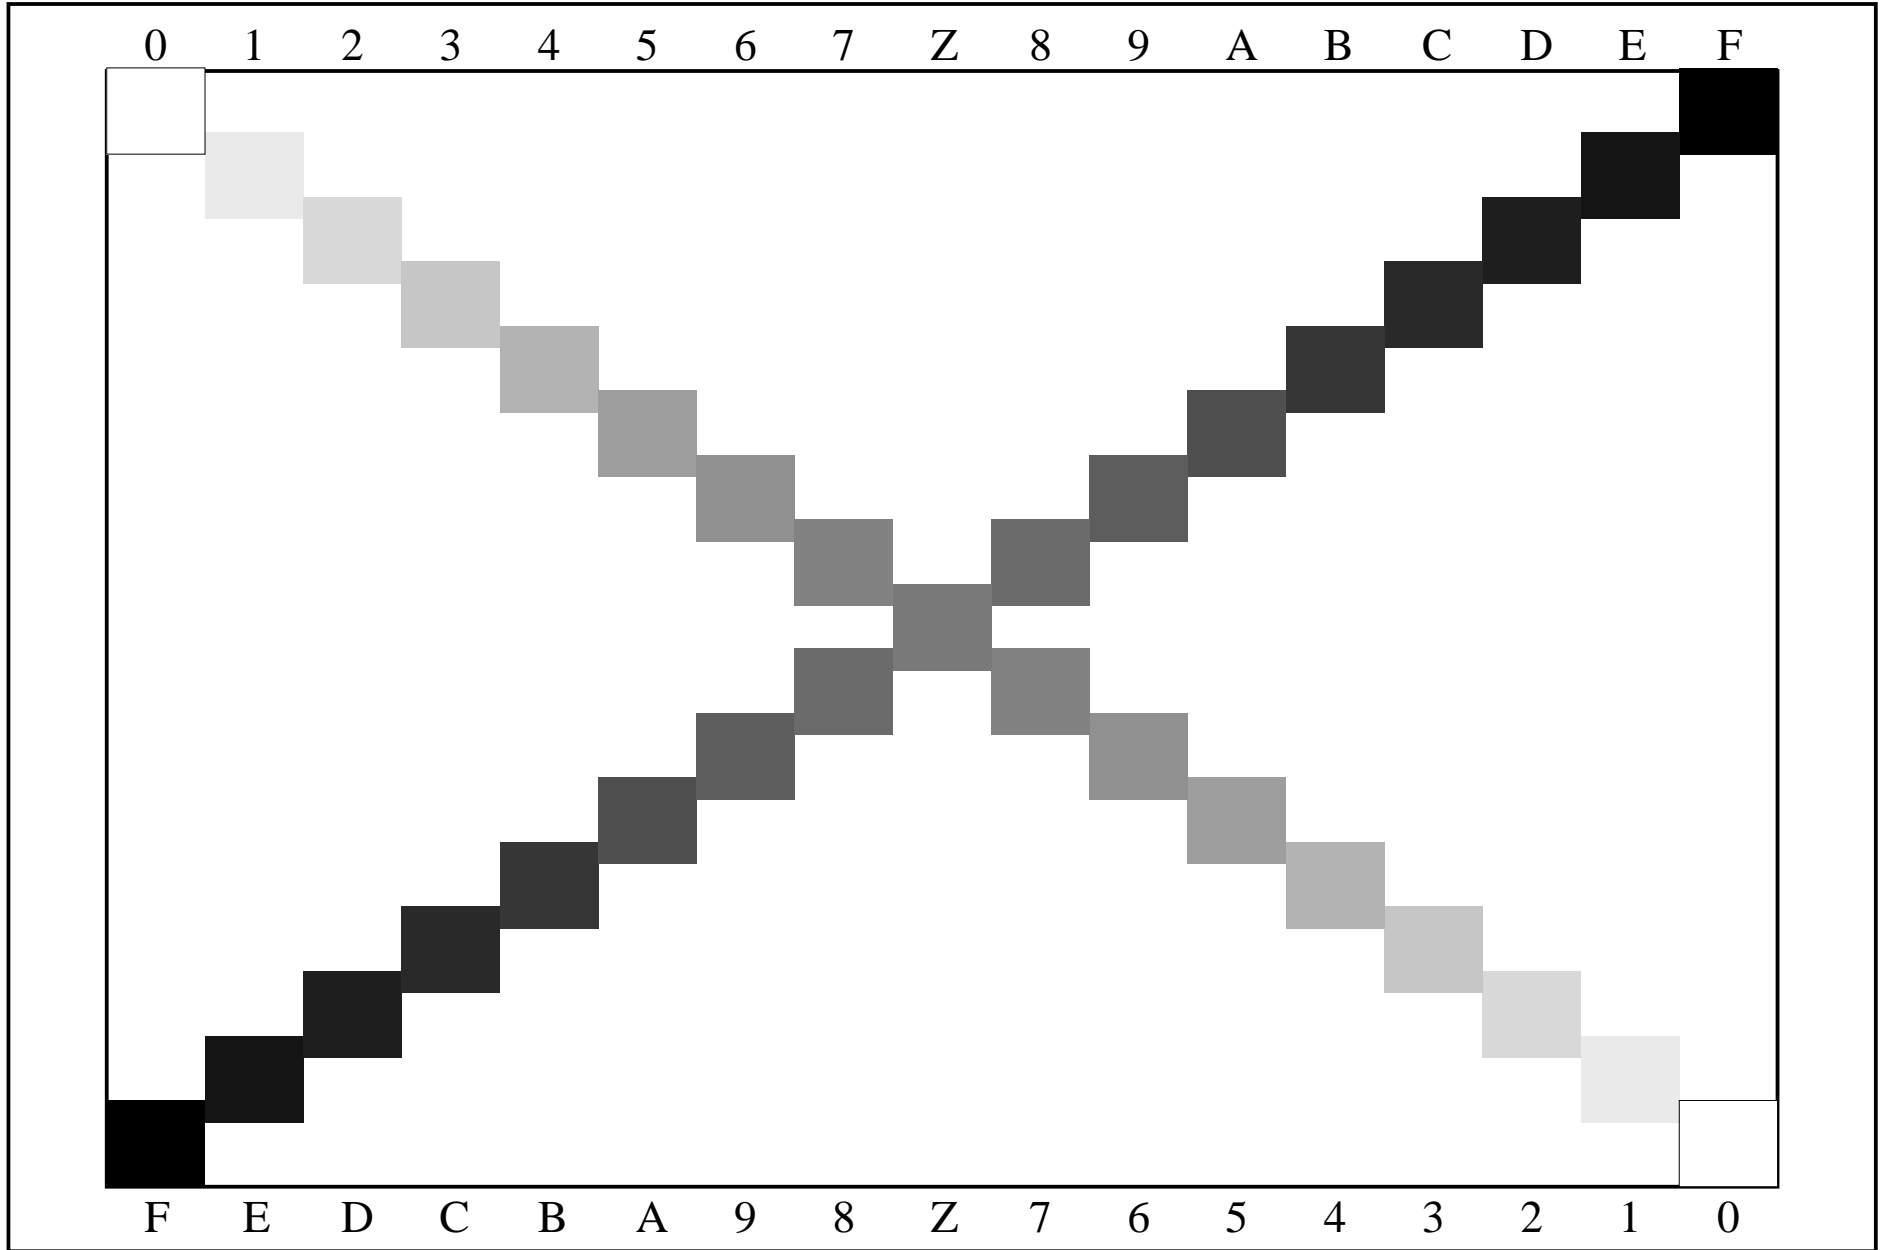

H10: 00 11 22 33 44 55 66 77 7F 88 99 AA BB CC DD EE FF

D10: 0 17 34 51 68 85 102 119 127 136 153 170 187 204 221 238 255 0 1

Test chart no. 1 according to DIN 33870: Test of refilled black toner modules

[www.ps.bam.de/DE02/10A/A10ES2A.PS/.TXT](http://www.ps.bam.de/DE02/10A/A10ES2A.PS/.TXT)