

Order of original standard DIN 33870:2001-01: Beuth-Verlag, D-10787 Berlin

L\* : 5.6 11.4 17.2 23.0 28.8 34.6 40.4 46.2 49.2 52.1 57.9 63.7 69.5 75.3 81.1 86.9 92.7  
Y : 0.6 1.3 2.3 3.8 5.7 8.3 11.5 15.4 17.7 20.2 25.8 32.4 40.1 48.8 58.7 69.9 82.4

L\*NS1 : 5.6 L\*WS1 : 92.7 xbox: 13.0 mm ybox: 11.0 mm yboxcor.: 10.65 mm  
f : 0.22 0.22 0.22 0.21 0.21 0.2 0.19 0.18 0.18 0.17 0.15 0.13 0.11 0.09 0.06 0.03 0.0


5.16-> 5.00

Technical information: <http://o2.ps.bam.de>

Image file version 1.6, F10ES2A.PS/.TXT

BAM registration: 2001 1020-33870D10

BAM-Reference material: code=rha4ra-33870D10

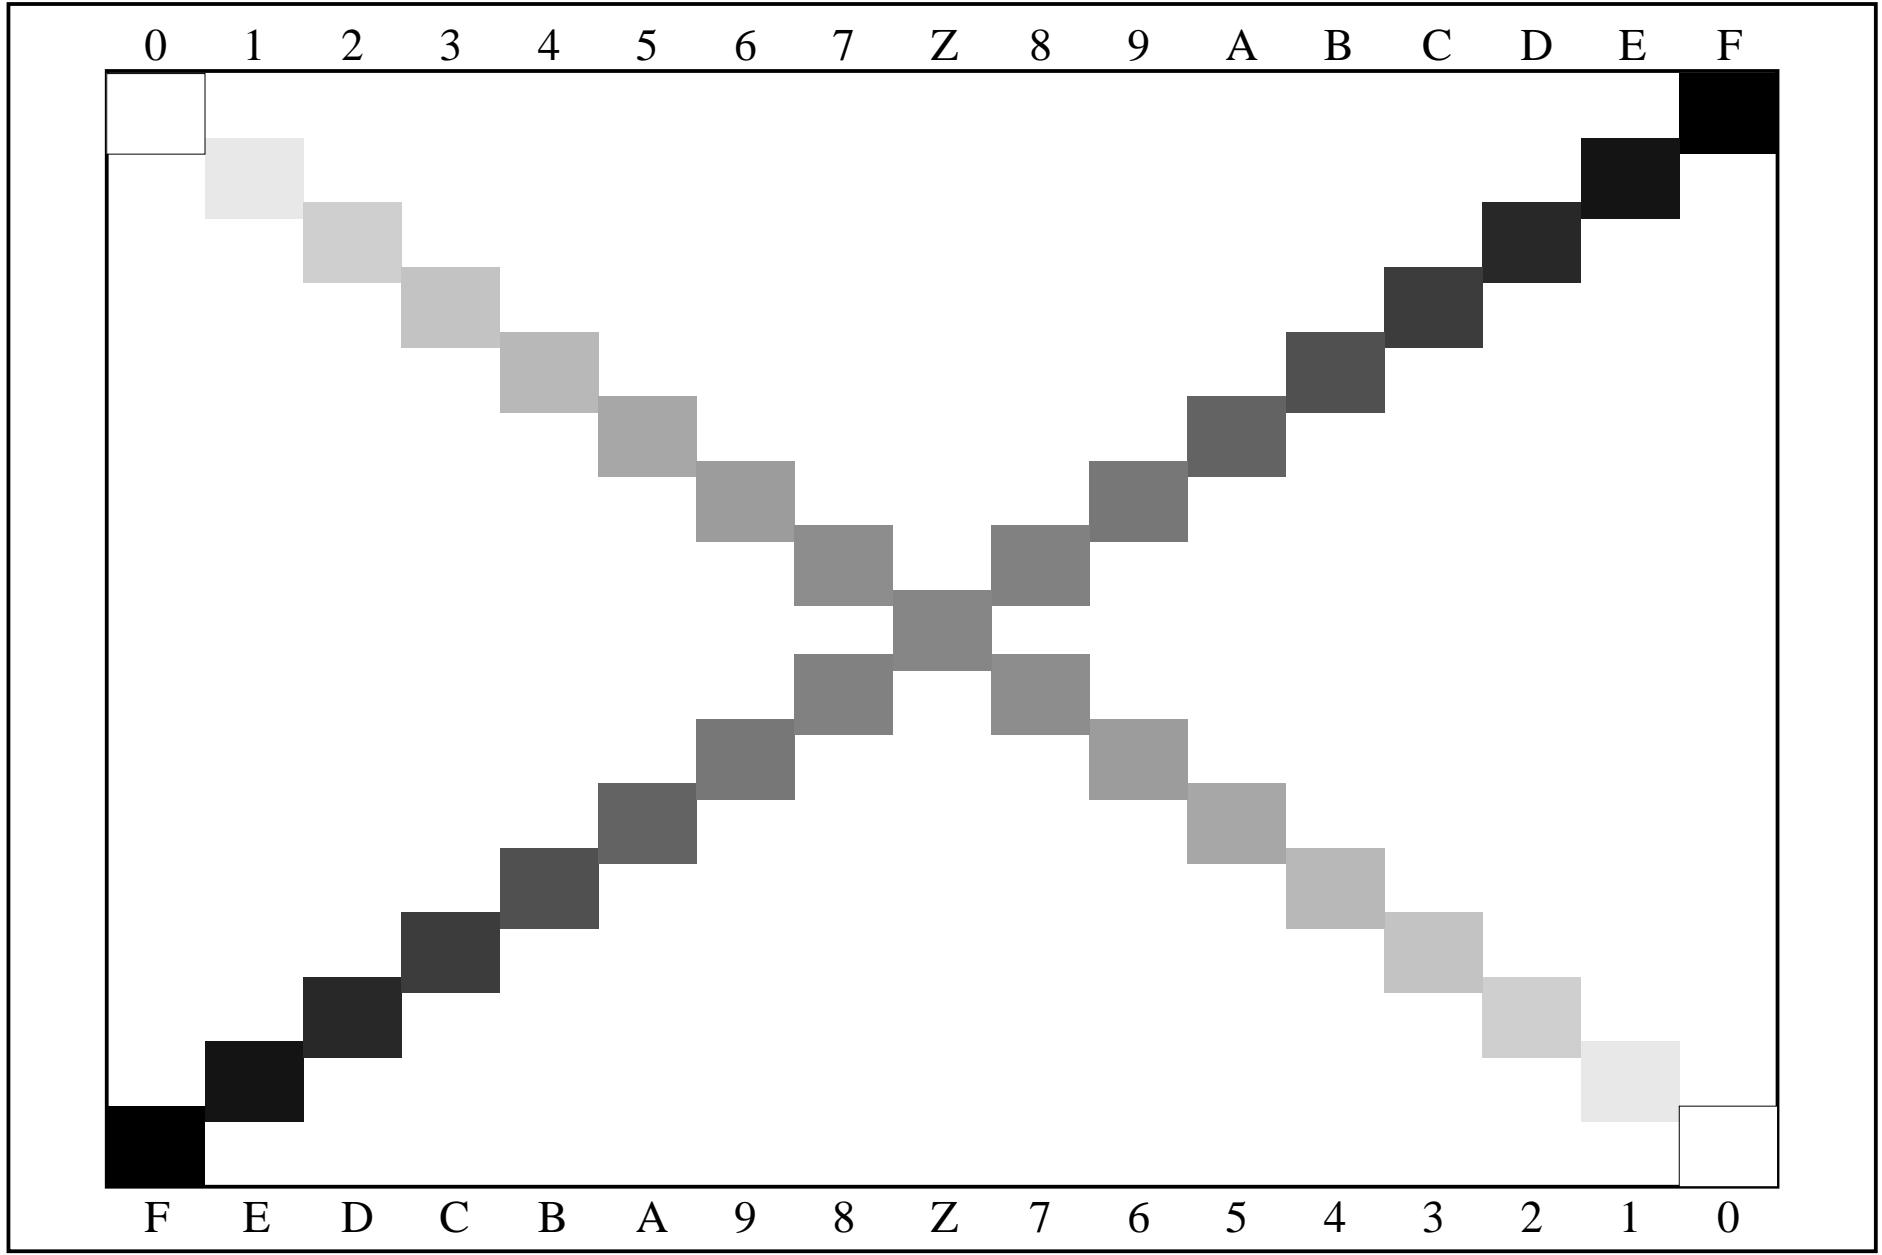

H10: 00 11 22 33 44 55 66 77 7F 88 99 AA BB CC DD EE FF

D10: 0 17 34 51 68 85 102 119 127 136 153 170 187 204 221 238 255 0 1

Test chart no. 1 according to DIN 33870: Test of refilled black toner modules

[www.ps.bam.de/DE02/10F/F10ES2A.PS/.TXT](http://www.ps.bam.de/DE02/10F/F10ES2A.PS/.TXT)