

Order of original standard DIN 33870:2001-01: Beuth-Verlag, D-10787 Berlin

L\* : 21.7 26.6 31.6 36.5 41.5 46.4 51.4 56.3 58.8 61.3 66.2 71.2 76.2 81.1 86.1 91.0 96.0  
 Y : 3.4 4.9 6.9 9.3 12.2 15.6 19.6 24.3 26.8 29.6 35.7 42.5 50.2 58.7 68.2 78.6 90.0

L\*NS1 : 21.7 L\*WS1 : 96.0 xbox: 13.0 mm ybox: 11.0 mm yboxcor.: 11.3 mm  
 f : 0.22 0.22 0.21 0.21 0.2 0.19 0.18 0.17 0.16 0.15 0.14 0.12 0.1 0.08 0.05 0.03 0.0


4.86-> 5.00

Technical information: <http://o2.ps.bam.de>

Image file version 1.6, O10ES2P.PS/.PDF

BAM registration: 20011020-33870D10

BAM-Reference material: code=rha4ra-33870D10

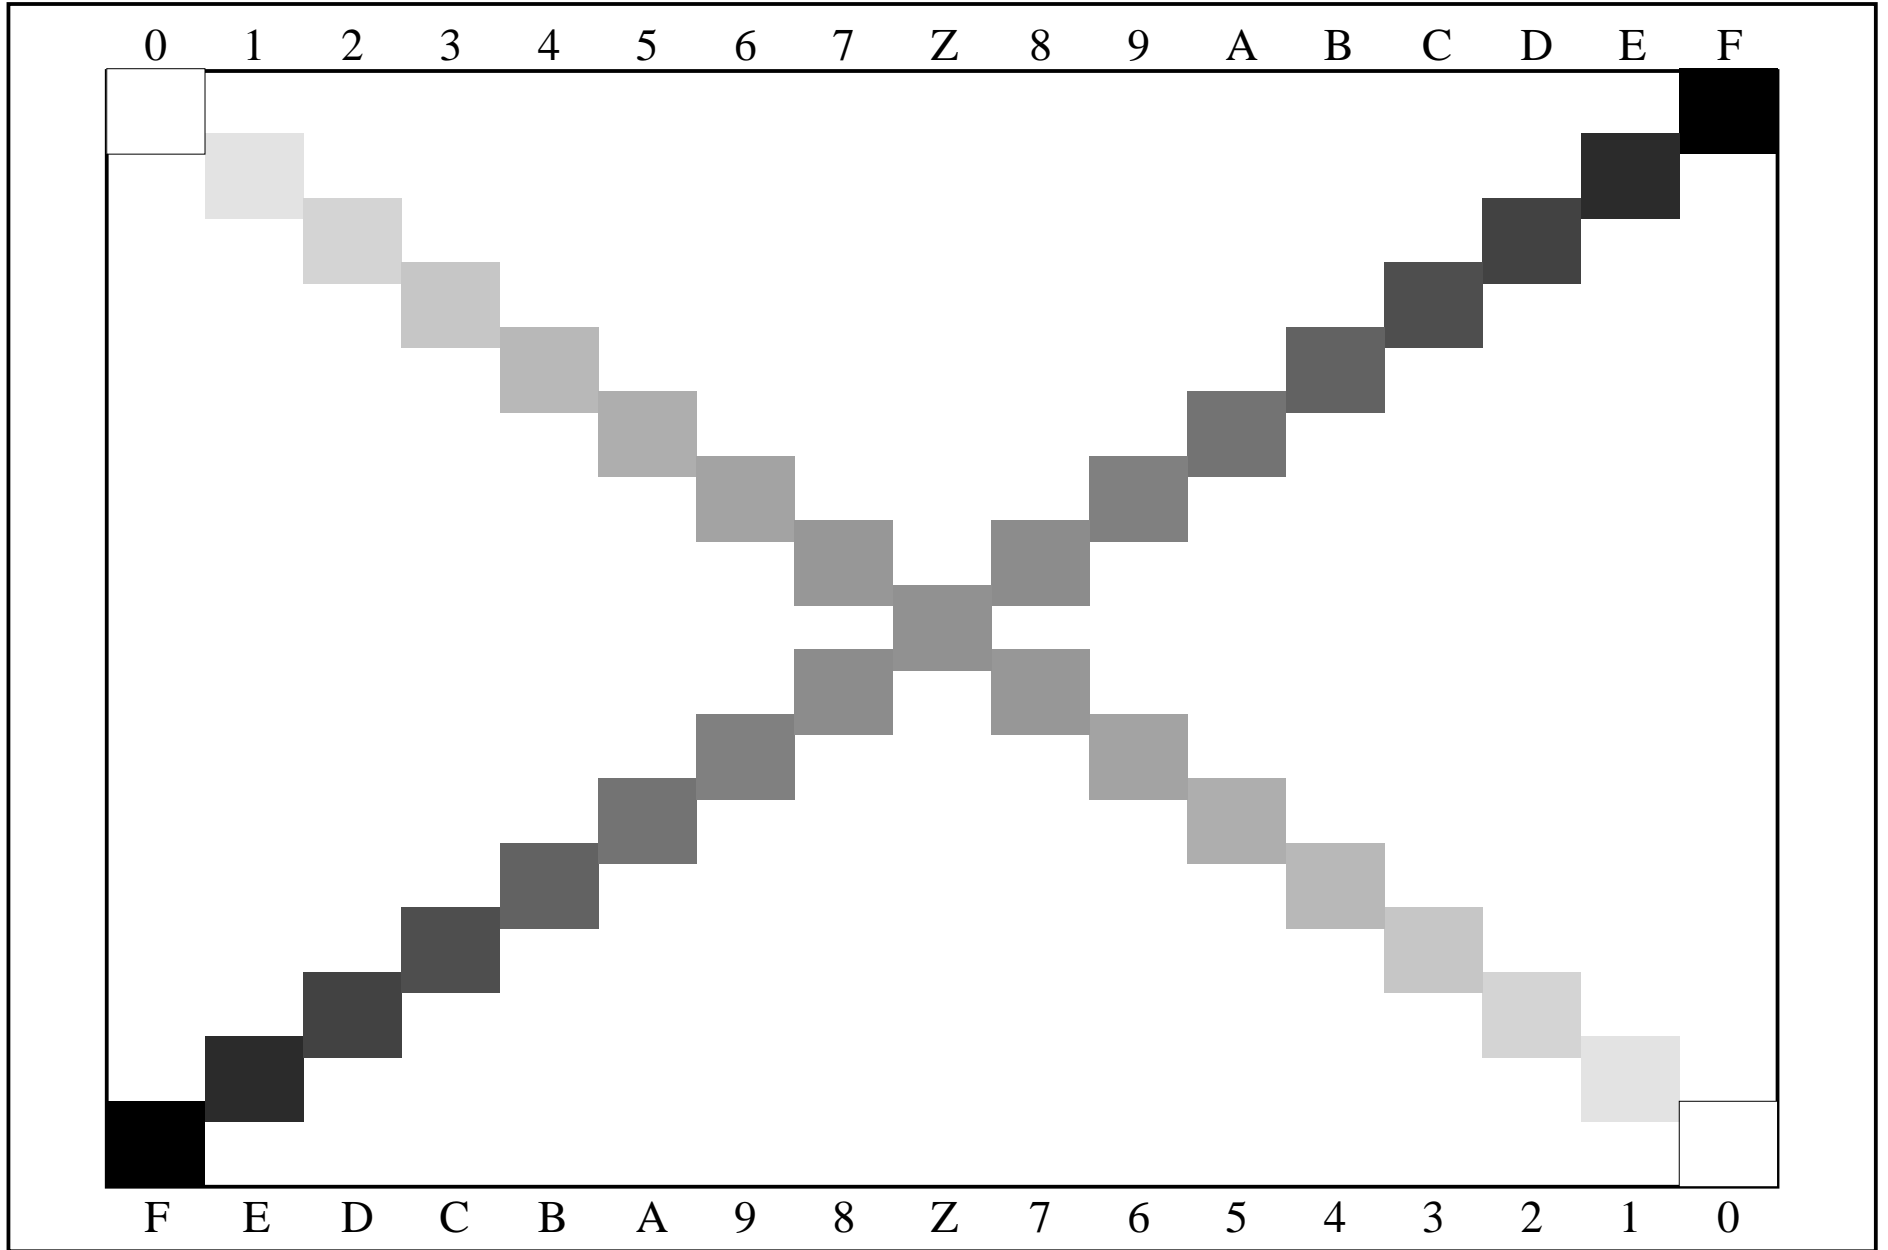

H10: 00 11 22 33 44 55 66 77 7F 88 99 AA BB CC DD EE FF

D10: 0 17 34 51 68 85 102 119 127 136 153 170 187 204 221 238 255 0 1

Test chart no. 1 according to DIN 33870: Test of refilled black toner modules

[www.ps.bam.de/DE02/100/O10ES2P.PS/.PDF](http://www.ps.bam.de/DE02/100/O10ES2P.PS/.PDF)