


i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Start output S1
1	58.62 -28.31 -41.05	58.62 -28.31 -41.05	0.0 0.0 0.0	0.01	Specification according to
2	60.84 -26.58 -38.56	59.78 -27.41 -39.75	-1.06 -0.82 -1.19	1.8	ISO/IEC 15775 Annex G
3	63.06 -24.85 -36.07	59.58 -27.56 -39.98	-3.48 -2.7 -3.9	5.9	and DIN 33866-1 Annex G
4	65.29 -23.12 -33.58	60.07 -27.18 -39.42	-5.21 -4.05 -5.84	8.82	relative CIELAB data used for "out"
5	67.51 -21.39 -31.09	60.94 -26.5 -38.45	-6.56 -5.1 -7.35	11.11	$\Delta L^* = 91.95 - 58.62$
6	69.73 -19.66 -28.6	62.95 -24.93 -36.19	-6.77 -5.27 -7.59	11.47	Regularity
7	71.95 -17.93 -26.11	63.84 -24.25 -35.2	-8.1 -6.31 -9.08	13.73	$g^* = 15.1$
8	74.17 -16.2 -23.62	65.3 -23.11 -33.56	-8.86 -6.9 -9.94	15.02	
9	76.4 -14.46 -21.12	67.64 -21.28 -30.94	-8.75 -6.81 -9.8	14.82	Lightness gamut rel. to offset
10	78.62 -12.73 -18.63	71.03 -18.64 -27.14	-7.58 -5.9 -8.49	12.83	$f^* = 43.1$
11	80.84 -11.0 -16.14	75.05 -15.52 -22.64	-5.78 -4.5 -6.48	9.8	
12	83.06 -9.27 -13.65	79.38 -12.14 -17.78	-3.67 -2.86 -4.12	6.23	ΔL^* -gray variation
13	85.28 -7.54 -11.16	83.59 -8.86 -13.07	-1.69 -1.31 -1.89	2.87	$v^* = 0.0$
14	87.51 -5.81 -8.67	87.07 -6.15 -9.16	-0.42 -0.33 -0.47	0.73	
15	89.73 -4.08 -6.18	89.59 -4.19 -6.34	-0.13 -0.1 -0.15	0.24	Mean CIELAB difference (16 steps)
16	91.95 -2.35 -3.69	91.95 -2.35 -3.69	0.0 0.0 0.0	0.01	$\Delta E^*_{\text{CIELAB}} = 7.2$
17	58.62 -28.31 -41.05	58.62 -28.31 -41.05	0.0 0.0 0.0	0.01	
18	66.95 -21.82 -31.71	60.72 -26.67 -38.69	-6.22 -4.84 -6.97	10.54	
19	75.28 -15.33 -22.37	66.47 -22.2 -32.25	-8.81 -6.86 -9.87	14.92	
20	83.62 -8.84 -13.03	80.43 -11.32 -16.6	-3.17 -2.47 -3.56	5.39	Mean CIELAB difference (5 steps)
21	91.95 -2.35 -3.69	91.95 -2.35 -3.69	0.0 0.0 0.0	0.01	$\Delta L^*_{\text{CIELAB}} = 6.2$
Mean colour reproduction index: $R^*_{\text{ab,m}} = 68$					

Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

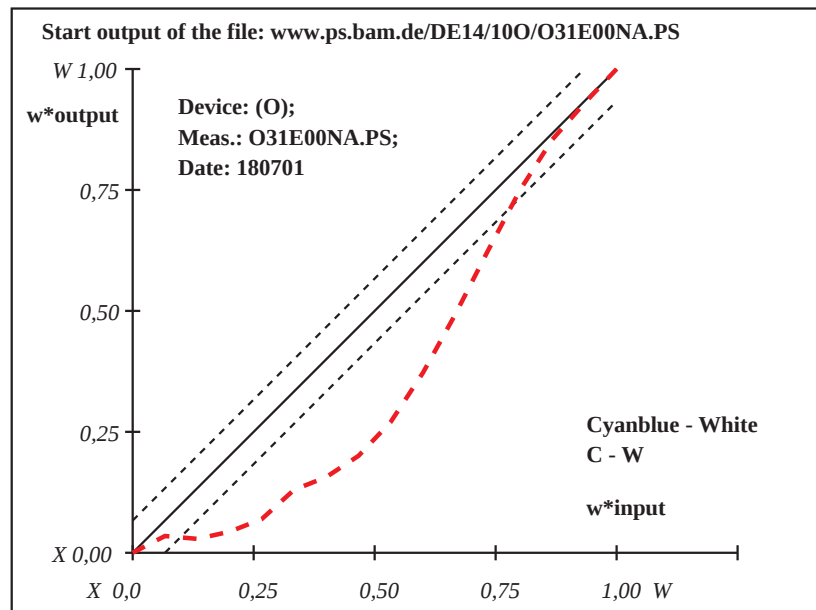

Device: (O); Meas.: O31E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O31E00NA.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*	Linearized output S2
1	55.79 -28.23 -43.32	55.79 -28.23 -43.32	0.0 0.0 0.0	0.01	Specification according to
2	58.22 -26.51 -40.63	59.91 -25.32 -38.76	1.69 1.2 1.87	2.79	ISO/IEC 15775 Annex G
3	60.65 -24.79 -37.95	61.78 -23.99 -36.7	1.13 0.8 1.25	1.87	and DIN 33866-1 Annex G
4	63.08 -23.07 -35.26	62.5 -23.49 -35.91	-0.58 -0.4 -0.64	0.97	relative CIELAB data used for "out"
5	65.52 -21.36 -32.57	62.38 -23.57 -36.04	-3.13 -2.21 -3.46	5.18	$\Delta L^* = 92.26 - 55.79$
6	67.95 -19.64 -29.89	65.23 -21.56 -32.89	-2.71 -1.91 -2.99	4.48	Regularity
7	70.38 -17.92 -27.2	68.29 -19.39 -29.5	-2.08 -1.46 -2.29	3.44	$g^* = 53.1$
8	72.81 -16.2 -24.51	70.82 -17.6 -26.71	-1.98 -1.39 -2.19	3.28	
9	75.24 -14.48 -21.83	73.63 -15.62 -23.6	-1.6 -1.13 -1.77	2.65	Lightness gamut rel. to offset
10	77.67 -12.76 -19.14	74.87 -14.74 -22.23	-2.79 -1.97 -3.08	4.62	$f^* = 47.1$
11	80.1 -11.04 -16.45	77.61 -12.81 -19.21	-2.49 -1.75 -2.75	4.12	
12	82.53 -9.32 -13.77	79.25 -11.65 -17.4	-3.28 -2.31 -3.62	5.42	ΔL^* -gray variation
13	84.97 -7.61 -11.08	81.5 -10.05 -14.9	-3.45 -2.44 -3.81	5.71	$v^* = 0.0$
14	87.4 -5.89 -8.39	84.82 -7.71 -11.24	-2.56 -1.81 -2.83	4.24	
15	89.83 -4.17 -5.71	88.61 -5.03 -7.05	-1.21 -0.85 -1.34	2.01	Mean CIELAB difference (16 steps)
16	92.26 -2.45 -3.02	92.26 -2.45 -3.02	0.0 0.0 0.0	0.01	$\Delta E^*_{\text{CIELAB}} = 3.2$
17	55.79 -28.23 -43.32	55.79 -28.23 -43.32	0.0 0.0 0.0	0.01	
18	64.91 -21.79 -33.25	62.41 -23.55 -36.01	-2.49 -1.76 -2.75	4.13	
19	74.03 -15.34 -23.17	72.23 -16.61 -25.16	-1.79 -1.26 -1.98	2.97	
20	83.14 -8.9 -13.1	79.81 -11.25 -16.78	-3.32 -2.34 -3.67	5.49	Mean CIELAB difference (5 steps)
21	92.26 -2.45 -3.02	92.26 -2.45 -3.02	0.0 0.0 0.0	0.01	$\Delta L^*_{\text{CIELAB}} = 2.5$
Mean colour reproduction index: $R^*_{\text{ab,m}} = 86$					

Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS

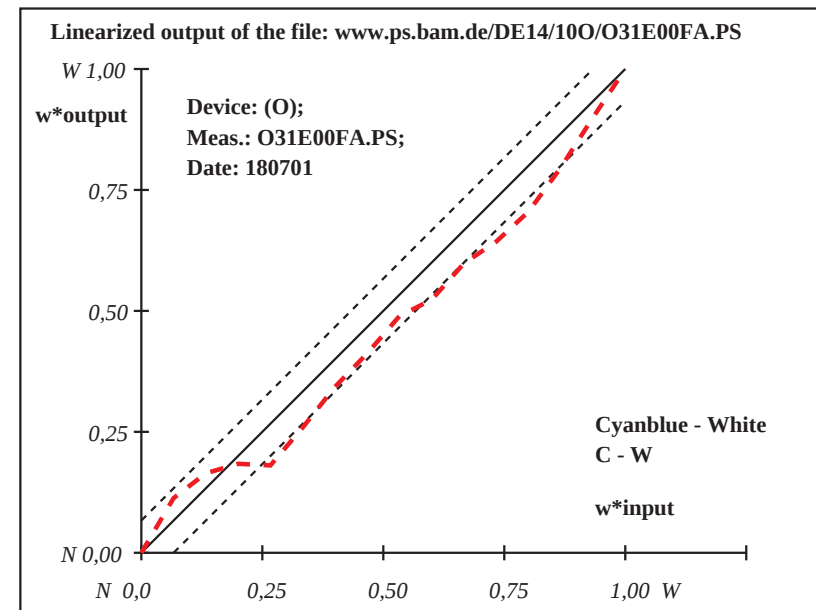


Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.21 - 46.89$ Regularity $g^* = 17.0$ Lightness gamut rel. to offset $f^* = 58.6$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 7.5$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 5.4$ Mean colour reproduction index: $R^*_{ab,m} = 68$
1	46.89	62.02	-3.61	46.89	62.02	-3.61	0.0	0.0	0.0	0.01	
2	49.91	57.7	-3.6	47.55	61.08	-3.61	-2.36	3.38	0.0	4.13	
3	52.93	53.39	-3.59	48.27	60.05	-3.61	-4.65	6.66	-0.01	8.13	
4	55.95	49.07	-3.58	49.36	58.49	-3.6	-6.58	9.41	-0.01	11.49	
5	58.98	44.76	-3.57	50.29	57.16	-3.6	-8.68	12.41	-0.02	15.15	
6	62.0	40.44	-3.56	52.07	54.62	-3.59	-9.92	14.18	-0.02	17.32	
7	65.02	36.12	-3.55	56.71	47.99	-3.58	-8.3	11.87	-0.02	14.49	
8	68.04	31.81	-3.54	60.26	42.93	-3.57	-7.77	11.12	-0.02	13.57	
9	71.06	27.49	-3.53	65.78	35.03	-3.55	-5.27	7.54	-0.01	9.2	
10	74.08	23.18	-3.52	69.88	29.17	-3.53	-4.19	6.0	0.0	7.32	
11	77.1	18.86	-3.51	75.02	21.83	-3.52	-2.07	2.97	0.0	3.63	
12	80.12	14.54	-3.5	80.36	14.2	-3.5	0.24	-0.33	0.0	0.41	
13	83.15	10.23	-3.49	85.73	6.54	-3.48	2.58	-3.67	0.01	4.5	
14	86.17	5.91	-3.48	89.92	0.55	-3.47	3.75	-5.35	0.01	6.55	
15	89.19	1.6	-3.47	91.77	-2.08	-3.46	2.58	-3.68	0.01	4.5	
16	92.21	-2.71	-3.46	92.21	-2.71	-3.46	0.0	0.0	0.0	0.01	
17	46.89	62.02	-3.61	46.89	62.02	-3.61	0.0	0.0	0.0	0.01	
18	58.22	45.84	-3.57	50.06	57.49	-3.6	-8.15	11.66	-0.02	14.23	
19	69.55	29.65	-3.54	63.02	38.98	-3.56	-6.52	9.33	-0.01	11.39	
20	80.88	13.47	-3.5	81.7	12.29	-3.49	0.82	-1.17	0.0	1.44	
21	92.21	-2.71	-3.46	92.21	-2.71	-3.46	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

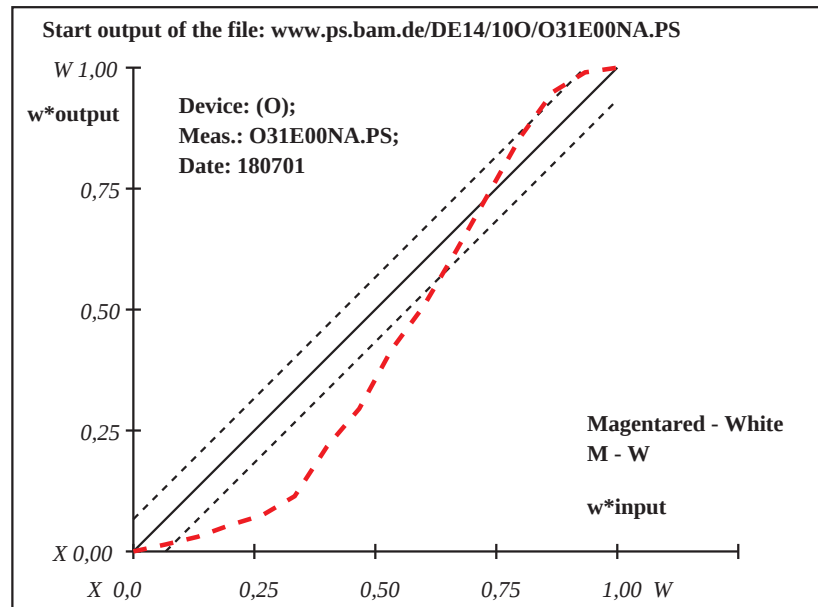


Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.07 - 45.26$ Regularity $g^* = 61.6$ Lightness gamut rel. to offset $f^* = 60.5$ ΔL^* -gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 4.0$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 3.2$ Mean colour reproduction index: $R^*_{ab,m} = 83$
1	45.26	65.02	-3.85	45.26	65.02	-3.85	0.0	0.0	0.0	0.01	
2	48.38	60.53	-3.82	49.53	58.88	-3.81	1.15	-1.64	0.01	2.01	
3	51.5	56.04	-3.79	52.51	54.59	-3.78	1.01	-1.44	0.01	1.77	
4	54.62	51.55	-3.76	56.93	48.22	-3.73	2.31	-3.32	0.02	4.05	
5	57.74	47.06	-3.72	60.34	43.32	-3.7	2.6	-3.73	0.03	4.55	
6	60.86	42.57	-3.69	64.24	37.71	-3.66	3.37	-4.84	0.03	5.91	
7	63.98	38.08	-3.66	68.17	32.06	-3.62	4.18	-6.01	0.04	7.33	
8	67.1	33.59	-3.63	71.14	27.78	-3.59	4.04	-5.8	0.04	7.07	
9	70.23	29.09	-3.6	73.49	24.39	-3.57	3.27	-4.69	0.03	5.73	
10	73.35	24.6	-3.57	75.73	21.18	-3.54	2.38	-3.42	0.02	4.17	
11	76.47	20.11	-3.54	79.47	15.79	-3.51	3.01	-4.32	0.03	5.27	
12	79.59	15.62	-3.51	82.63	11.24	-3.47	3.04	-4.37	0.03	5.34	
13	82.71	11.13	-3.47	85.35	7.34	-3.45	2.64	-3.79	0.03	4.62	
14	85.83	6.64	-3.44	87.59	4.1	-3.42	1.76	-2.53	0.02	3.09	
15	88.95	2.15	-3.41	90.48	-0.05	-3.4	1.53	-2.2	0.02	2.69	
16	92.07	-2.33	-3.38	92.07	-2.33	-3.38	0.0	0.0	0.0	0.01	
17	45.26	65.02	-3.85	45.26	65.02	-3.85	0.0	0.0	0.0	0.01	
18	56.96	48.18	-3.73	59.49	44.54	-3.71	2.53	-3.63	0.03	4.43	
19	68.67	31.34	-3.62	72.32	26.08	-3.58	3.65	-5.25	0.04	6.4	
20	80.37	14.5	-3.5	83.31	10.26	-3.47	2.94	-4.23	0.03	5.16	
21	92.07	-2.33	-3.38	92.07	-2.33	-3.38	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS

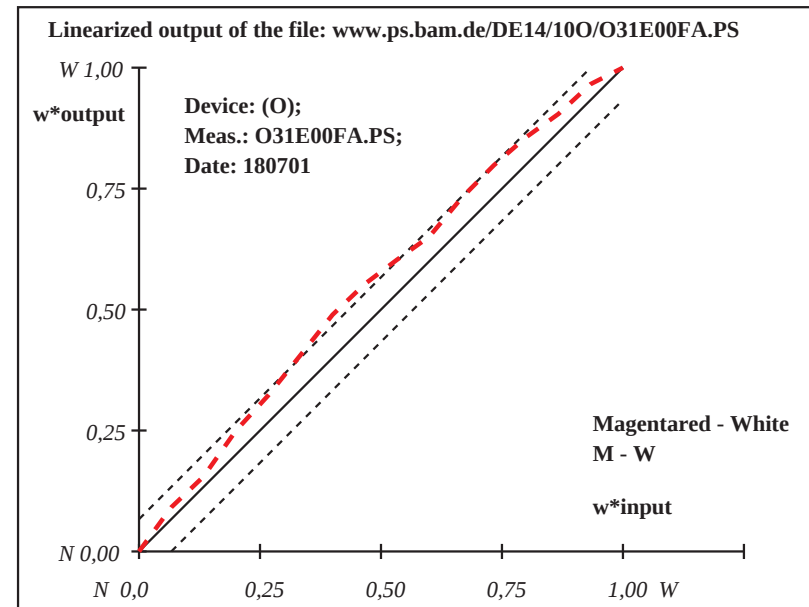

Device: (O); Meas.: O31E00FA.PS; Date: 180701


www.ps.bam.de/DE14/100/O31E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	87.52 -19.47 87.72	87.52 -19.47 87.72	0.0 0.0 0.0	0.01
2	87.79 -18.23 81.56	87.69 -18.68 83.79	-0.09 -0.44 2.23	2.28
3	88.06 -16.99 75.39	87.84 -18.01 80.44	-0.21 -1.0 5.05	5.15
4	88.34 -15.75 69.23	87.96 -17.48 77.81	-0.37 -1.72 8.58	8.76
5	88.61 -14.51 63.06	88.1 -16.85 74.68	-0.5 -2.33 11.61	11.86
6	88.88 -13.27 56.9	88.25 -16.14 71.15	-0.62 -2.86 14.25	14.55
7	89.15 -12.03 50.74	88.52 -14.91 65.06	-0.62 -2.87 14.32	14.62
8	89.42 -10.79 44.57	88.8 -13.63 58.68	-0.61 -2.83 14.11	14.4
9	89.7 -9.56 38.41	88.99 -12.78 54.44	-0.7 -3.21 16.04	16.37
10	89.97 -8.32 32.24	89.37 -11.04 45.81	-0.59 -2.72 13.56	13.85
11	90.24 -7.08 26.08	89.72 -9.44 37.84	-0.51 -2.36 11.76	12.01
12	90.51 -5.84 19.92	90.18 -7.36 27.48	-0.32 -1.51 7.57	7.72
13	90.78 -4.6 13.75	90.55 -5.64 18.95	-0.22 -1.03 5.19	5.3
14	91.06 -3.36 7.59	90.86 -4.24 11.96	-0.18 -0.87 4.37	4.46
15	91.33 -2.12 1.42	91.24 -2.51 3.35	-0.07 -0.38 1.93	1.97
16	91.6 -0.88 -4.73	91.6 -0.88 -4.73	0.0 0.0 0.0	0.01
17	87.52 -19.47 87.72	87.52 -19.47 87.72	0.0 0.0 0.0	0.01
18	88.54 -14.82 64.61	88.06 -17.01 75.46	-0.47 -2.17 10.86	11.08
19	89.56 -10.17 41.49	88.89 -13.21 56.56	-0.66 -3.02 15.07	15.39
20	90.58 -5.53 18.38	90.27 -6.93 25.35	-0.3 -1.39 6.97	7.12
21	91.6 -0.88 -4.73	91.6 -0.88 -4.73	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.6 - 87.52$
Regularity
 $g^* = 39.3$
Lightness gamut rel. to offset
 $f^* = 5.3$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 8.3$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 6.7$
Mean colour reproduction index: $R^*_{ab,m} = 63$

Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

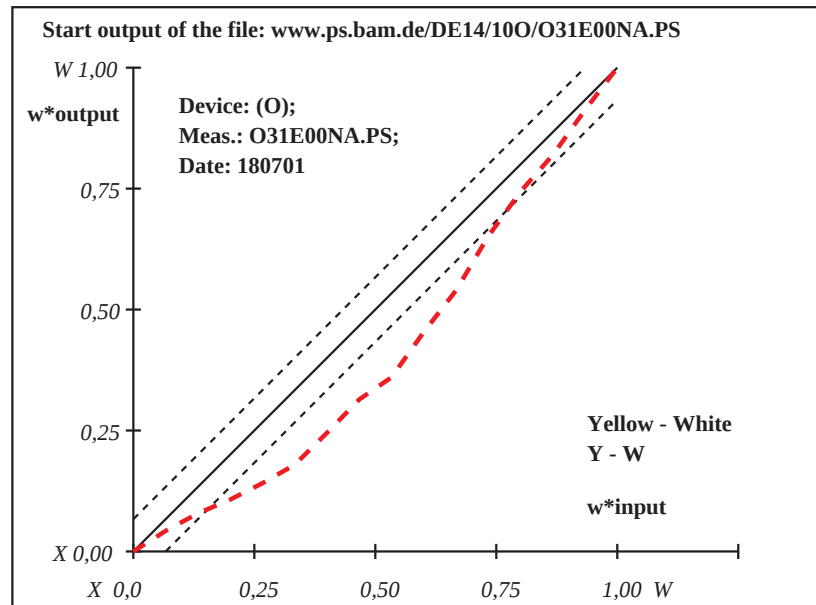

Device: (O); Meas.: O31E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O31E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	87.57 -19.48 89.15	87.57 -19.48 89.15	0.0 0.0 0.0	0.01
2	87.88 -18.33 82.98	88.13 -17.38 77.84	0.26 0.95 -5.12	5.23
3	88.18 -17.19 76.81	88.37 -16.48 73.03	0.19 0.7 -3.76	3.84
4	88.49 -16.04 70.63	88.48 -16.07 70.82	0.0 -0.03 0.19	0.19
5	88.8 -14.89 64.46	88.67 -15.37 67.06	-0.12 -0.47 2.6	2.64
6	89.11 -13.74 58.29	88.76 -15.04 65.28	-0.34 -1.29 6.99	7.11
7	89.41 -12.6 52.12	89.2 -13.41 56.48	-0.21 -0.8 4.36	4.44
8	89.72 -11.45 45.95	89.38 -12.71 52.71	-0.33 -1.25 6.77	6.89
9	90.03 -10.3 39.77	89.85 -10.96 43.33	-0.17 -0.65 3.55	3.62
10	90.34 -9.15 33.6	90.15 -9.85 37.33	-0.18 -0.68 3.73	3.79
11	90.64 -8.01 27.43	90.42 -8.84 31.93	-0.21 -0.83 4.5	4.59
12	90.95 -6.86 21.26	90.68 -7.87 26.67	-0.26 -1.0 5.41	5.51
13	91.26 -5.71 15.09	90.97 -6.79 20.87	-0.28 -1.07 5.79	5.89
14	91.57 -4.56 8.91	91.45 -5.0 11.26	-0.11 -0.43 2.35	2.39
15	91.87 -3.42 2.74	91.81 -3.64 3.92	-0.05 -0.21 1.18	1.2
16	92.18 -2.27 -3.42	92.18 -2.27 -3.42	0.0 0.0 0.0	0.01
17	87.57 -19.48 89.15	87.57 -19.48 89.15	0.0 0.0 0.0	0.01
18	88.72 -15.18 66.01	88.62 -15.55 68.0	-0.09 -0.36 1.99	2.03
19	89.88 -10.88 42.86	89.62 -11.83 48.02	-0.25 -0.95 5.16	5.26
20	91.03 -6.57 19.72	90.75 -7.6 25.22	-0.26 -1.01 5.51	5.61
21	92.18 -2.27 -3.42	92.18 -2.27 -3.42	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.18 - 87.57$
Regularity
 $g^* = 69.7$
Lightness gamut rel. to offset
 $f^* = 6.0$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 3.6$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 2.6$
Mean colour reproduction index: $R^*_{ab,m} = 85$

Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS

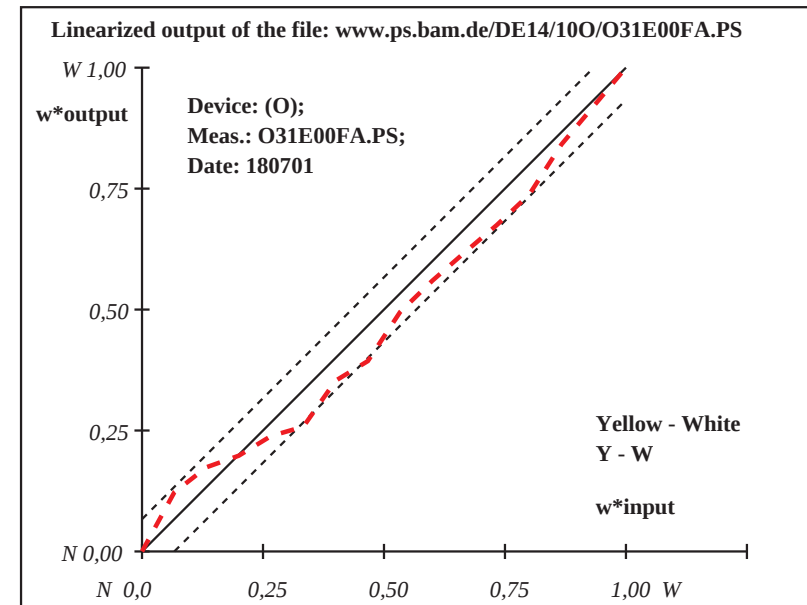

Device: (O); Meas.: O31E00FA.PS; Date: 180701


www.ps.bam.de/DE14/100/O31E00FA.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Start output S1 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.25 - 29.73$ Regularity $g^* = 72.9$ Lightness gamut rel. to offset $f^* = 80.8$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 1.4$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 1.0$ Mean colour reproduction index: $R^*_{ab,m} = 94$
1	29.73	-0.17	-0.22	29.73	-0.17	-0.22	0.0	0.0	0.0	0.01	
2	33.9	-0.32	-0.47	32.53	-0.27	-0.39	-1.35	0.05	0.08	1.37	
3	38.07	-0.48	-0.72	35.5	-0.38	-0.57	-2.55	0.09	0.16	2.57	
4	42.23	-0.63	-0.98	39.95	-0.55	-0.84	-2.27	0.08	0.14	2.29	
5	46.4	-0.78	-1.23	44.22	-0.7	-1.1	-2.17	0.08	0.13	2.18	
6	50.57	-0.94	-1.48	47.69	-0.83	-1.31	-2.87	0.11	0.17	2.88	
7	54.74	-1.09	-1.73	52.8	-1.02	-1.61	-1.93	0.07	0.12	1.95	
8	58.91	-1.24	-1.98	56.18	-1.14	-1.82	-2.72	0.1	0.16	2.73	
9	63.07	-1.4	-2.24	61.86	-1.35	-2.16	-1.21	0.04	0.07	1.22	
10	67.24	-1.55	-2.49	67.51	-1.56	-2.5	0.27	0.0	-0.01	0.27	
11	71.41	-1.7	-2.74	71.84	-1.72	-2.77	0.43	-0.01	-0.02	0.43	
12	75.58	-1.86	-2.99	76.35	-1.88	-3.04	0.77	-0.02	-0.04	0.77	
13	79.75	-2.01	-3.24	80.7	-2.04	-3.3	0.95	-0.02	-0.05	0.95	
14	83.91	-2.16	-3.5	85.45	-2.22	-3.59	1.54	-0.05	-0.08	1.54	
15	88.08	-2.32	-3.75	89.32	-2.36	-3.82	1.23	-0.04	-0.06	1.24	
16	92.25	-2.47	-4.0	92.25	-2.47	-4.0	0.0	0.0	0.0	0.01	
17	29.73	-0.17	-0.22	29.73	-0.17	-0.22	0.0	0.0	0.0	0.01	
18	45.36	-0.75	-1.17	43.16	-0.66	-1.03	-2.19	0.08	0.13	2.21	
19	60.99	-1.32	-2.11	59.02	-1.25	-1.99	-1.96	0.07	0.12	1.98	
20	76.62	-1.9	-3.06	77.44	-1.92	-3.1	0.82	-0.02	-0.04	0.82	
21	92.25	-2.47	-4.0	92.25	-2.47	-4.0	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

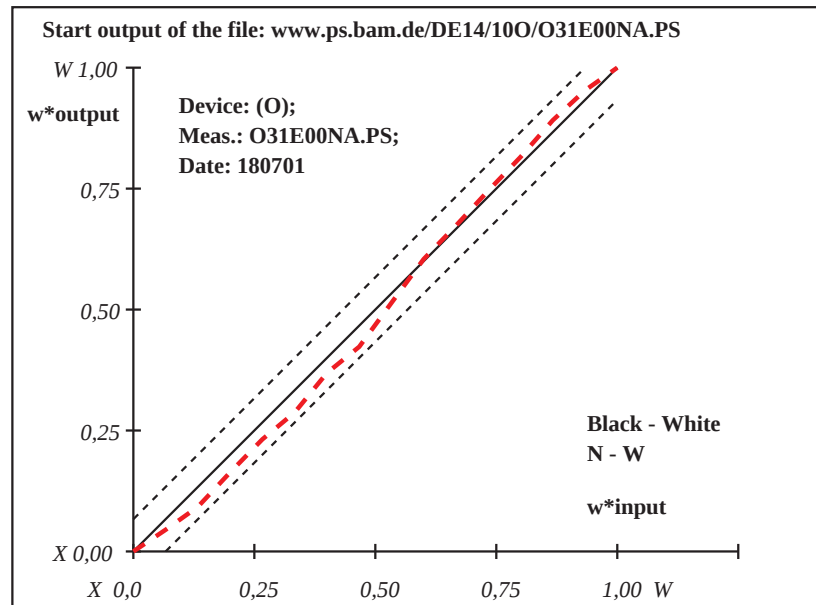


Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*	Linearized output S2 Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G relative CIELAB data used for "out" $\Delta L^* = 92.12 - 30.42$ Regularity $g^* = 77.3$ Lightness gamut rel. to offset $f^* = 79.7$ ΔL^*-gray variation $v^* = 0.0$ Mean CIELAB difference (16 steps) $\Delta E^*_{CIELAB} = 2.0$ Mean CIELAB difference (5 steps) $\Delta L^*_{CIELAB} = 1.3$ Mean colour reproduction index: $R^*_{ab,m} = 92$
1	30.42	-0.37	0.09	30.42	-0.37	0.09	0.0	0.0	0.0	0.01	
2	34.53	-0.51	-0.13	39.15	-0.66	-0.38	4.62	-0.14	-0.25	4.63	
3	38.65	-0.64	-0.36	43.95	-0.82	-0.65	5.3	-0.17	-0.28	5.31	
4	42.76	-0.78	-0.58	46.5	-0.9	-0.79	3.74	-0.11	-0.2	3.75	
5	46.87	-0.92	-0.81	49.51	-1.0	-0.96	2.64	-0.08	-0.14	2.64	
6	50.99	-1.05	-1.04	53.35	-1.13	-1.17	2.36	-0.07	-0.12	2.37	
7	55.1	-1.19	-1.27	56.75	-1.24	-1.36	1.65	-0.04	-0.08	1.65	
8	59.21	-1.33	-1.5	60.61	-1.37	-1.57	1.39	-0.04	-0.07	1.4	
9	63.33	-1.46	-1.72	66.04	-1.55	-1.87	2.72	-0.08	-0.14	2.72	
10	67.44	-1.6	-1.95	69.23	-1.66	-2.05	1.79	-0.05	-0.09	1.8	
11	71.55	-1.74	-2.18	73.44	-1.8	-2.28	1.89	-0.05	-0.09	1.89	
12	75.67	-1.87	-2.41	77.02	-1.92	-2.48	1.36	-0.04	-0.07	1.36	
13	79.78	-2.01	-2.64	80.74	-2.04	-2.69	0.96	-0.02	-0.04	0.97	
14	83.89	-2.15	-2.86	85.08	-2.19	-2.93	1.19	-0.03	-0.06	1.19	
15	88.01	-2.28	-3.09	88.67	-2.31	-3.13	0.66	-0.01	-0.03	0.66	
16	92.12	-2.42	-3.32	92.12	-2.42	-3.32	0.0	0.0	0.0	0.01	
17	30.42	-0.37	0.09	30.42	-0.37	0.09	0.0	0.0	0.0	0.01	
18	45.85	-0.88	-0.76	48.76	-0.98	-0.92	2.91	-0.09	-0.15	2.92	
19	61.27	-1.4	-1.61	63.32	-1.46	-1.72	2.05	-0.06	-0.1	2.06	
20	76.7	-1.91	-2.46	77.95	-1.95	-2.53	1.26	-0.03	-0.06	1.26	
21	92.12	-2.42	-3.32	92.12	-2.42	-3.32	0.0	0.0	0.0	0.01	

Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS

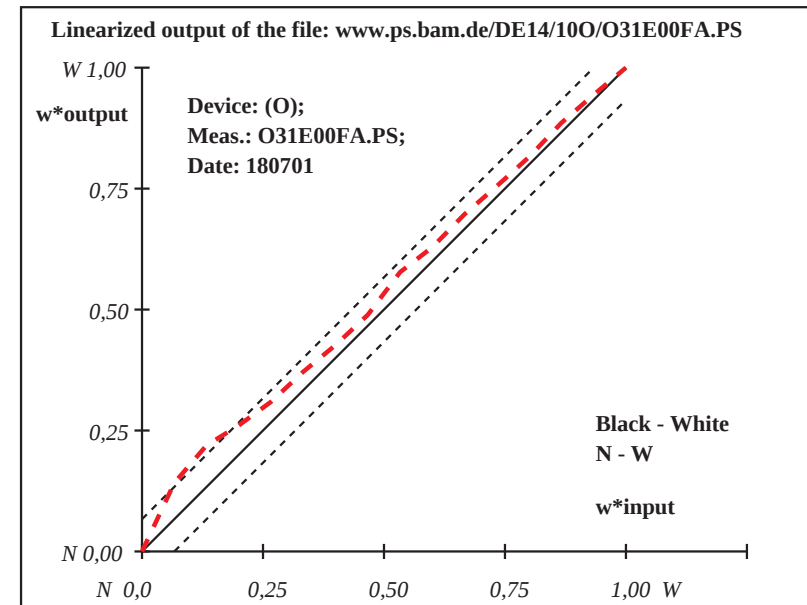

Device: (O); Meas.: O31E00FA.PS; Date: 180701


www.ps.bam.de/DE14/100/O31E00FA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	44.05 55.37 27.54	44.05 55.37 27.54	0.0 0.0 0.0	0.01
2	47.23 51.55 25.42	44.97 54.26 26.93	-2.25 2.71 1.5	3.84
3	50.42 47.73 23.3	45.98 53.05 26.25	-4.43 5.32 2.95	7.53
4	53.6 43.91 21.18	47.25 51.53 25.41	-6.34 7.62 4.23	10.78
5	56.79 40.09 19.07	48.54 49.98 24.55	-8.24 9.89 5.49	14.0
6	59.97 36.27 16.95	49.81 48.46 23.71	-10.15 12.19 6.76	17.25
7	63.16 32.45 14.83	55.08 42.14 20.2	-8.07 9.69 5.37	13.71
8	66.34 28.63 12.71	57.87 38.79 18.35	-8.46 10.16 5.64	14.38
9	69.53 24.82 10.59	63.65 31.86 14.5	-5.86 7.04 3.91	9.97
10	72.71 21.0 8.47	68.29 26.3 11.41	-4.41 5.3 2.94	7.5
11	75.9 17.18 6.35	73.81 19.68 7.74	-2.08 2.5 1.39	3.54
12	79.08 13.36 4.23	79.25 13.15 4.12	0.17 -0.2 -0.1	0.29
13	82.27 9.54 2.12	84.66 6.67 0.52	2.39 -2.86 -1.58	4.06
14	85.45 5.72 0.0	89.39 1.0 -2.61	3.94 -4.71 -2.61	6.68
15	88.64 1.9 -2.11	91.27 -1.25 -3.86	2.63 -3.15 -1.74	4.47
16	91.82 -1.91 -4.23	91.82 -1.91 -4.23	0.0 0.0 0.0	0.01
17	44.05 55.37 27.54	44.05 55.37 27.54	0.0 0.0 0.0	0.01
18	55.99 41.05 19.6	48.22 50.37 24.77	-7.76 9.32 5.17	13.19
19	67.94 26.73 11.65	60.76 35.33 16.42	-7.16 8.6 4.77	12.17
20	79.88 12.4 3.71	80.6 11.53 3.22	0.73 -0.86 -0.47	1.23
21	91.82 -1.91 -4.23	91.82 -1.91 -4.23	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.82 - 44.05$
Regularity
 $g^* = 21.0$
Lightness gamut rel. to offset
 $f^* = 61.7$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 7.4$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 5.3$
Mean colour reproduction index: $R^*_{ab,m} = 68$

Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

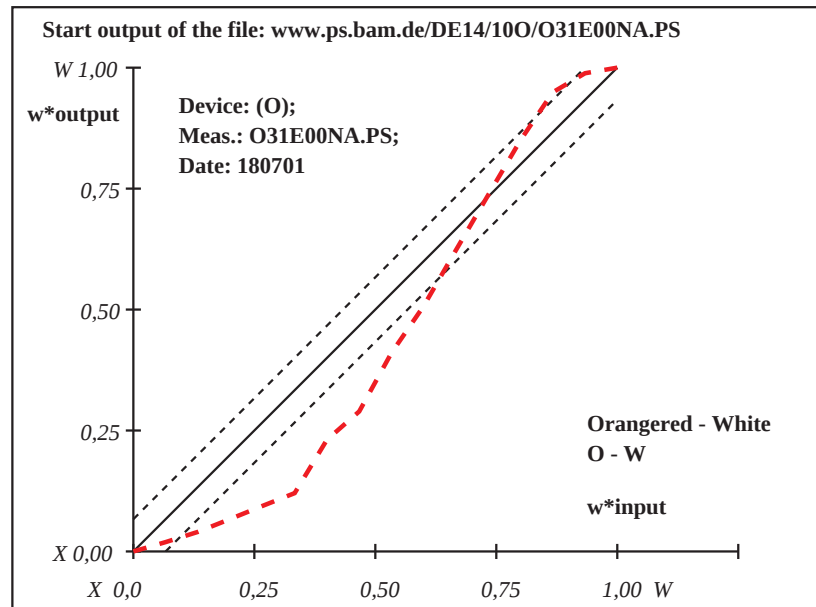

Device: (O); Meas.: O31E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O31E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	43.88 53.98 26.86	43.88 53.98 26.86	0.0 0.0 0.0	0.01
2	47.09 50.25 24.84	46.76 50.63 25.05	-0.32 0.38 0.21	0.55
3	50.31 46.51 22.83	50.97 45.74 22.41	0.66 -0.76 -0.41	1.1
4	53.52 42.78 20.81	54.0 42.23 20.51	0.48 -0.55 -0.29	0.79
5	56.74 39.05 18.8	56.97 38.78 18.65	0.23 -0.26 -0.13	0.38
6	59.95 35.32 16.78	59.08 36.32 17.32	-0.86 1.01 0.54	1.44
7	63.16 31.58 14.76	62.2 32.7 15.37	-0.95 1.12 0.61	1.6
8	66.38 27.85 12.75	63.99 30.62 14.24	-2.37 2.77 1.5	3.95
9	69.59 24.12 10.73	67.63 26.39 11.96	-1.95 2.27 1.23	3.24
10	72.81 20.39 8.72	71.78 21.58 9.36	-1.02 1.19 0.64	1.7
11	76.02 16.65 6.7	74.61 18.29 7.58	-1.4 1.63 0.88	2.33
12	79.23 12.92 4.68	78.29 14.02 5.28	-0.94 1.1 0.59	1.57
13	82.45 9.19 2.67	81.82 9.91 3.06	-0.61 0.73 0.39	1.03
14	85.66 5.46 0.65	85.26 5.92 0.9	-0.39 0.46 0.25	0.66
15	88.88 1.72 -1.35	88.39 2.28 -1.05	-0.47 0.56 0.3	0.8
16	92.09 -2.0 -3.37	92.09 -2.0 -3.37	0.0 0.0 0.0	0.01
17	43.88 53.98 26.86	43.88 53.98 26.86	0.0 0.0 0.0	0.01
18	55.93 39.98 19.3	56.23 39.64 19.12	0.29 -0.33 -0.17	0.48
19	67.99 25.99 11.74	65.81 28.51 13.1	-2.16 2.52 1.36	3.59
20	80.04 11.99 4.18	79.17 12.99 4.72	-0.86 1.01 0.54	1.44
21	92.09 -2.0 -3.37	92.09 -2.0 -3.37	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.09 - 43.88$
Regularity
 $g^* = 71.8$
Lightness gamut rel. to offset
 $f^* = 62.3$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 1.3$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.1$
Mean colour reproduction index: $R^*_{ab,m} = 94$

Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS

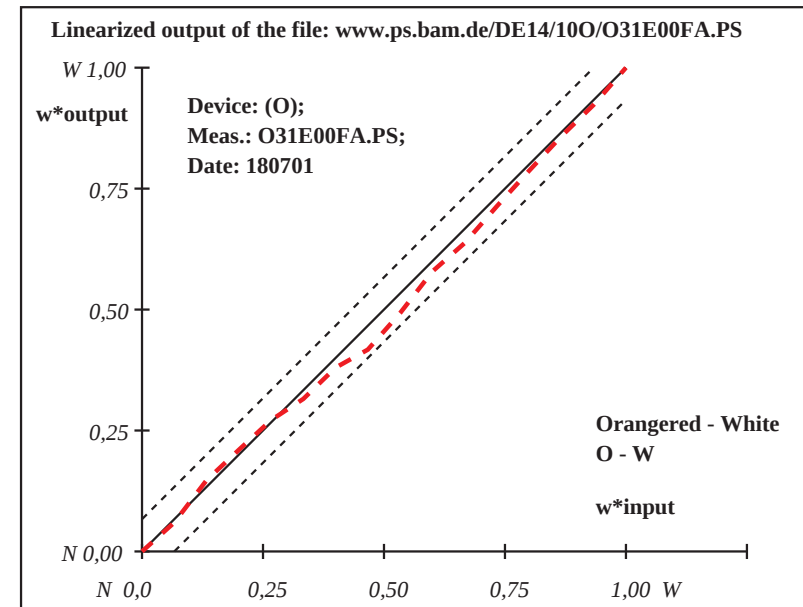

Device: (O); Meas.: O31E00FA.PS; Date: 180701


www.ps.bam.de/DE14/100/O31E00FA.PS

Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	49.22 -63.49 28.5	49.22 -63.49 28.5	0.0 0.0 0.0	0.01
2	52.08 -59.41 26.32	51.61 -60.08 26.68	-0.46 -0.66 0.36	0.89
3	54.93 -55.33 24.14	53.13 -57.9 25.52	-1.79 -2.56 1.38	3.43
4	57.79 -51.25 21.96	54.56 -55.86 24.42	-3.22 -4.6 2.46	6.14
5	60.65 -47.17 19.78	56.71 -52.79 22.78	-3.93 -5.61 3.0	7.49
6	63.51 -43.09 17.6	58.58 -50.12 21.36	-4.92 -7.03 3.76	9.37
7	66.36 -39.01 15.42	60.42 -47.49 19.96	-5.93 -8.48 4.53	11.31
8	69.22 -34.93 13.24	63.14 -43.61 17.88	-6.07 -8.67 4.64	11.57
9	72.08 -30.84 11.07	64.79 -41.25 16.62	-7.28 -10.4 5.56	13.87
10	74.94 -26.76 8.89	68.62 -35.78 13.7	-6.31 -9.01 4.82	12.02
11	77.79 -22.68 6.71	72.49 -30.26 10.75	-5.3 -7.57 4.05	10.1
12	80.65 -18.6 4.53	77.44 -23.19 6.98	-3.2 -4.58 2.45	6.11
13	83.51 -14.52 2.35	80.83 -18.35 4.39	-2.67 -3.82 2.04	5.1
14	86.37 -10.44 0.17	84.38 -13.27 1.68	-1.97 -2.82 1.51	3.77
15	89.22 -6.36 -2.0	88.58 -7.28 -1.51	-0.64 -0.91 0.49	1.23
16	92.08 -2.28 -4.18	92.08 -2.28 -4.18	0.0 0.0 0.0	0.01
17	49.22 -63.49 28.5	49.22 -63.49 28.5	0.0 0.0 0.0	0.01
18	59.94 -48.19 20.33	56.18 -53.56 23.19	-3.75 -5.36 2.87	7.15
19	70.65 -32.89 12.16	63.97 -42.43 17.25	-6.67 -9.54 5.1	12.72
20	81.37 -17.58 3.98	78.29 -21.98 6.33	-3.07 -4.39 2.35	5.86
21	92.08 -2.28 -4.18	92.08 -2.28 -4.18	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 72$				

Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

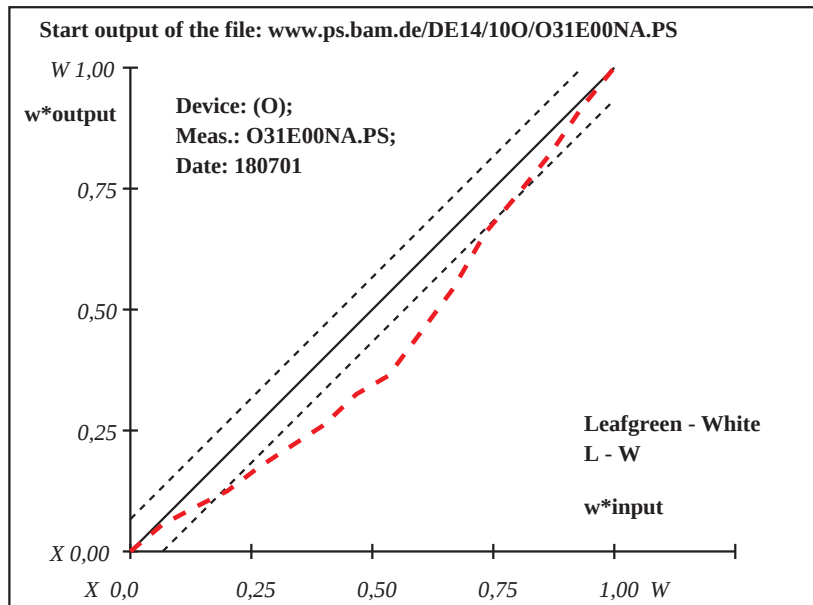


Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	47.37 -62.79 27.54	47.37 -62.79 27.54	0.0 0.0 0.0	0.01
2	50.37 -58.76 25.5	54.31 -53.46 22.82	3.94 5.29 -2.67	7.12
3	53.37 -54.73 23.46	57.28 -49.47 20.79	3.91 5.25 -2.65	7.07
4	56.37 -50.7 21.41	59.0 -47.16 19.62	2.63 3.53 -1.78	4.76
5	59.36 -46.66 19.37	60.92 -44.58 18.31	1.55 2.09 -1.05	2.81
6	62.36 -42.63 17.33	62.73 -42.14 17.08	0.37 0.49 -0.24	0.66
7	65.36 -38.6 15.29	65.21 -38.8 15.39	-0.14 -0.19 0.1	0.27
8	68.36 -34.57 13.25	68.43 -34.48 13.2	0.07 0.09 -0.04	0.12
9	71.36 -30.54 11.2	71.62 -30.19 11.03	0.26 0.35 -0.17	0.47
10	74.36 -26.51 9.16	74.93 -25.73 8.77	0.58 0.77 -0.38	1.04
11	77.36 -22.48 7.12	77.37 -22.47 7.11	0.01 0.01 0.0	0.02
12	80.36 -18.45 5.08	79.45 -19.66 5.69	-0.89 -1.2 0.62	1.63
13	83.35 -14.41 3.04	82.26 -15.89 3.78	-1.08 -1.46 0.75	1.98
14	86.35 -10.38 0.99	86.18 -10.61 1.11	-0.16 -0.22 0.12	0.31
15	89.35 -6.35 -1.04	89.3 -6.43 -1.0	-0.05 -0.07 0.04	0.1
16	92.35 -2.32 -3.08	92.35 -2.32 -3.08	0.0 0.0 0.0	0.01
17	47.37 -62.79 27.54	47.37 -62.79 27.54	0.0 0.0 0.0	0.01
18	58.62 -47.67 19.88	60.44 -45.22 18.64	1.82 2.45 -1.23	3.3
19	69.86 -32.55 12.23	70.02 -32.33 12.11	0.16 0.22 -0.1	0.3
20	81.1 -17.44 4.57	80.15 -18.72 5.22	-0.94 -1.27 0.65	1.72
21	92.35 -2.32 -3.08	92.35 -2.32 -3.08	0.0 0.0 0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 93$				

Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS

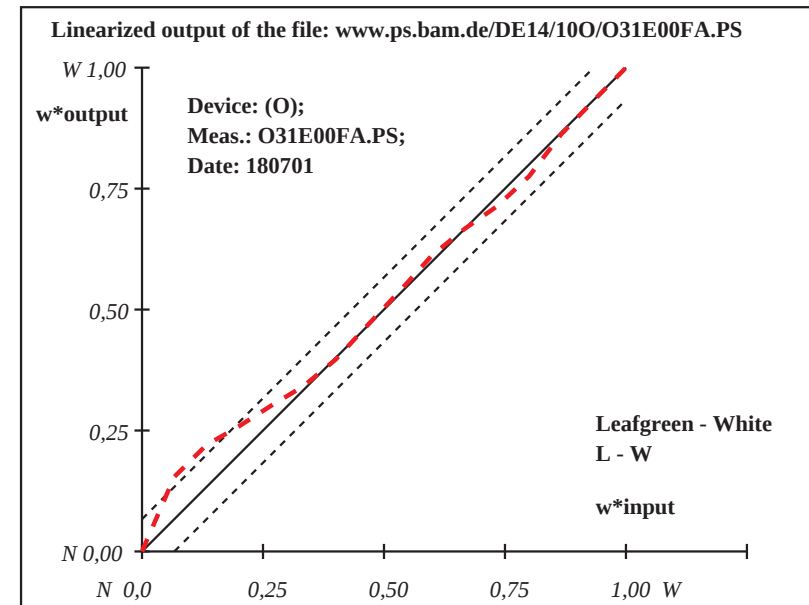


Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*
1	27.11	11.98	-26.04	27.11	11.98	-26.04	0.0	0.0	0.0	0.01
2	31.43	11.04	-24.59	27.92	11.8	-25.77	-3.5	0.76	-1.17	3.78
3	35.76	10.11	-23.15	28.98	11.58	-25.42	-6.77	1.47	-2.26	7.3
4	40.08	9.17	-21.7	30.33	11.28	-24.96	-9.74	2.11	-3.25	10.5
5	44.4	8.23	-20.25	31.93	10.93	-24.42	-12.46	2.7	-4.16	13.42
6	48.72	7.3	-18.8	32.61	10.79	-24.2	-16.1	3.49	-5.38	17.34
7	53.05	6.36	-17.36	37.14	9.81	-22.68	-15.9	3.45	-5.32	17.12
8	57.37	5.42	-15.91	40.49	9.08	-21.56	-16.87	3.66	-5.64	18.17
9	61.69	4.49	-14.46	47.34	7.6	-19.27	-14.34	3.11	-4.8	15.45
10	66.01	3.55	-13.01	53.82	6.19	-17.1	-12.18	2.64	-4.07	13.13
11	70.34	2.61	-11.57	59.64	4.93	-15.15	-10.69	2.32	-3.57	11.52
12	74.66	1.68	-10.12	66.75	3.39	-12.77	-7.9	1.71	-2.64	8.51
13	78.98	0.74	-8.67	74.53	1.7	-10.16	-4.44	0.96	-1.48	4.79
14	83.3	-0.19	-7.22	83.33	-0.19	-7.22	0.03	0.0	0.01	0.03
15	87.63	-1.12	-5.78	88.48	-1.31	-5.49	0.85	-0.17	0.29	0.92
16	91.95	-2.06	-4.33	91.95	-2.06	-4.33	0.0	0.0	0.0	0.01
17	27.11	11.98	-26.04	27.11	11.98	-26.04	0.0	0.0	0.0	0.01
18	43.32	8.47	-20.61	31.53	11.02	-24.56	-11.78	2.55	-3.94	12.69
19	59.53	4.96	-15.19	43.91	8.34	-20.41	-15.61	3.38	-5.22	16.81
20	75.74	1.44	-9.76	68.7	2.97	-12.12	-7.03	1.53	-2.35	7.58
21	91.95	-2.06	-4.33	91.95	-2.06	-4.33	0.0	0.0	0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 61$										

Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

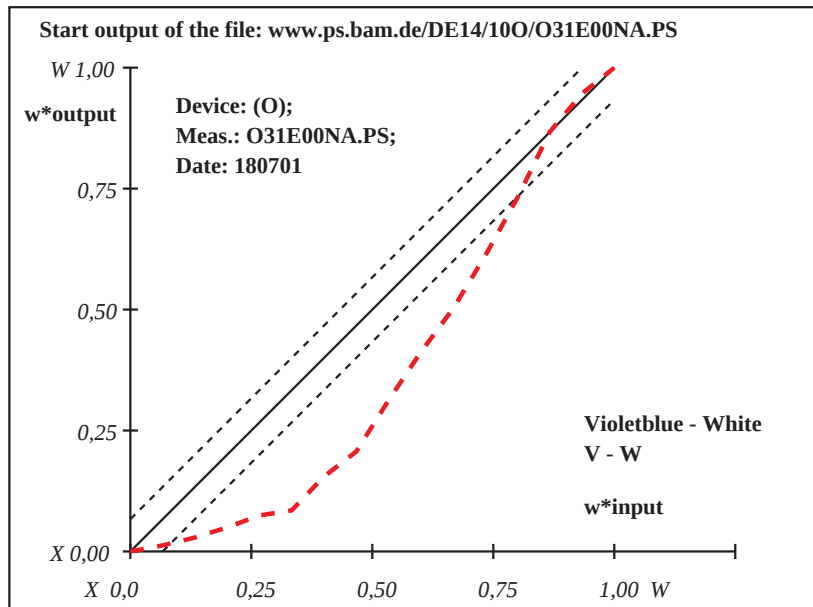


Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

i	LAB*ref			LAB*out, relative			LAB*out/c-ref			ΔE^*
1	25.97	12.87	-24.54	25.97	12.87	-24.54	0.0	0.0	0.0	0.01
2	30.39	11.81	-23.1	29.85	11.94	-23.27	-0.53	0.13	-0.17	0.59
3	34.82	10.76	-21.65	33.49	11.07	-22.09	-1.32	0.32	-0.42	1.43
4	39.24	9.7	-20.21	38.95	9.77	-20.31	-0.28	0.07	-0.08	0.31
5	43.67	8.64	-18.77	42.54	8.91	-19.14	-1.12	0.27	-0.36	1.22
6	48.09	7.58	-17.33	47.62	7.7	-17.48	-0.46	0.11	-0.14	0.51
7	52.51	6.53	-15.88	51.73	6.71	-16.14	-0.78	0.19	-0.25	0.85
8	56.94	5.47	-14.44	54.89	5.96	-15.11	-2.04	0.49	-0.66	2.21
9	61.36	4.41	-13.0	61.37	4.41	-13.0	0.01	0.0	0.0	0.01
10	65.79	3.35	-11.56	64.89	3.57	-11.85	-0.88	0.21	-0.28	0.96
11	70.21	2.3	-10.11	69.15	2.55	-10.46	-1.05	0.25	-0.34	1.15
12	74.63	1.24	-8.67	74.32	1.31	-8.77	-0.3	0.07	-0.09	0.33
13	79.06	0.18	-7.23	78.17	0.4	-7.52	-0.88	0.21	-0.28	0.96
14	83.48	-0.87	-5.79	82.35	-0.6	-6.15	-1.12	0.27	-0.36	1.22
15	87.91	-1.92	-4.34	88.06	-1.96	-4.29	0.15	-0.03	0.05	0.17
16	92.33	-2.98	-2.9	92.33	-2.98	-2.9	0.0	0.0	0.0	0.01
17	25.97	12.87	-24.54	25.97	12.87	-24.54	0.0	0.0	0.0	0.01
18	42.56	8.91	-19.13	41.64	9.12	-19.43	-0.91	0.22	-0.29	0.99
19	59.15	4.94	-13.72	58.13	5.18	-14.05	-1.01	0.24	-0.32	1.1
20	75.74	0.98	-8.31	75.28	1.08	-8.46	-0.45	0.11	-0.14	0.49
21	92.33	-2.98	-2.9	92.33	-2.98	-2.9	0.0	0.0	0.0	0.01
Mean colour reproduction index: $R^*_{ab,m} = 97$										

Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS

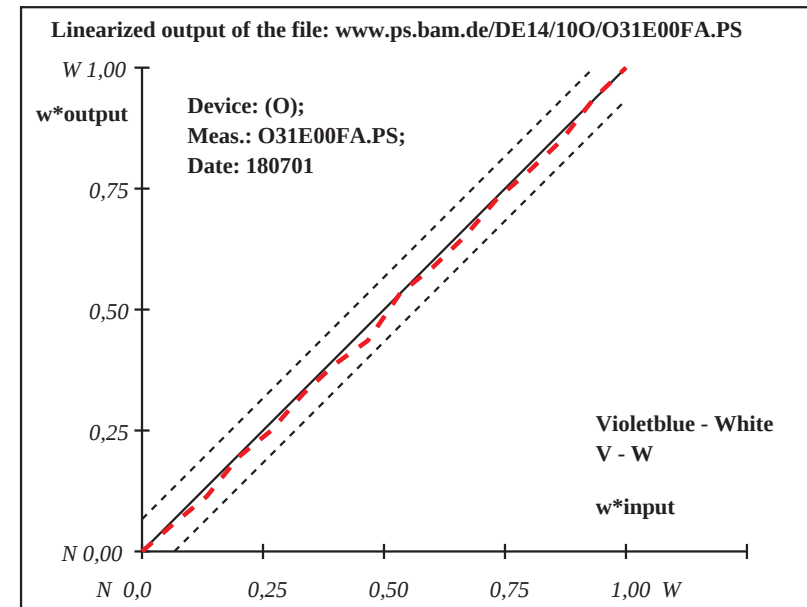

Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS


Output linearization of 16 colour steps according to ISO/IEC 15775; PS operator cmyn* setcmykcolor

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	28.61 -5.37 4.78	28.61 -5.37 4.78	0.0 0.0 0.0	0.01
2	32.83 -5.16 4.2	29.64 -5.32 4.64	-3.17 -0.15 0.44	3.22
3	37.04 -4.95 3.61	29.67 -5.32 4.63	-7.36 -0.35 1.02	7.45
4	41.26 -4.75 3.03	29.8 -5.31 4.62	-11.45 -0.56 1.59	11.58
5	45.47 -4.54 2.44	30.82 -5.26 4.47	-14.64 -0.71 2.03	14.81
6	49.69 -4.33 1.86	32.12 -5.2 4.29	-17.55 -0.86 2.43	17.75
7	53.9 -4.12 1.28	33.96 -5.11 4.04	-19.93 -0.97 2.76	20.16
8	58.12 -3.91 0.69	36.09 -5.0 3.74	-22.02 -1.08 3.05	22.27
9	62.33 -3.71 0.11	42.41 -4.69 2.87	-19.91 -0.97 2.76	20.13
10	66.55 -3.5 -0.47	49.59 -4.33 1.87	-16.95 -0.83 2.35	17.14
11	70.76 -3.29 -1.05	56.85 -3.98 0.87	-13.9 -0.68 1.93	14.06
12	74.98 -3.08 -1.63	66.02 -3.52 -0.39	-8.95 -0.43 1.24	9.06
13	79.19 -2.87 -2.22	74.15 -3.12 -1.52	-5.04 -0.24 0.7	5.1
14	83.41 -2.67 -2.8	82.77 -2.7 -2.71	-0.62 -0.02 0.09	0.64
15	87.62 -2.46 -3.39	88.28 -2.43 -3.48	0.65 0.03 -0.08	0.66
16	91.84 -2.25 -3.97	91.84 -2.25 -3.97	0.0 0.0 0.0	0.01
17	28.61 -5.37 4.78	28.61 -5.37 4.78	0.0 0.0 0.0	0.01
18	44.42 -4.59 2.59	30.56 -5.27 4.51	-13.84 -0.67 1.92	14.0
19	60.23 -3.81 0.4	39.25 -4.84 3.31	-20.96 -1.02 2.91	21.2
20	76.03 -3.03 -1.78	68.05 -3.42 -0.67	-7.97 -0.38 1.11	8.07
21	91.84 -2.25 -3.97	91.84 -2.25 -3.97	0.0 0.0 0.0	0.01

Start output S1
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 91.84 - 28.61$
Regularity
 $g^* = 6.8$
Lightness gamut rel. to offset
 $f^* = 81.7$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 10.3$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 8.7$
Mean colour reproduction index: $R^*_{ab,m} = 55$

Device: (O); Meas.: O31E00NA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00NA.PS

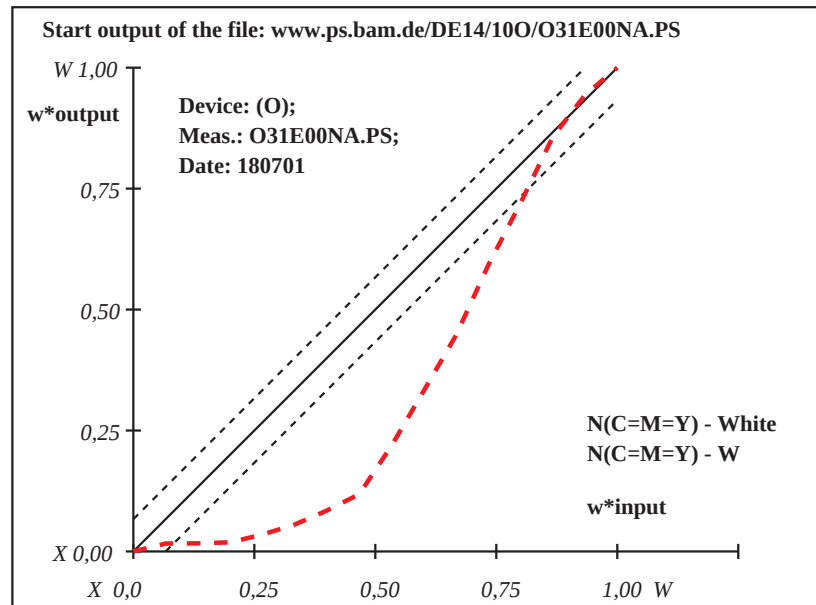

Device: (O); Meas.: O31E00NA.PS; Date: 180701


www.ps.bam.de/DE14/100/O31E00NA.PS

i	LAB*ref	LAB*out, relative	LAB*out/c-ref	ΔE^*
1	28.32 -6.89 6.1	28.32 -6.89 6.1	0.0 0.0 0.0	0.01
2	32.59 -6.63 5.48	37.35 -6.33 4.8	4.76 0.29 -0.68	4.82
3	36.86 -6.36 4.87	40.74 -6.12 4.31	3.89 0.24 -0.55	3.93
4	41.13 -6.1 4.25	45.21 -5.84 3.66	4.08 0.25 -0.58	4.13
5	45.39 -5.83 3.63	47.95 -5.67 3.26	2.56 0.16 -0.36	2.59
6	49.66 -5.57 3.02	51.88 -5.43 2.7	2.22 0.14 -0.31	2.25
7	53.93 -5.3 2.4	56.99 -5.11 1.96	3.05 0.19 -0.43	3.09
8	58.2 -5.04 1.78	60.25 -4.91 1.49	2.05 0.13 -0.29	2.08
9	62.47 -4.77 1.17	66.16 -4.54 0.63	3.69 0.23 -0.52	3.73
10	66.74 -4.51 0.55	70.92 -4.25 -0.04	4.18 0.26 -0.59	4.23
11	71.01 -4.24 -0.06	74.26 -4.04 -0.53	3.25 0.2 -0.46	3.29
12	75.28 -3.98 -0.67	77.79 -3.82 -1.04	2.51 0.16 -0.35	2.54
13	79.54 -3.71 -1.29	81.39 -3.6 -1.56	1.84 0.11 -0.26	1.87
14	83.81 -3.45 -1.91	86.15 -3.3 -2.24	2.34 0.15 -0.33	2.37
15	88.08 -3.18 -2.52	89.41 -3.1 -2.71	1.33 0.08 -0.18	1.34
16	92.35 -2.92 -3.14	92.35 -2.92 -3.14	0.0 0.0 0.0	0.01
17	28.32 -6.89 6.1	28.32 -6.89 6.1	0.0 0.0 0.0	0.01
18	44.33 -5.9 3.79	47.27 -5.72 3.36	2.94 0.18 -0.41	2.98
19	60.34 -4.91 1.47	63.21 -4.73 1.06	2.87 0.18 -0.4	2.91
20	76.34 -3.91 -0.83	78.69 -3.77 -1.17	2.34 0.15 -0.33	2.37
21	92.35 -2.92 -3.14	92.35 -2.92 -3.14	0.0 0.0 0.0	0.01

Linearized output S2
Specification according to ISO/IEC 15775 Annex G and DIN 33866-1 Annex G
relative CIELAB data used for "out"
 $\Delta L^* = 92.35 - 28.32$
Regularity
 $g^* = 72.1$
Lightness gamut rel. to offset
 $f^* = 82.7$
 ΔL^* -gray variation
 $v^* = 0.0$
Mean CIELAB difference (16 steps)
 $\Delta E^*_{CIELAB} = 2.6$
Mean CIELAB difference (5 steps)
 $\Delta L^*_{CIELAB} = 1.7$
Mean colour reproduction index: $R^*_{ab,m} = 89$

Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS

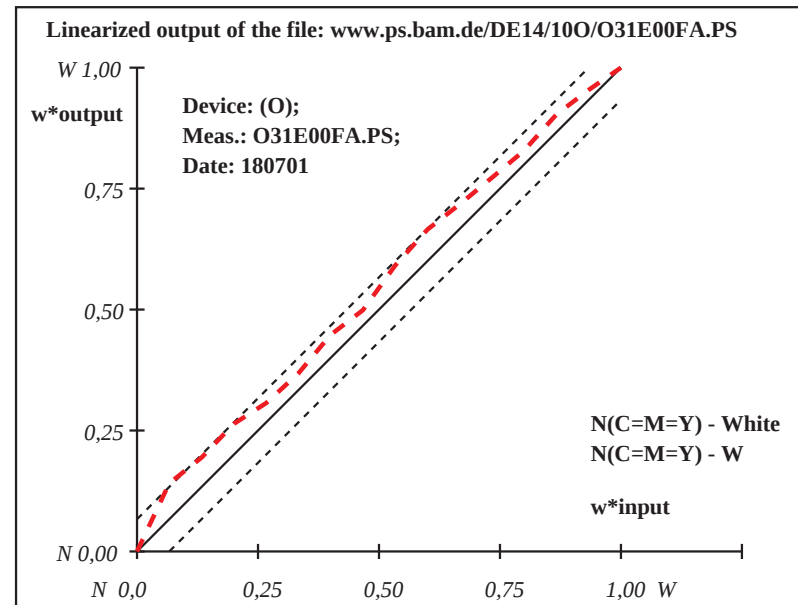

Device: (O); Meas.: O31E00FA.PS; Date: 180701

www.ps.bam.de/DE14/100/O31E00FA.PS