




See for similar files: <http://www.ps.bam.de/DE80/DE80.HTM>
 Information and Order: <http://www.ps.bam.de>

Version 2.0, io=m,6; iORS; oORS, CIELAB





www.ps.bam.de/DE80/100/O80E06FP.PS/.PDF; linearized output
 F: Output Linearization (OL) data DE80/100/O80E06FP.DAT in File (F)




BAM registration: 20030101-DE80/100/O80E06FP.PS/.PDF
 application for monitors and printers


BAM material: code=rha4ta

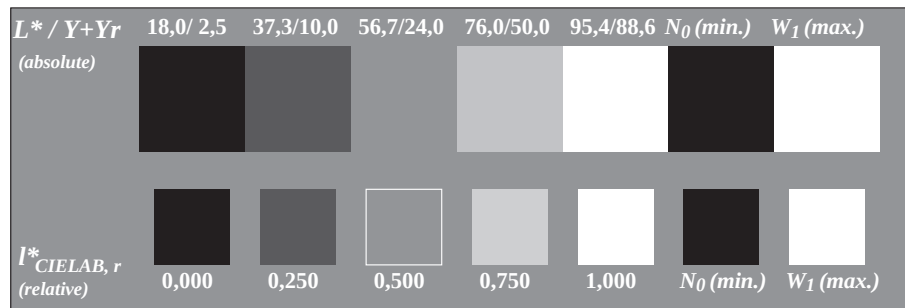


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; Use of the PS operator `000n* setcmykcolor`

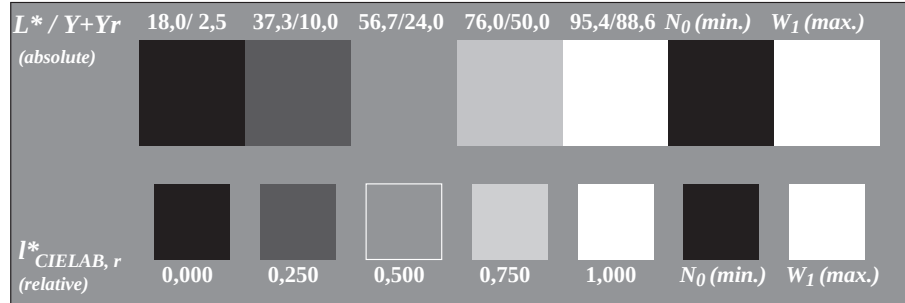

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; Use of the PS operator `w* setgray`

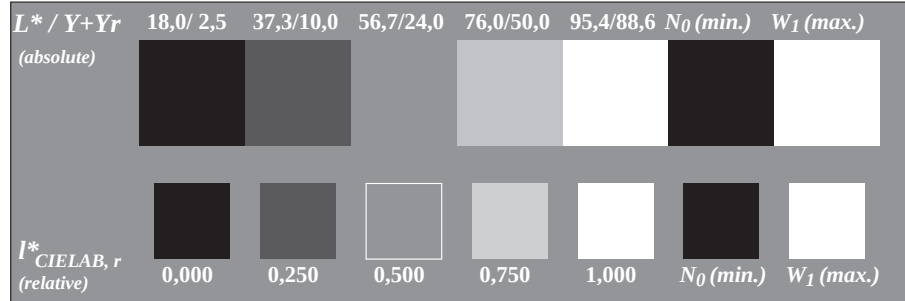

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; Use of the PS operator `nnn0* setcmykcolor`

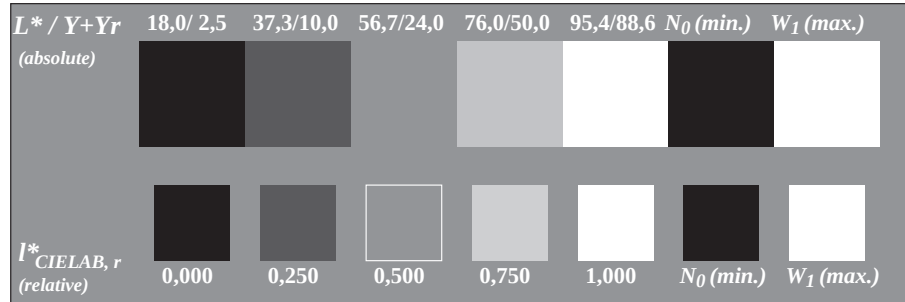

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; Use of the PS operator `www* setrgbcolor`



Fig. C2 of ISO/IEC-test chart no. 3;

ISO/IEC 15775 and input: mixture (m) of PS operators
 DIS ISO/IEC 19839-X; output: `000n* setcmykcolor`

