



See for similar files: <http://www.ps.bam.de/DE81/100/O81E00FP.PS/.PDF>
Information and Order: <http://www.ps.bam.de>

Version 2.0, io=m,0; iORS; oORS, CIELAB




www.ps.bam.de/DE81/100/O81E00FP.PS/.PDF; linearized output
F: Output Linearization (OL) data DE81/100/O81E00FP.DAT in File (F)




BAM registration: 20030101-DE81/100/O81E00FP.PS/.PDF
application for monitors and printers


BAM material: code=rha4ta

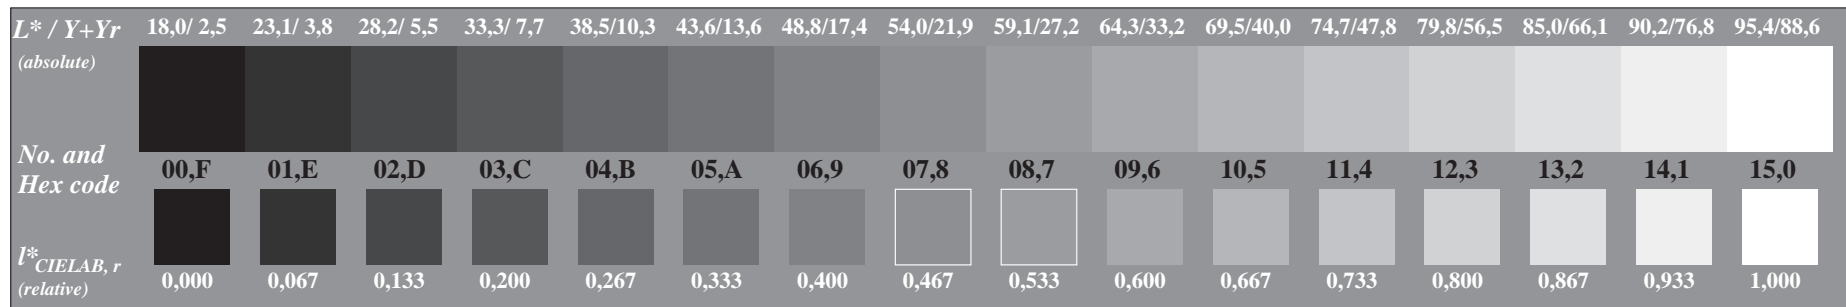


Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator $000n^*setcmykcolor$

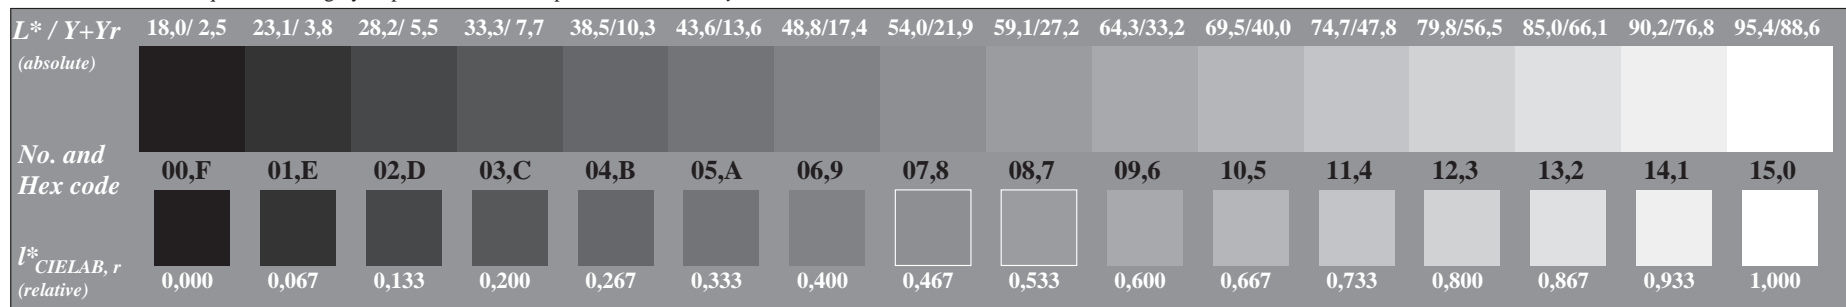

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator $w^*setgray$

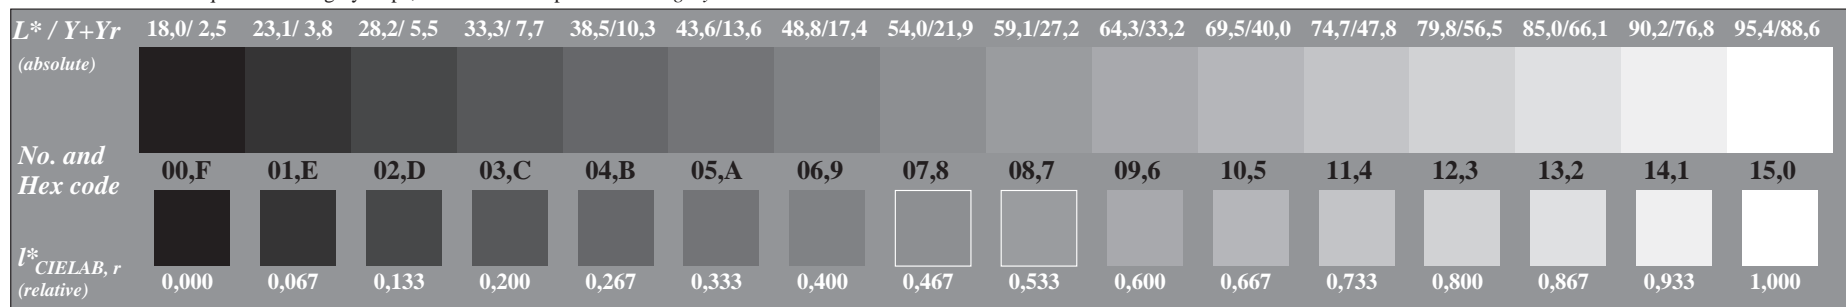

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator $nnn0^*setcmykcolor$

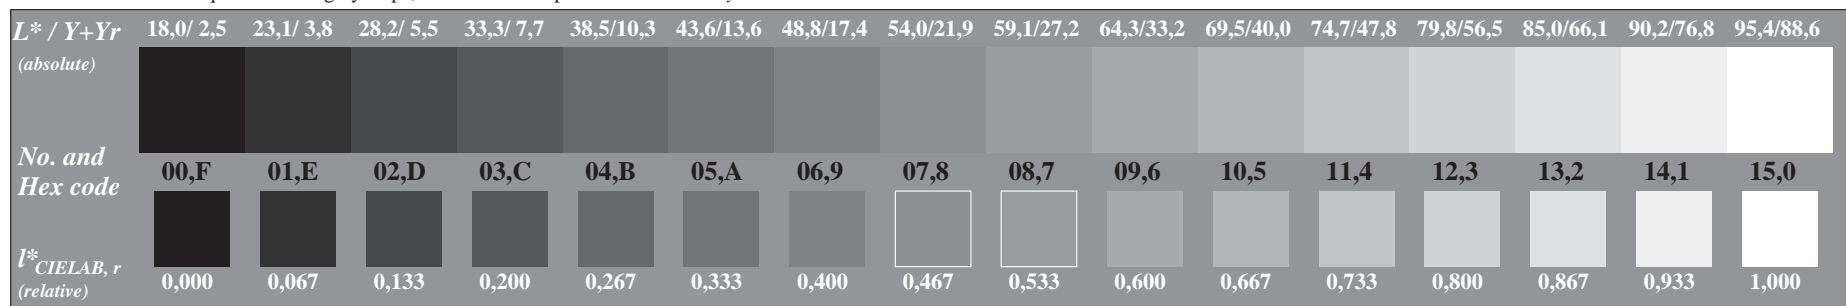

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator $www^*setrgbcolor$



Fig. C3 of ISO/IEC-test chart no. 3;

ISO/IEC 15775 and input: mixture (m) of PS operators
DIS ISO/IEC 19839-X; output: $cmy0^*/000n^*setcmykcolor$

