




See for similar files: <http://www.ps.bam.de/DE81/100/O81E12SP.PS/.PDF>;
Information and Order: <http://www.ps.bam.de/DE81/100/O81E12SP.PS/.PDF>
Version 2.0, io=m,m?





www.ps.bam.de/DE81/100/O81E12SP.PS/.PDF;
S: Output Linearization (OL) data DE81/100/O81E12SP.DAT in Distiller Startup (S) Directory




BAM registration: 20030101-DE81/100/O81E12SP.PS/.PDF
application for monitors and printers


BAM material: code=rha4ta

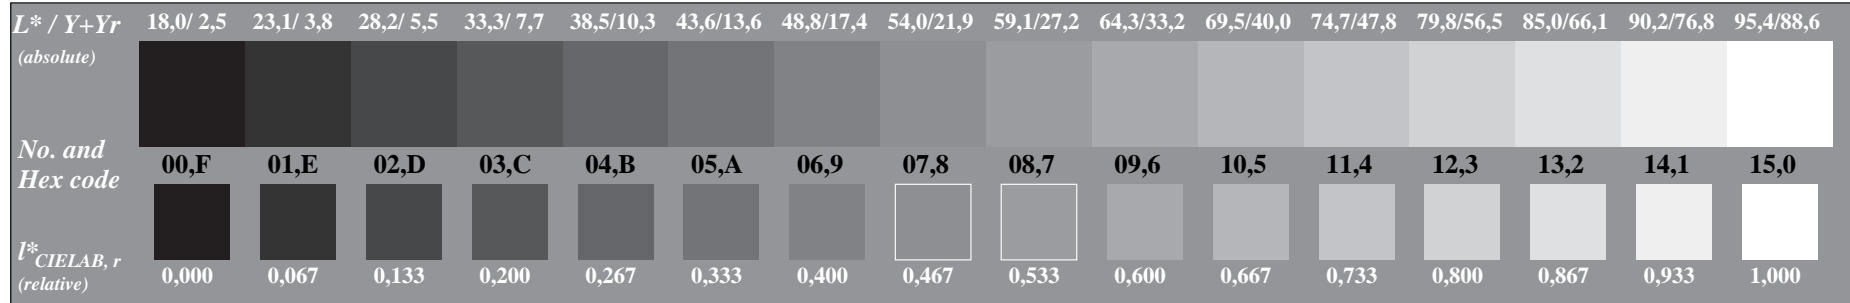


Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator 000n* setcmykcolor

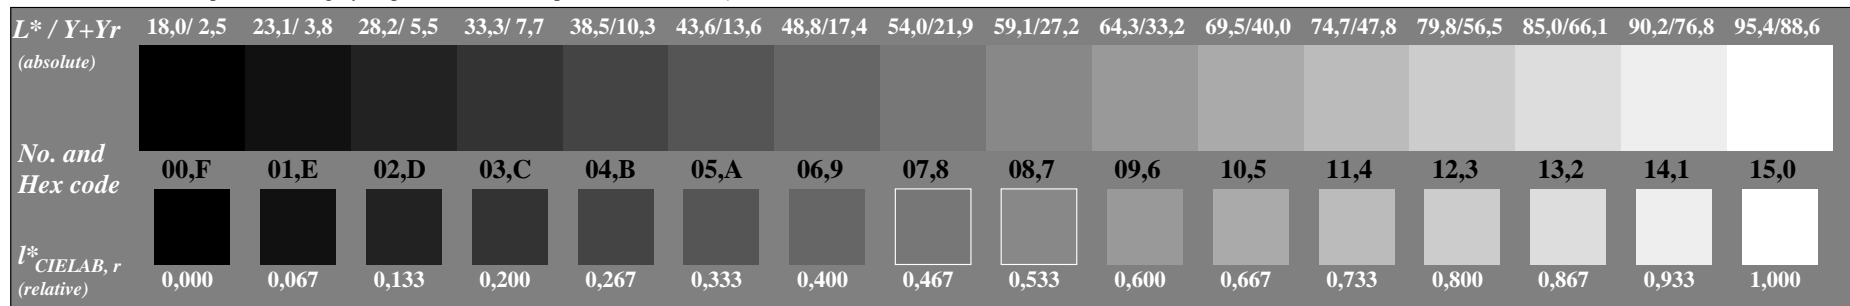

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator w* setgray

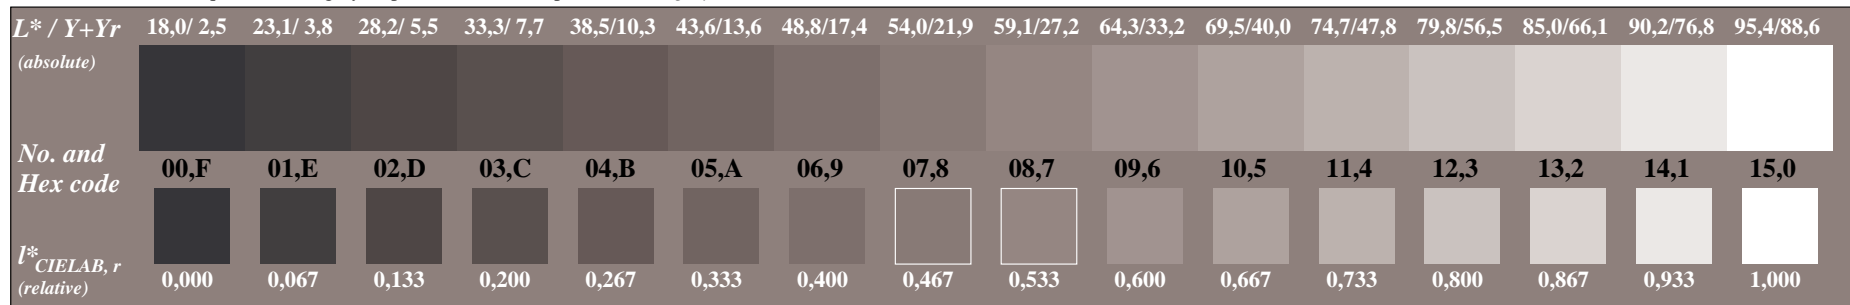

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator nnn0* setcmykcolor

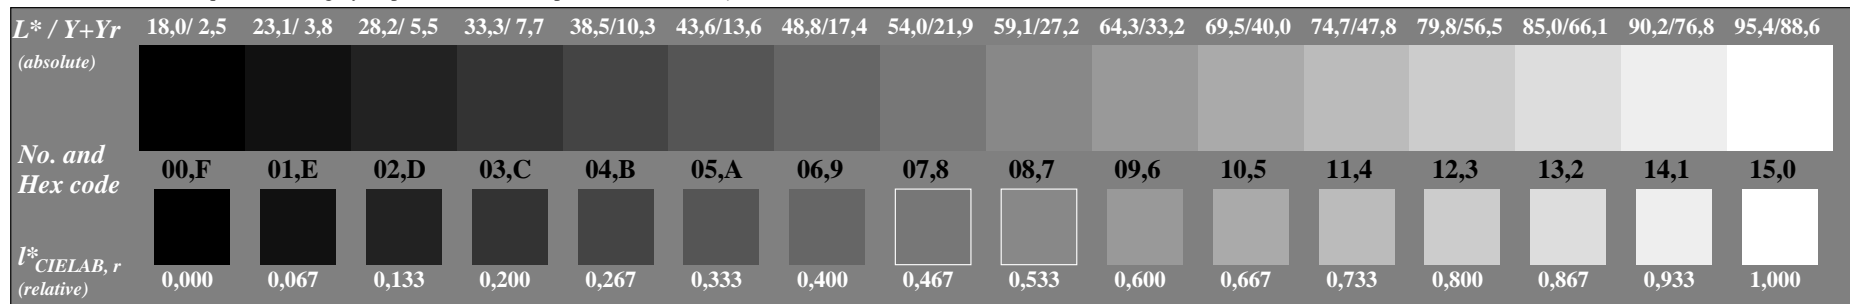

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator www* setrgbcolor



Fig. C3 of ISO/IEC-test chart no. 3;

ISO/IEC 15775 and input: mixture (m) of PS operators
DIS ISO/IEC 19839-X; output: Startup (S) data dependend

