

See for similar files: <http://www.ps.bam.de/DE81/DE81.HTM>
Information and Order: <http://www.ps.bam.de> Version 2.0, io=m,m

BAM registration: 20030101-DE81/10Q/Q81E13NP.PS/.PDF
application for monitors and printers


BAM material: code=rha4ta

www.ps.bam.de/DE81/10Q/Q81E13NP.PS/.PDF; start output


N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)




Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator w^* *setgray*

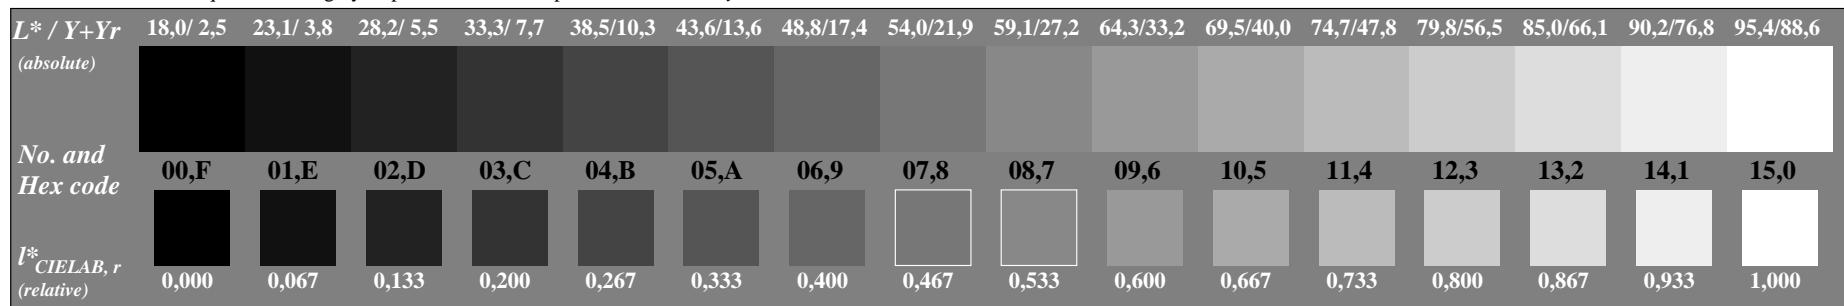

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator $nnn0^*$ *setcmykcolor*

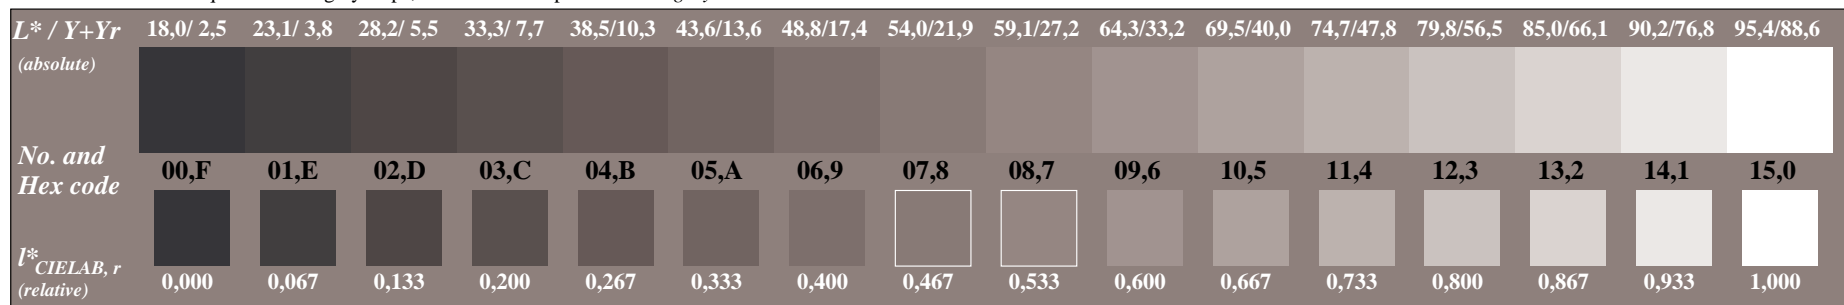

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator www^* *setrgbcolor*

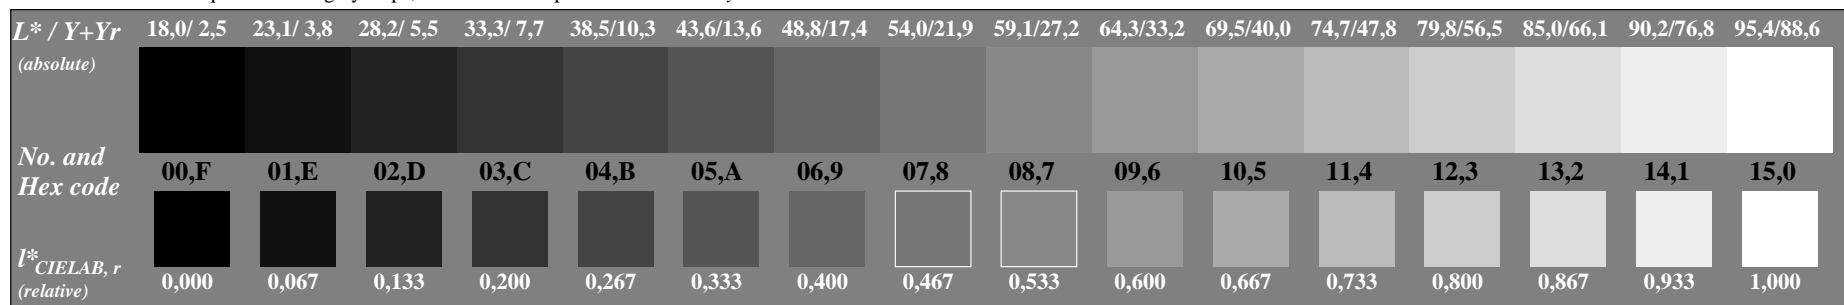

Picture C3: 16 visual equidistant L^* -grey steps; Use of the PS operator www^* *setrgbcolor*

Fig. C3 of ISO/IEC-test chart no. 3;

ISO/IEC 15775 and input: mixture (m) of PS operators
DIS ISO/IEC 19839-X; output: no change compared to input