




See for similar files: <http://www.ps.bam.de/DE81/10T/T81E02FP.PS/.PDF>  
Information and Order: <http://www.ps.bam.de>

Version 2.0, io=m,2; iORS; oORS, CIELAB





www.ps.bam.de/DE81/10T/T81E02FP.PS/.PDF; linearized output  
F: Output Linearization (OL) data DE81/10T/T81E02FP.DAT in File (F)




BAM registration: 20030101-DE81/10T/T81E02FP.PS/.PDF  
application for monitors and printers


BAM material: code=rha4ta

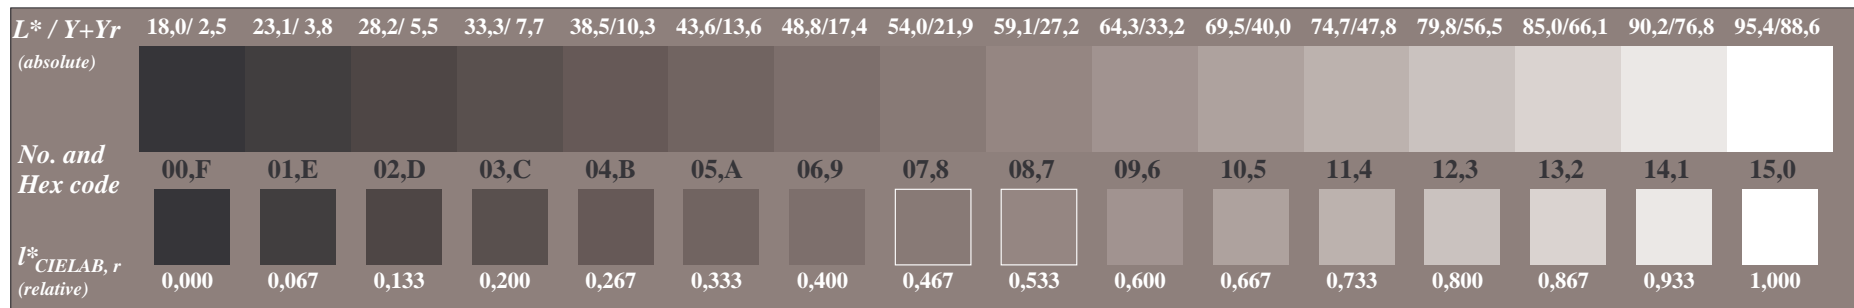


Picture C3: 16 visual equidistant  $L^*$ -grey steps; Use of the PS operator  $000n^*$  *setcmykcolor*

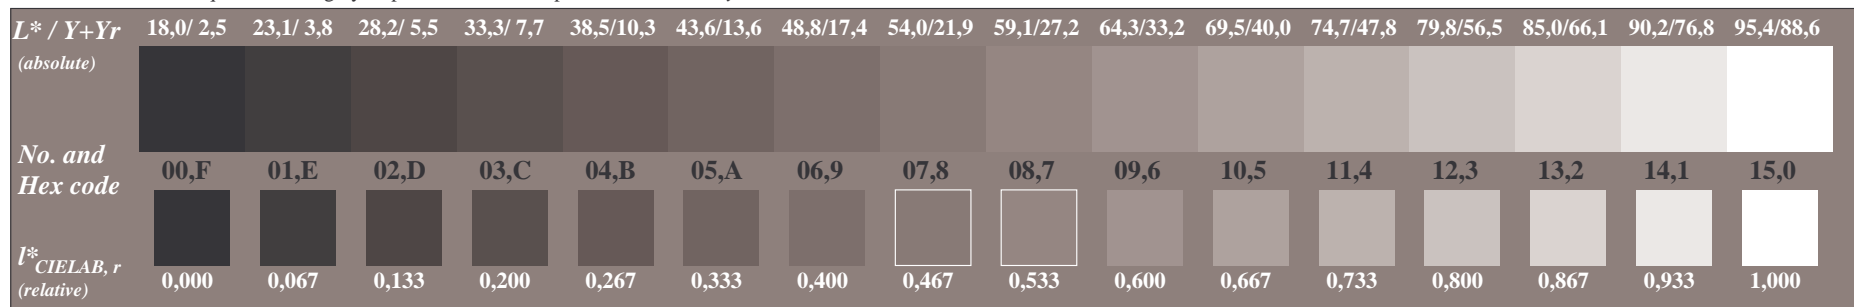

Picture C3: 16 visual equidistant  $L^*$ -grey steps; Use of the PS operator  $w^*$  *setgray*

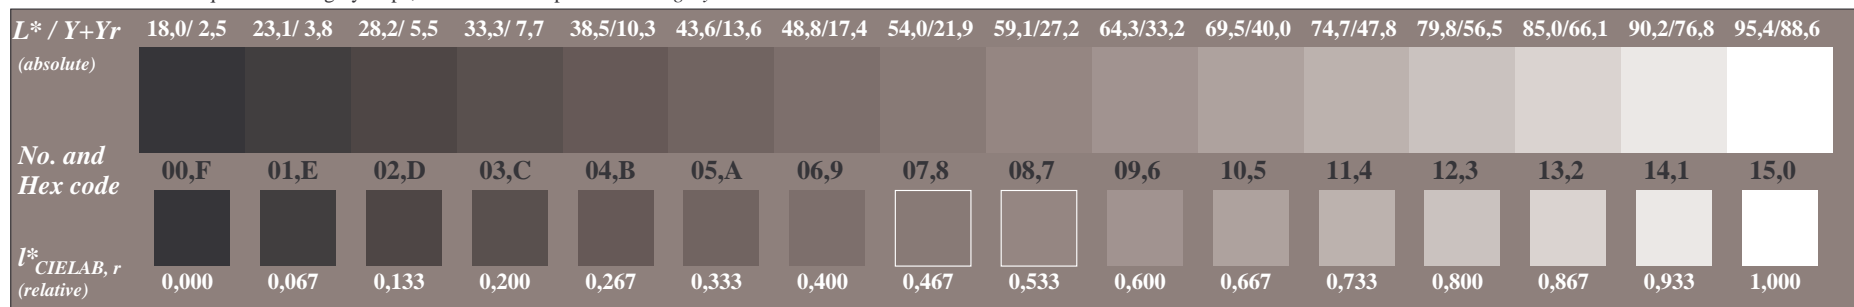

Picture C3: 16 visual equidistant  $L^*$ -grey steps; Use of the PS operator  $nnn0^*$  *setcmykcolor*

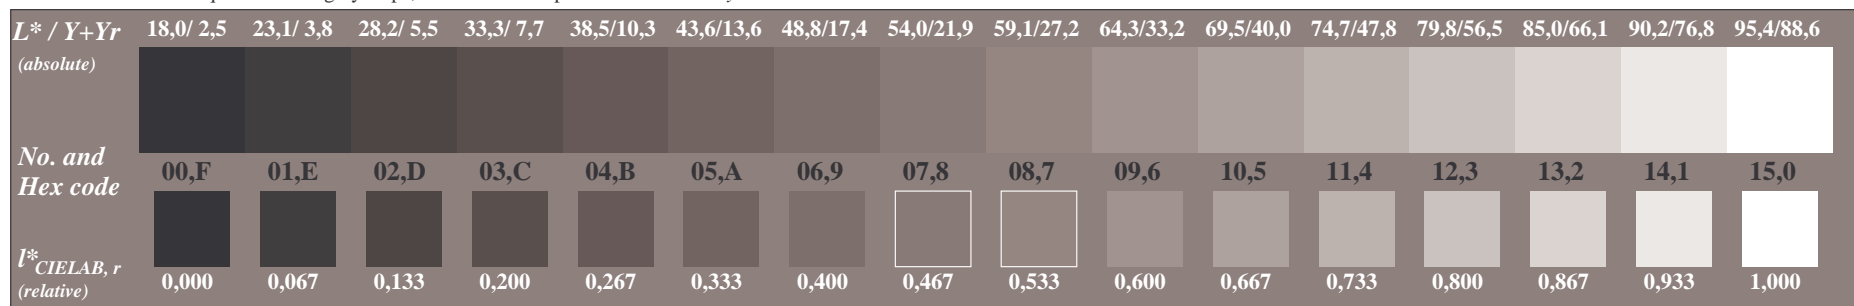

Picture C3: 16 visual equidistant  $L^*$ -grey steps; Use of the PS operator  $www^*$  *setrgbcolor*



Fig. C3 of ISO/IEC-test chart no. 3;

ISO/IEC 15775 and input: mixture (m) of PS operators  
DIS ISO/IEC 19839-X; output:  $cmy0^* / nnn0^*$  *setcmykcolor*

