




See for similar files: <http://www.ps.bam.de/DE82/DE82.HTM>
Information and Order: <http://www.ps.bam.de> Version 2.0, io=5,5

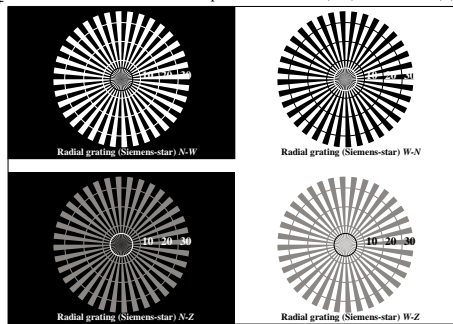

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; Use of the PS operator LAB* setcolor

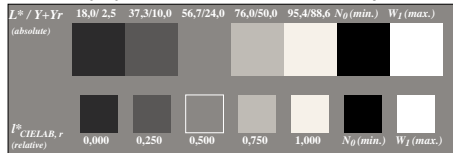


Picture C2: 5 visual equidistant L*-gray steps + N0 + W1; Use of the PS operator LAB* setcolor

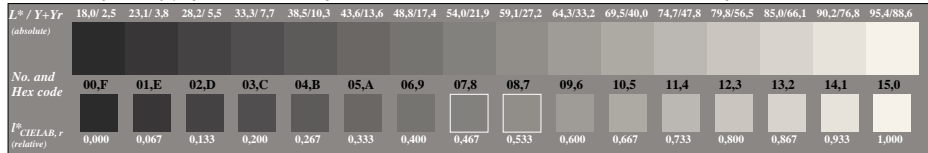


Picture C3: 16 visual equidistant L*-gray steps; Use of the PS operator LAB* setcolor

background step 0	Hex code	1 ring step	Hex code
7	E	8	F
2	8	0	6
8	F	6	D

Picture C4: Landolt-rings W-N; Use of the PS operator LAB* setcolor

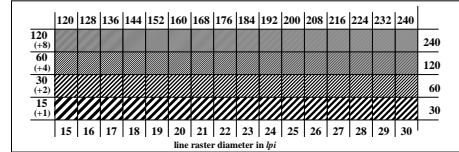

Picture C5: Line raster under 45° (or 135°); Use of the PS operator LAB* setcolor

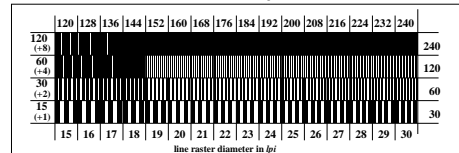

Picture C6: Line raster under 90° (or 0°); Use of the PS operator LAB* setcolor

Fig. C1 to C6 of ISO/IEC-test chart 3;

ISO/IEC 15775 and DIS ISO/IEC 19839-X; input: LAB* setcolor
input: LAB* setcolor
input: no change compared to input

BAM registration: 20030101-DE82/S82E00N1.PS.TXT
application for monitors and printers
BAM material: code=thata