




www.ps.bam.de/DE85/10L/L85E03NP.PS/.PDF; start output
N: No Output Linearization (OL) data in File (F), Startup (S) or Device (D)

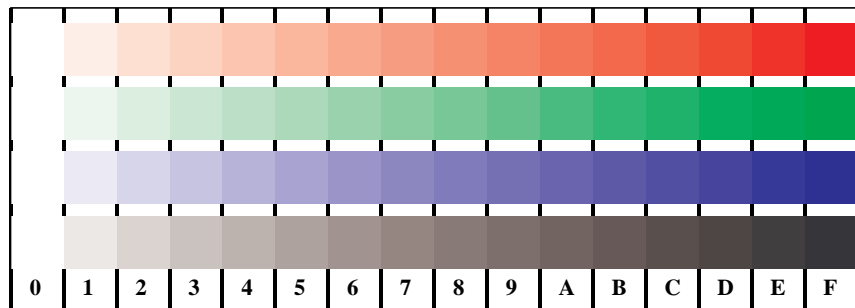


Picture D4: 16 equidistant steps **W-O**, **W-L**, **W-V** and **W-N**; Use of PS operator *cmy0* setcmykcolor* (only)

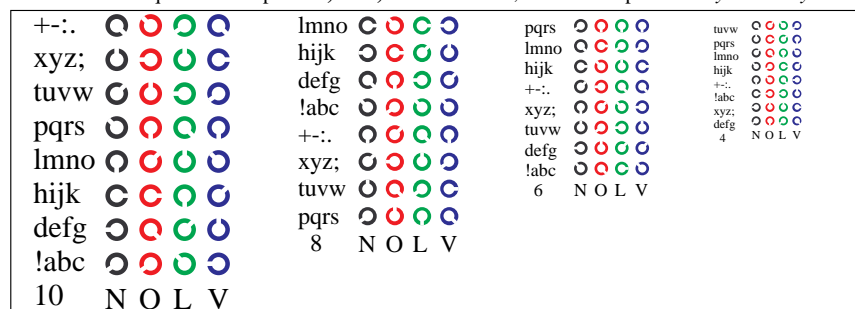

Picture D5: Script and Landolt-rings **N**, **O**, **L** and **V**; Use of PS operator *cmy0* setcmykcolor* (only)

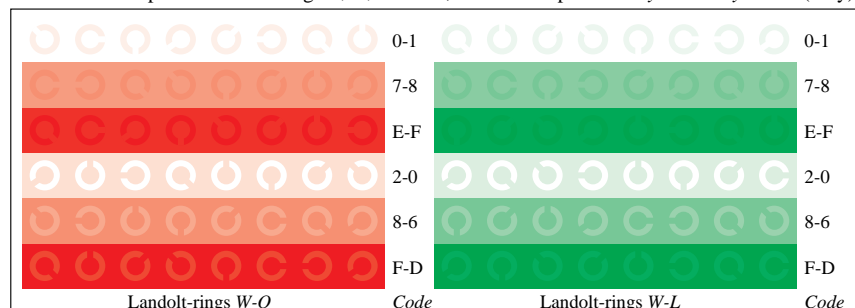


Picture D6: Landolt-rings **W-O** and **W-L**; Use of PS operator *cmy0* setcmykcolor* (only)

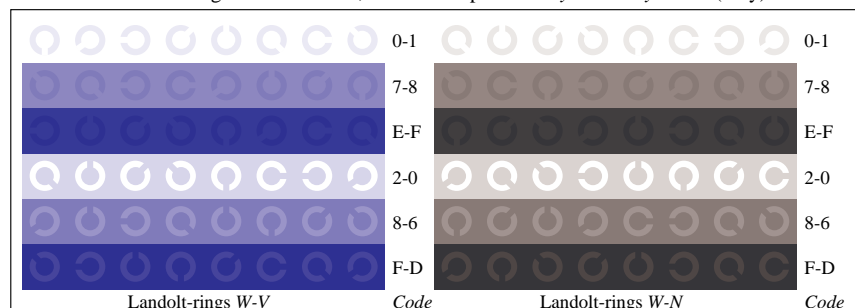

Picture D7: Landolt-rings **W-V** and **W-N**; Use of PS operator *cmy0* setcmykcolor* (only)

Fig. D4 to D7 of ISO/IEC-test chart 4;

ISO/IEC 15775 and input: mixture (m) of PS operators
DIS ISO/IEC 19839-X; output: no change compared to input



BAM registration: 20030101-DE85/10L/L85E03NP.PS/.PDF
application for monitors and printers

BAM material: code=rha4ta