




www.ps.bam.de/DE85/10T/T85E05SP.PS/.PDF;
S: Output Linearization (OL) data DE85/10T/T85E05SP.DAT in Distiller Startup (S) Directory

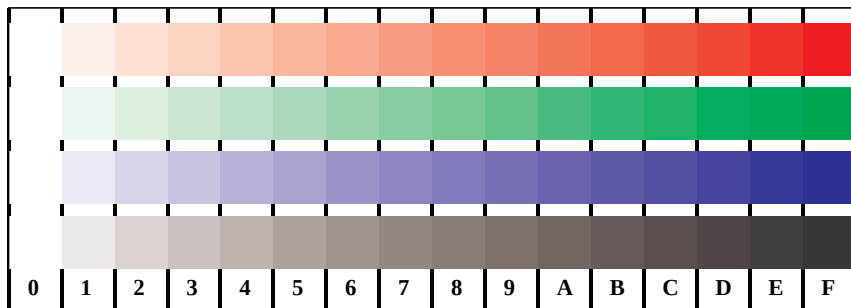


Picture D4: 16 equidistant steps W-O, W-L, W-V and W-N; Use of PS operator *cmy0* setcmykcolor* (only)

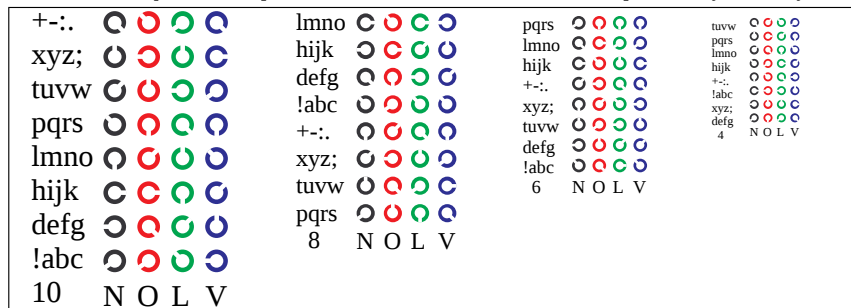

Picture D5: Script and Landolt-rings N, O, L and V; Use of PS operator *cmy0* setcmykcolor* (only)

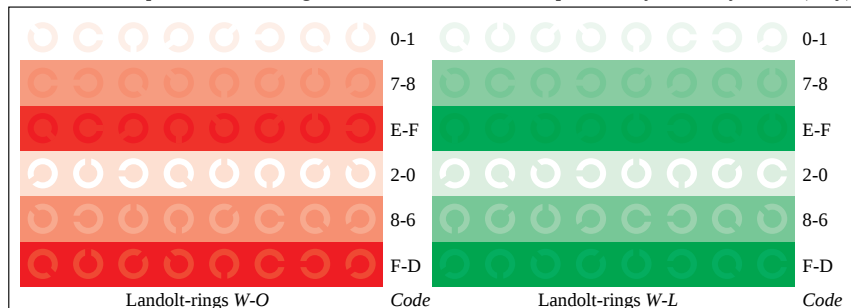


Picture D6: Landolt-rings W-O and W-L; Use of PS operator *cmy0* setcmykcolor* (only)

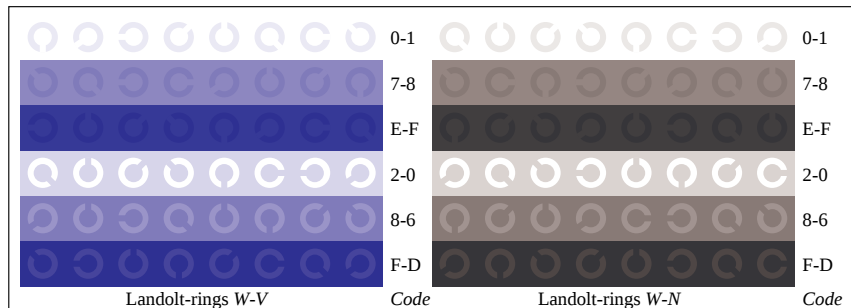


Picture D7: Landolt-rings W-V and W-N; Use of PS operator *cmy0* setcmykcolor* (only)

Fig. D4 to D7 of ISO/IEC-test chart 4;


ISO/IEC 15775 and input: mixture (m) of PS operators
DIS ISO/IEC 19839-X; output: *Startup (S) data depend*

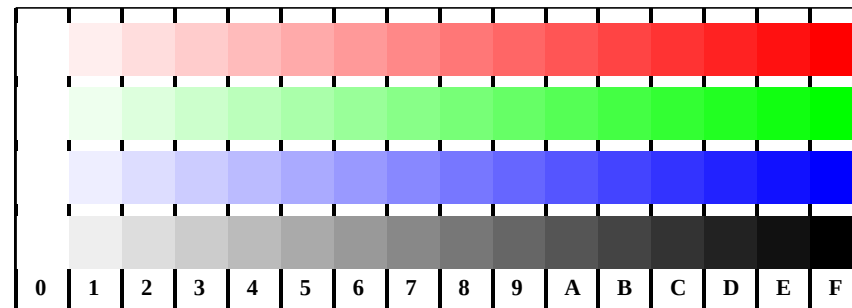


Picture D4: 16 equidistant steps W-O, W-L, W-V and W-N; Use of PS operator *olv* setrgbcolor* (only)

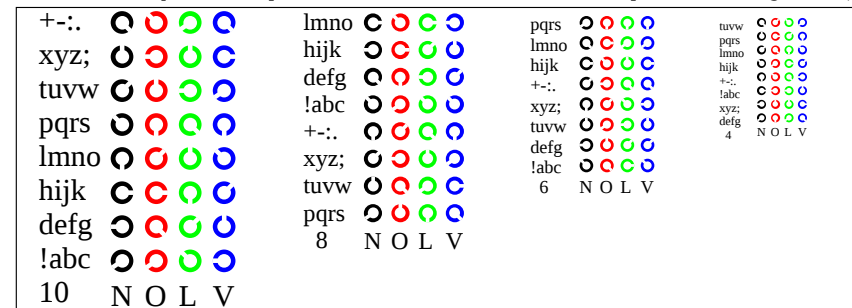

Picture D5: Script and Landolt-rings N, O, L and V; Use of PS operator *olv* setrgbcolor* (only)

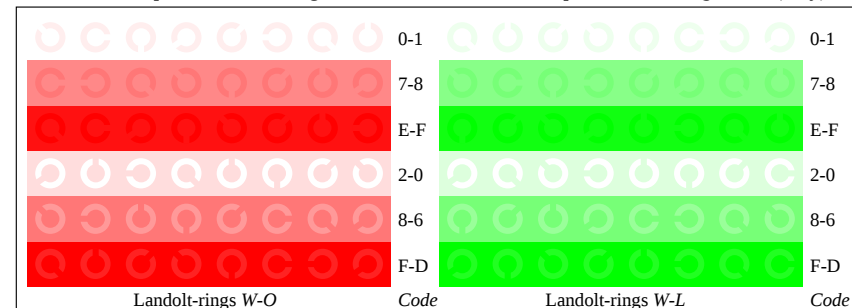

Picture D6: Landolt-rings W-O and W-L; Use of PS operator *olv* setrgbcolor* (only)

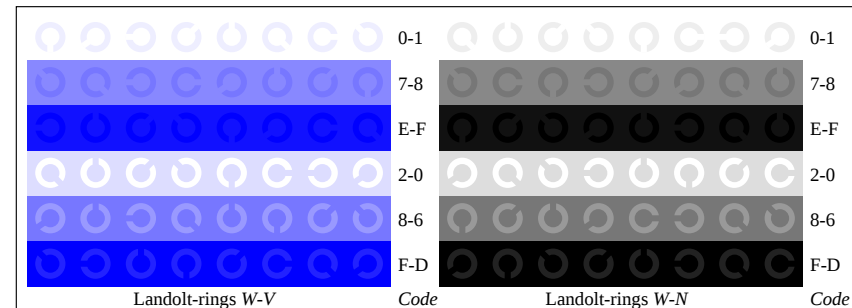

Picture D7: Landolt-rings W-V and W-N; Use of PS operator *olv* setrgbcolor* (only)

BAM registration: 20030101-DE85/10T/T85E05SP.PS/.PDF
application for monitors and printers

BAM material: code=rha4ta