



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $w^{\text{lin}} 1.0 \exp \text{ setgray}$

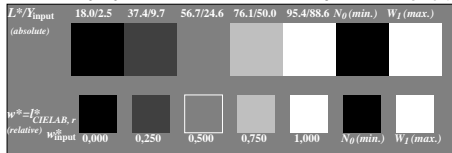


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: $w^{\text{lin}} 1.0 \exp \text{ setgray}$

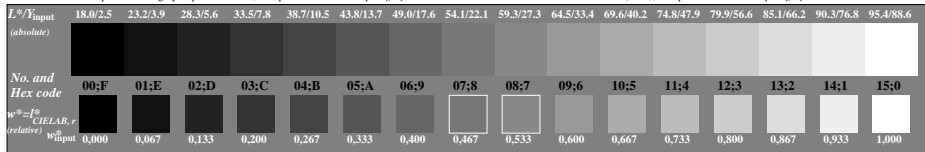


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: $w^{\text{lin}} 1.0 \exp \text{ setgray}$

ISO/IEC-test chart no. 3 according to


ISO/IEC 15775 and
DIS ISO/IEC 19839-X; input: $w^{\text{lin}} 1.0 \exp \text{ setgray}$
output: $w^{\text{lin}} 1.0 \exp \text{ setgray}$

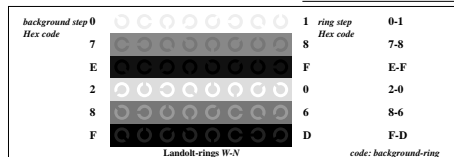

Picture C4: Landolt-rings W-N; PS operator: $w^{\text{lin}} 1.0 \exp \text{ setgray}$

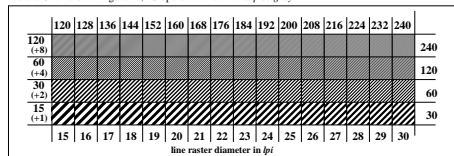

Picture C5: Line raster under 45° (or 135°); PS operator: $w^{\text{lin}} 1.0 \exp \text{ setgray}$

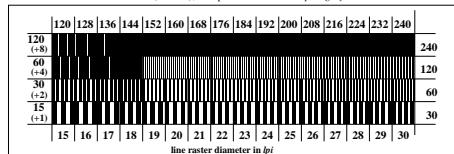

Picture C6: Line raster under 90° (or 0°); PS operator: $w^{\text{lin}} 1.0 \exp \text{ setgray}$