





Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: `nnn0* setcmykcolor`

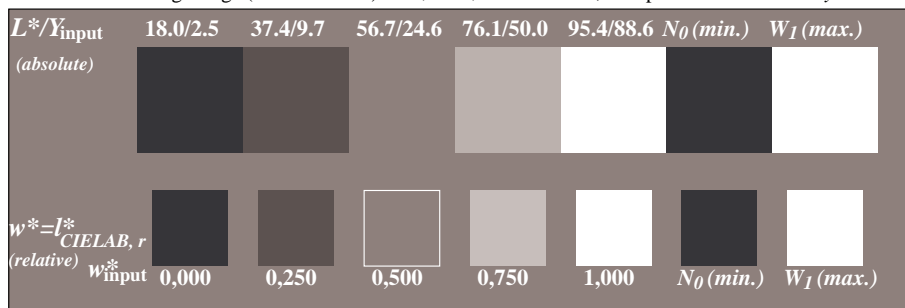


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator: `cmy0* setcmykcolor`

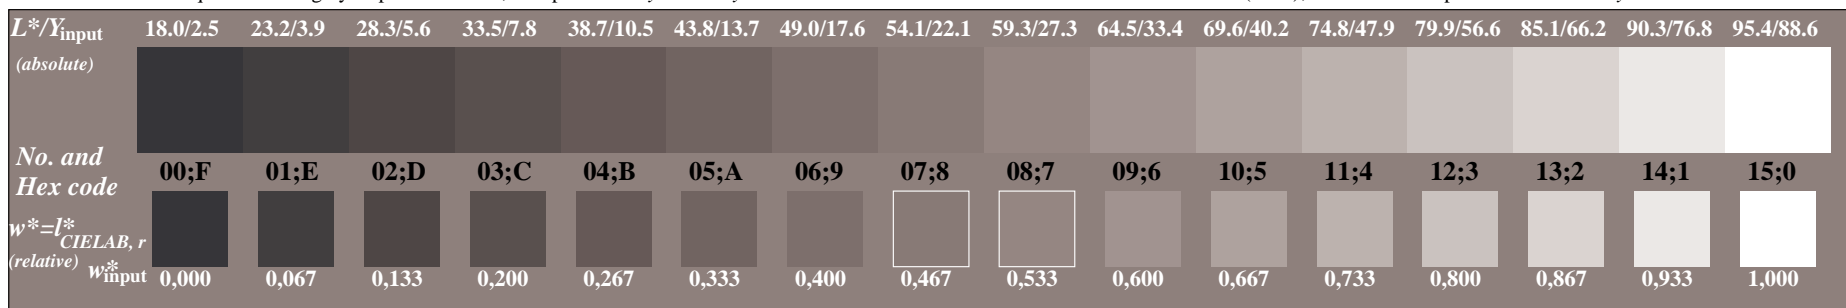


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: `nnn0* setcmykcolor`

ISO/IEC-test chart no. 3 according to


ISO/IEC 15775 and  
DIS ISO/IEC 19839-X; input: `nnn0*lin 1.0 exp setcmykcolor`  
output: `nnn0*lin 1.0 exp setcmykcolor`

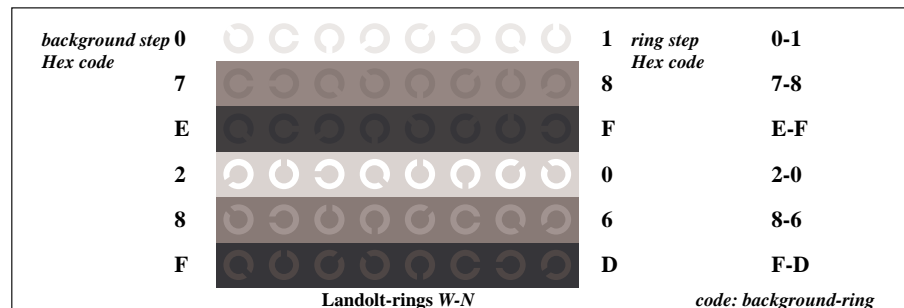

Picture C4: Landolt-rings W-N; PS operator: `nnn0* setcmykcolor`

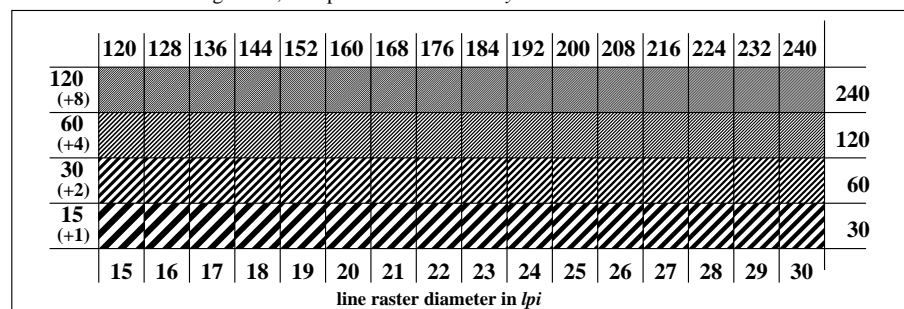

Picture C5: Line raster under 45° (or 135°); PS operator: `nnn0* setcmykcolor`

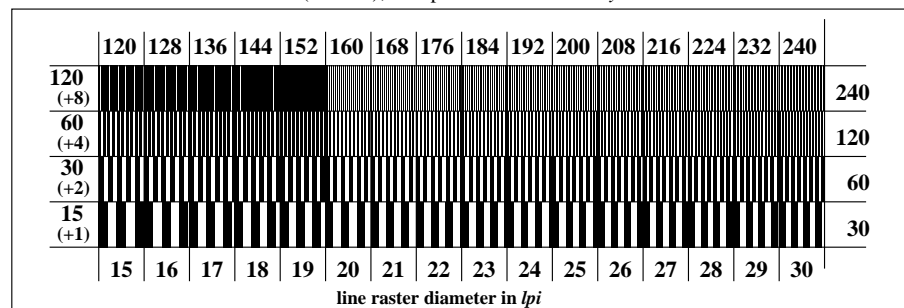

Picture C6: Line raster under 90° (or 0°); Use of the PS operator `nnn0* setcmykcolor`