




material: code=rha4ta
nd printers

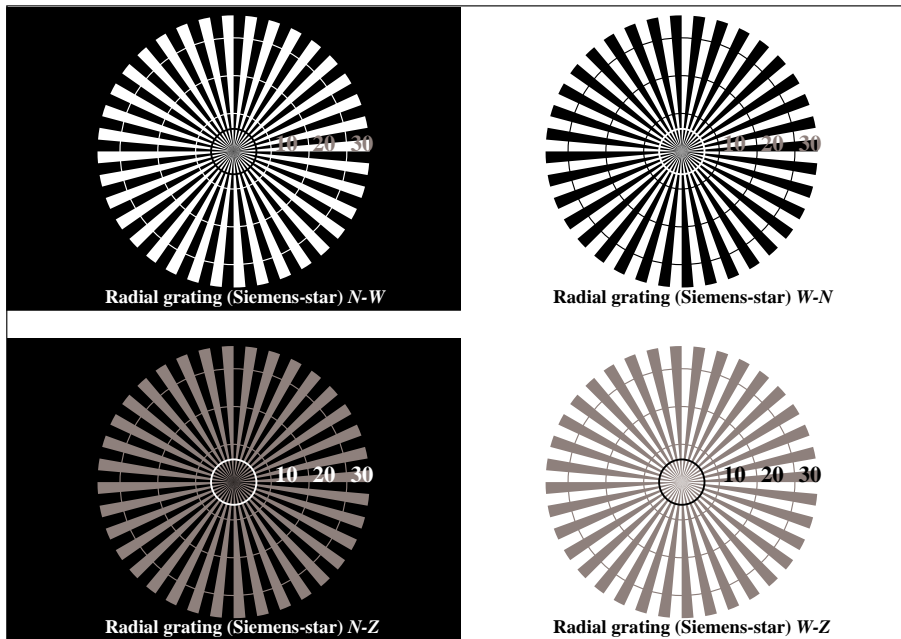

Picture C1: Radial gratings (Siemens-stars) *N-W*, *W-N*, *N-Z* and *W-Z*; PS operator: *nnn0* setcmykcolor*

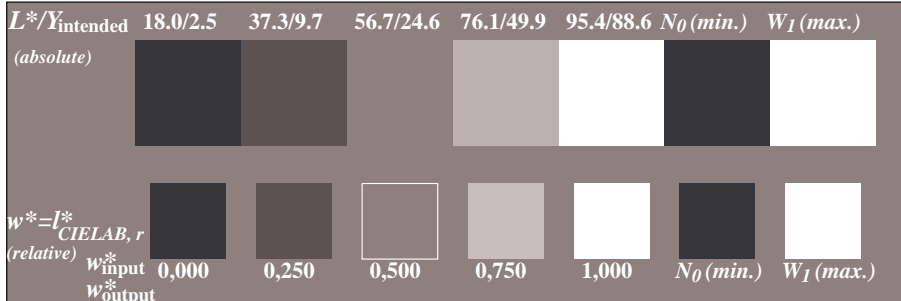

Picture C2: 5 visual equidistant L^* -grey steps + $N0$ + $W1$; PS operator: *cmy0* setcmykcolor*

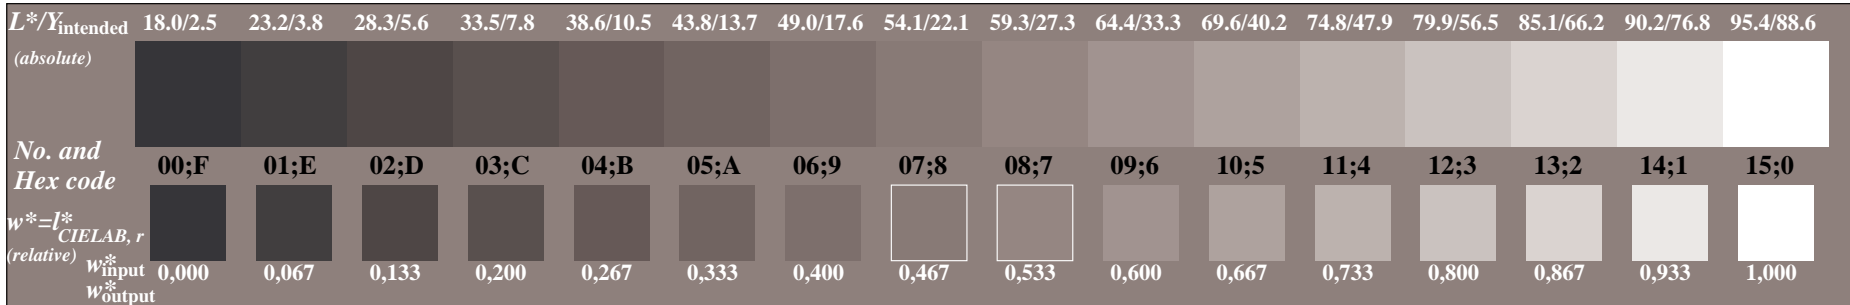


Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *nnn0* setcmykcolor*




ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and input: *nnn0*lin 1.0 exp setcmykcolor*
 DIS ISO/IEC 19839-X; output: *Startup (S) data dependend*


input: $nnn0 * lin$ 1.0 exp setcmykcolor
output: *Startup* (S) data dependend

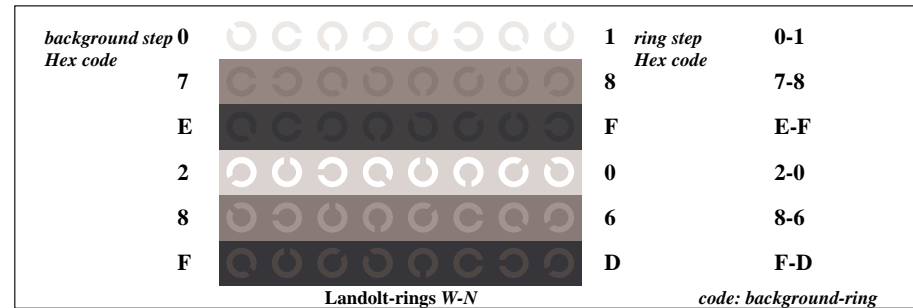

Picture C4: Landolt-rings W-N; PS operator: *nnn0* setcmykcolor*

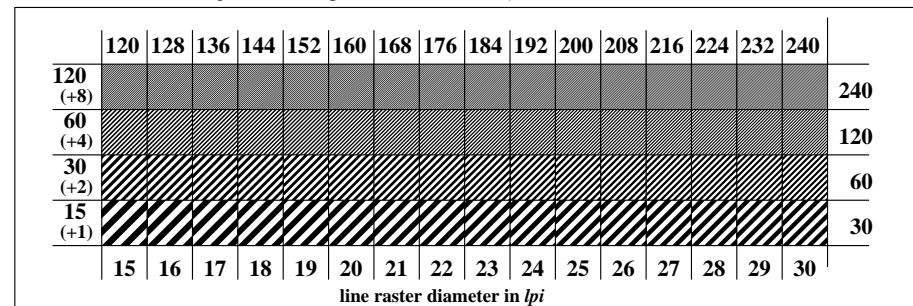

Picture C5: Line raster under 45° (or 135°); PS operator: `nnn0* setmykcolor`

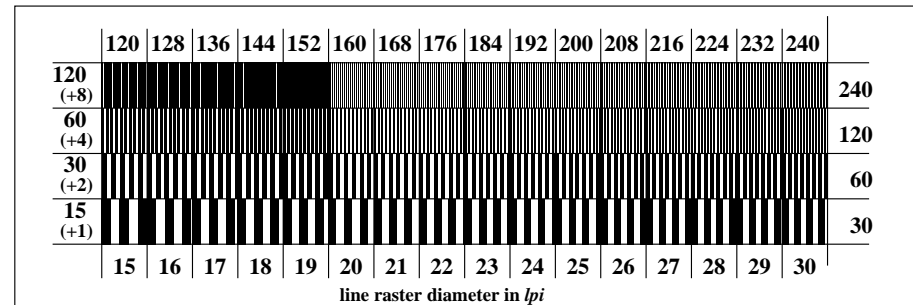

Picture C6: Line raster under 90° (or 0°); Use of the PS operator `nnn0* setcmykcolor`