



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: $www^* \text{setrgbcolor}$

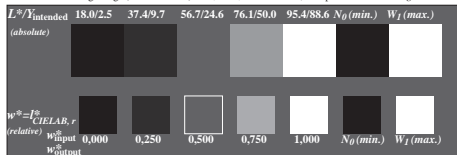

Picture C2: 5 visual equidistant L^* -gray steps + N_0 + W_1 ; PS operator: $www^* \text{setrgbcolor}$

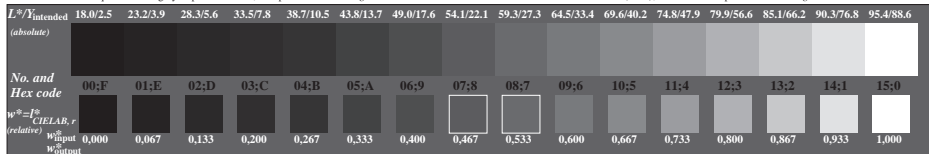


Picture C3: 16 visual equidistant L^* -gray steps; PS operator: $www^* \text{setrgbcolor}$


ISO/IEC-test chart no. 3 according to

ISO/IEC 15775 and
DIS ISO/IEC 19839-X;


input: $www^* \text{lin } 1.0 \exp \text{ setrgbcolor}$
output: $cm y 0^* / 00 n^* \text{ setcmykcolor}$

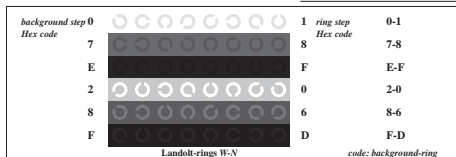

Picture C4: Landolt-rings W-N; PS operator: $www^* \text{setrgbcolor}$

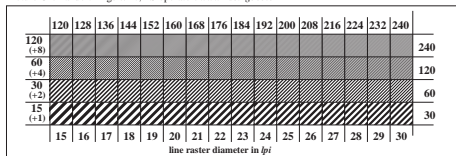

Picture C5: Line raster under 45° (or 135°); PS operator: $www^* \text{setrgbcolor}$

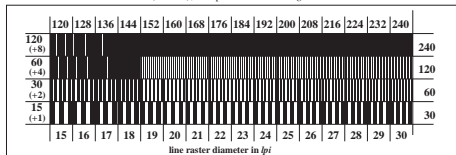

Picture C6: Line raster under 90° (or 0°); Use of the PS operator $www^* \text{setrgbcolor}$