www.ps.bam.de/DE96/F96E00F1.PS/.TXT; linearized output
F: Output Linearization (OL) data DE96/F96E00F1.DAT in File (F)

Picture B1: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, *4 colorimage*

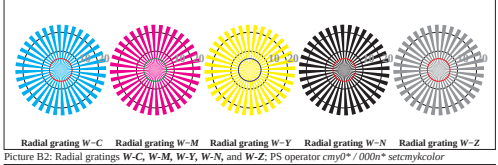

Picture B2: Radial gratings ***W-C, W-M, W-Y, W-N,*** and ***W-Z***; PS operator *cmy0* / 000n* setcmykcolor*

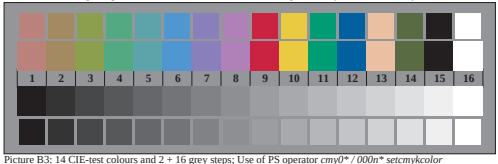

Picture B3: 14 CIE-test colours and 2 + 16 grey steps; Use of PS operator *cmy0* / 000n* setcmykcolor*

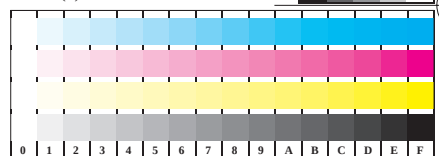

Picture B4: 16 equidistant steps ***W-C, W-M, W-Y*** and ***W-N***; PS operator *cmy0* / 000n* setcmykcolor*

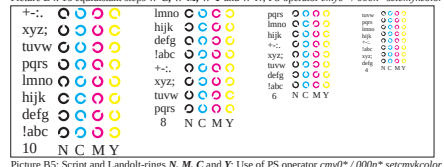

Picture B5: Script and Landolt-rings ***N, M, C*** and ***Y***; Use of PS operator *cmy0* / 000n* setcmykcolor*

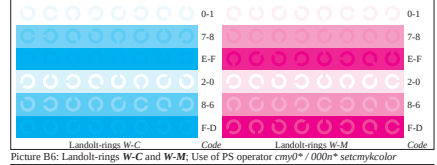

Picture B6: Landolt-rings ***W-C*** and ***W-M***; Use of PS operator *cmy0* / 000n* setcmykcolor*

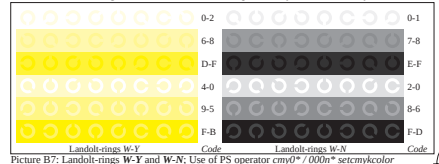

Picture B7: Landolt-rings ***W-Y*** and ***W-N***; Use of PS operator *cmy0* / 000n* setcmykcolor*

See for similar files: http://www.ps.bam.de/DE96/
Information and Order: http://www.ps.bam.de Version 2.0, io=0,0; iORS; oORS, CIELAB

BAM registration: 20030101-DE96/F96E00F1.PS/.TXT
application for monitors (Yr=2.5) and printers
BAM material: code=rha4a

Fig. B1 to B7 of ISO/IEC-test chart 2;

ISO/IEC 15775 and
DIS ISO/IEC 19839-X;

input: *cmy0* / 000n* setcmykcolor*
output: *cmy0* / 000n* setcmykcolor*