

image pixel: 192 x 128

384 x 256


768 x 512

1536 x 1024

3072 x 2048




Picture D1: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (nf); PS operators settransfer, 4 colorimage

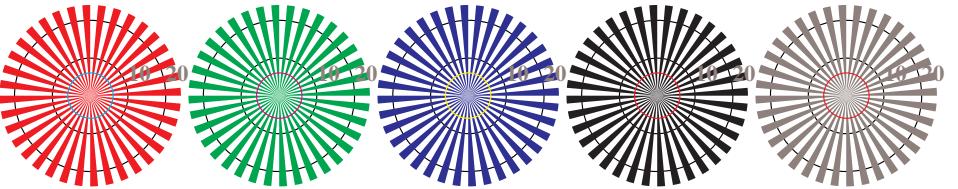

Radial grating W-O Radial grating W-L Radial grating W-V Radial grating W-N Radial grating W-Z

Picture D2: Radial gratings W-O, W-L, W-V, W-N, and W-Z; PS operator cmy0* setcmykcolor (only)

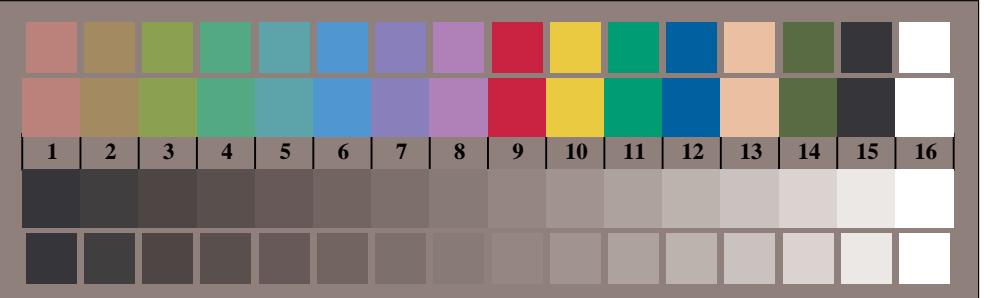


Picture D3: 14 CIE-test colours and 2 + 16 grey steps; Use of PS operator cmy0* setcmykcolor (only)

Fig. D1 to D7 of ISO/IEC-test chart 4;

ISO/IEC 15775 and
DIS ISO/IEC 19839-X; output: no change compared to input

BAM registration: 20030101-DE98/10L/L98E02NP.PS/.PDF BAM material: code=rha4ta

application for monitors (Yr=2.5) and printers

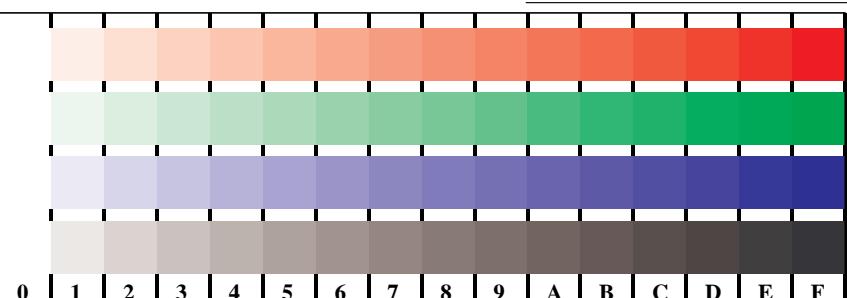


Picture D4: 16 equidistant steps W-O, W-L, W-V and W-N; Use of PS operator cmy0* setcmykcolor (only)


+..	lmno															
xyz;	hijk															
tuvw	defg															
pqrs	!abc															
lmno	xyz;															
hijk	tuvw															
defg	!abc															
!abc	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V
10 N O L V																

+-.	lmno															
xyz;	hijk															
tuvw	defg															
pqrs	!abc															
lmno	xyz;															
hijk	tuvw															
defg	!abc															
!abc	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V	6 N O L V
10 N O L V																

Picture D5: Script and Landolt-rings N, O, L and V; Use of PS operator cmy0* setcmykcolor (only)

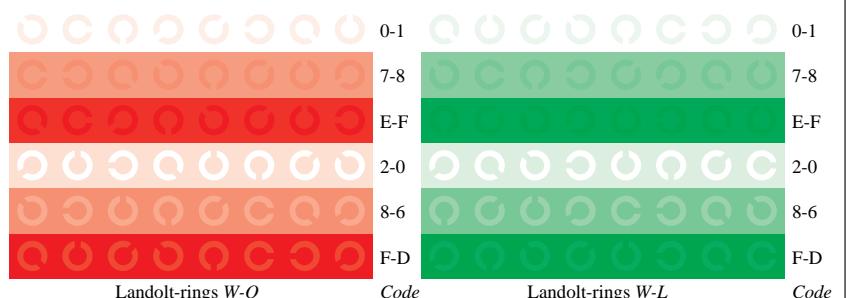

Landolt-rings W-O Code Landolt-rings W-L Code

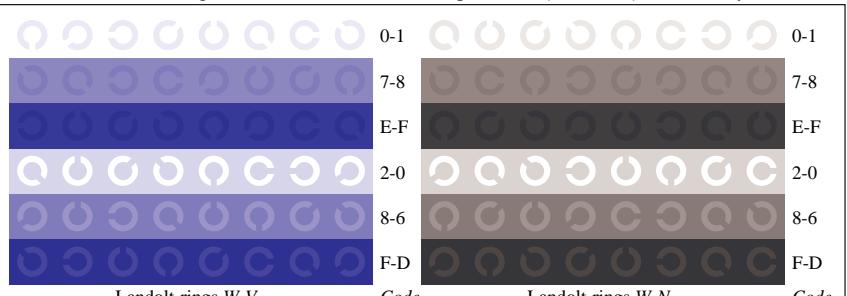

Landolt-rings W-V Code Landolt-rings W-N Code