

| i  | LAB*ref | LAB*out | LAB*out/c-ref | $\Delta E^*$ | Start-Ausgabe S1                                  |
|----|---------|---------|---------------|--------------|---------------------------------------------------|
| 1  | 5.6     | 0.0     | 0.0           | 0.0          | 0.01 Kennzeichnung nach                           |
| 2  | 11.41   | 0.0     | 0.0           | 1.01         | ISO/IEC 15775 Anhang G                            |
| 3  | 17.23   | 0.0     | 0.0           | 1.83         | und DIN 33866-1 Anhang G                          |
| 4  | 23.04   | 0.0     | 0.0           | 2.64         | nur $L^*$ -Helligkeit benutzt                     |
| 5  | 28.85   | 0.0     | 0.0           | 3.45         | $\Delta L^* = 92.8 - 5.6$                         |
| 6  | 34.67   | 0.0     | 0.0           | 4.27         | Gleichmaessigkeit                                 |
| 7  | 40.48   | 0.0     | 0.0           | 5.08         | $g^* = 67.0$                                      |
| 8  | 46.29   | 0.0     | 0.0           | 5.89         |                                                   |
| 9  | 52.11   | 0.0     | 0.0           | 1.71         | Helligkeitsumfang rel. zu Offset                  |
| 10 | 57.92   | 0.0     | 0.0           | 1.52         | $f^* = 112.7$                                     |
| 11 | 63.73   | 0.0     | 0.0           | 1.67         |                                                   |
| 12 | 69.55   | 0.0     | 0.0           | 1.05         | $\Delta L^*$ -Grauvariation                       |
| 13 | 75.36   | 0.0     | 0.0           | 5.24         | $v^* = 0.0$                                       |
| 14 | 81.17   | 0.0     | 0.0           | 3.33         |                                                   |
| 15 | 86.99   | 0.0     | 0.0           | 1.51         | Mittlerer Helligkeitsabstand (16 Stufen)          |
| 16 | 92.8    | 0.0     | 0.0           | 0.01         | $\Delta E^*_{CIELAB} = 2.5$                       |
| 17 | 5.6     | 0.0     | 0.0           | 0.01         |                                                   |
| 18 | 27.4    | 0.0     | 0.0           | 3.25         |                                                   |
| 19 | 49.2    | 0.0     | 0.0           | 3.8          | Mittlerer Helligkeitsabstand (5 Stufen)           |
| 20 | 71.0    | 0.0     | 0.0           | 2.1          |                                                   |
| 21 | 92.8    | 0.0     | 0.0           | 0.01         | $\Delta L^*_{CIELAB} = 1.8$                       |
|    |         |         |               |              | Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 89$ |


Device: (F); Meas.: F10GS1A.PS/.TXT; Date: M010203

www.ps.bam.de/DG02/10F/F10GS1A.PS/.TXT

| i  | LAB*ref | LAB*out | LAB*out/c-ref | $\Delta E^*$ | Linearisierte Ausgabe S2                          |
|----|---------|---------|---------------|--------------|---------------------------------------------------|
| 1  | 14.44   | 0.0     | 0.0           | 0.01         | Kennzeichnung nach                                |
| 2  | 19.57   | 0.0     | 0.0           | 0.04         | ISO/IEC 15775 Anhang G                            |
| 3  | 24.7    | 0.0     | 0.0           | 0.27         | und DIN 33866-1 Anhang G                          |
| 4  | 29.83   | 0.0     | 0.0           | 0.45         | nur $L^*$ -Helligkeit benutzt                     |
| 5  | 34.97   | 0.0     | 0.0           | 0.63         | $\Delta L^* = 91.41 - 14.44$                      |
| 6  | 40.1    | 0.0     | 0.0           | 0.77         | Gleichmaessigkeit                                 |
| 7  | 45.23   | 0.0     | 0.0           | 0.83         | $g^* = 92.0$                                      |
| 8  | 50.36   | 0.0     | 0.0           | 0.68         |                                                   |
| 9  | 55.49   | 0.0     | 0.0           | 0.91         | Helligkeitsumfang rel. zu Offset                  |
| 10 | 60.62   | 0.0     | 0.0           | 1.06         | $f^* = 99.4$                                      |
| 11 | 65.75   | 0.0     | 0.0           | 1.45         |                                                   |
| 12 | 70.88   | 0.0     | 0.0           | 1.1          | $\Delta L^*$ -Grauvariation                       |
| 13 | 76.02   | 0.0     | 0.0           | 0.88         | $v^* = 0.0$                                       |
| 14 | 81.15   | 0.0     | 0.0           | 0.83         |                                                   |
| 15 | 86.28   | 0.0     | 0.0           | 0.48         | Mittlerer Helligkeitsabstand (16 Stufen)          |
| 16 | 91.41   | 0.0     | 0.0           | 0.01         | $\Delta E^*_{CIELAB} = 0.7$                       |
| 17 | 14.44   | 0.0     | 0.0           | 0.01         |                                                   |
| 18 | 33.68   | 0.0     | 0.0           | 0.58         |                                                   |
| 19 | 52.93   | 0.0     | 0.0           | 0.8          | Mittlerer Helligkeitsabstand (5 Stufen)           |
| 20 | 72.17   | 0.0     | 0.0           | 1.05         |                                                   |
| 21 | 91.41   | 0.0     | 0.0           | 0.01         | $\Delta L^*_{CIELAB} = 0.5$                       |
|    |         |         |               |              | Mittlerer Farbwiedergabe-Index: $R^*_{ab,m} = 97$ |


Device: (F); Meas.: F10GS2A.PS/.TXT; Date: M010203

www.ps.bam.de/DG02/10F/F10GS2A.PS/.TXT

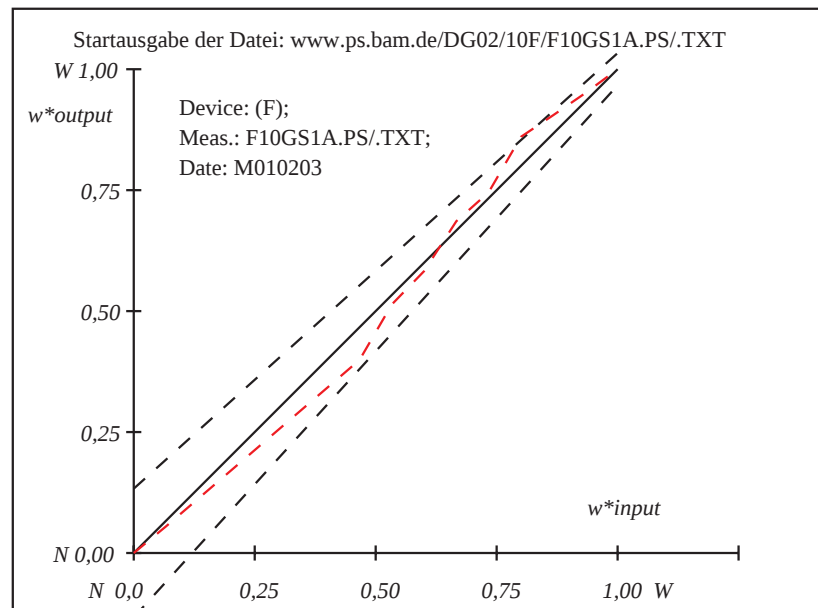

Device: (F); Meas.: F10GS1A.PS/.TXT; Date: M010203

www.ps.bam.de/DG02/10F/F10GS1A.PS/.TXT

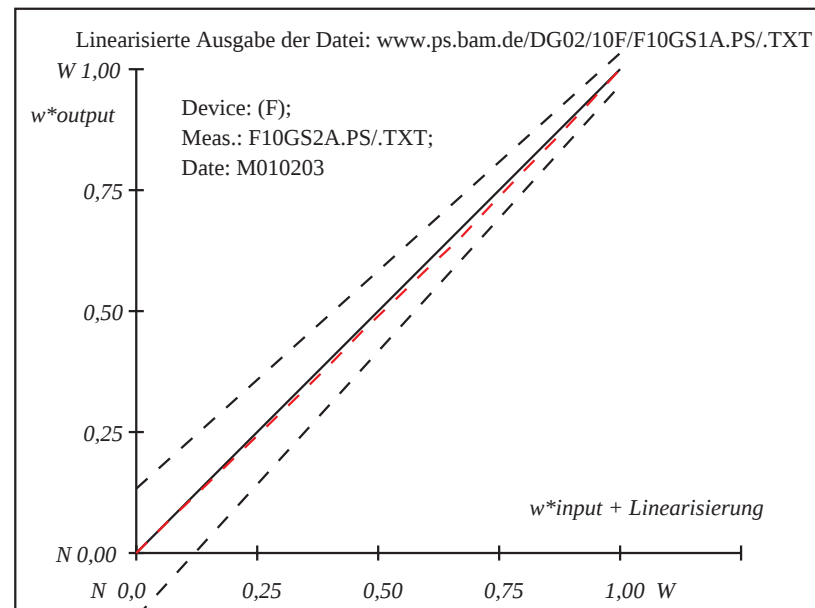

Device: (F); Meas.: F10GS2A.PS/.TXT; Date: M010203

www.ps.bam.de/DG02/10F/F10GS2A.PS/.TXT