





Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS operator: *nnn0\* setcmykcolor*

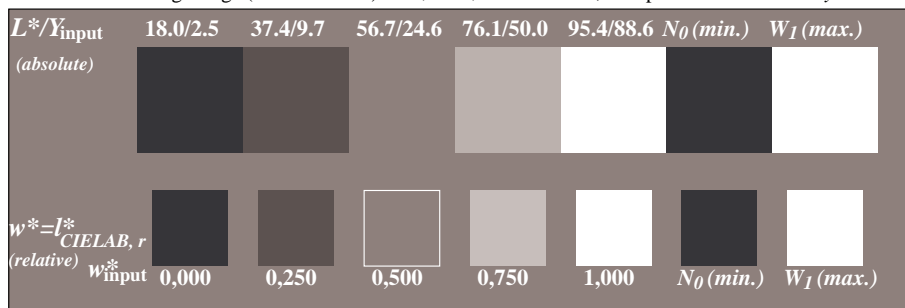


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; PS operator: *cmy0\* setcmykcolor*




Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: *nnn0\* setcmykcolor*; use file [www.bam.de/FE88/10L/L88E0iNA.PS](http://www.bam.de/FE88/10L/L88E0iNA.PS) or [L88E0iNP.PS](http://www.bam.de/L88E0iNP.PS) (i=0,7) for PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to


ISO/IEC 15775 and input: *nnn0\*lin 1.0 exp setcmykcolor*  
DIS ISO/IEC 19839-X; output: *nnn0\*lin 1.0 exp setcmykcolor*

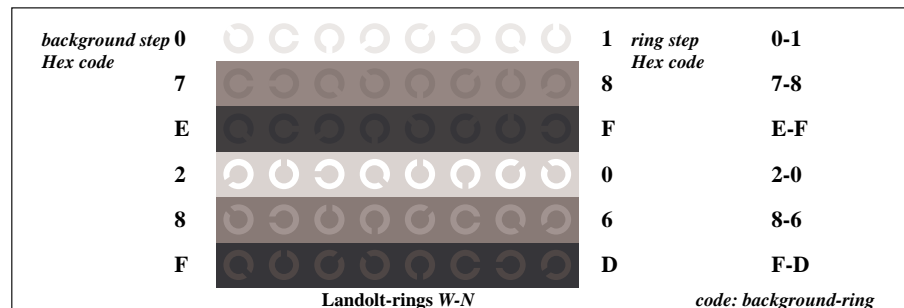

Picture C4: Landolt-rings W-N; PS operator: *nnn0\* setcmykcolor*

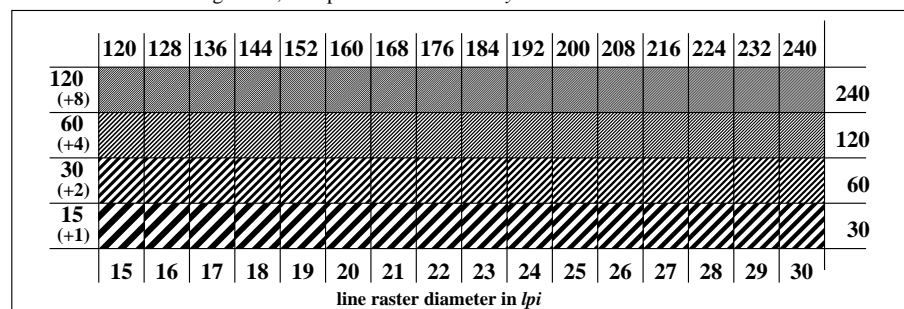

Picture C5: Line raster under 45° (or 135°); PS operator: *nnn0\* setcmykcolor*

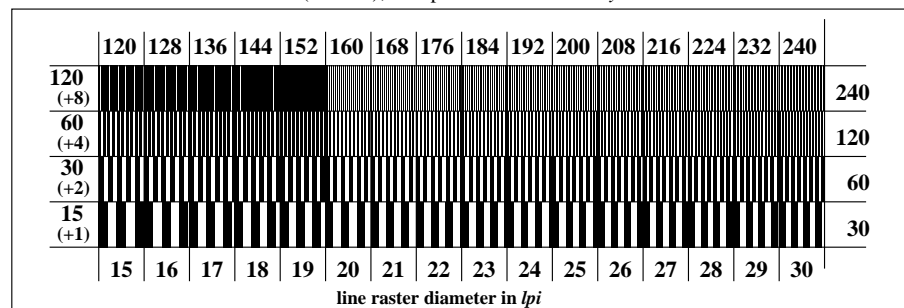

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *nnn0\* setcmykcolor*