


See for similar files: <http://www.ps.bam.de/FE87/>  
Information and Order: <http://www.ps.bam.de> Version 2.0, io=1,1?

BAM registration: 20031201-FE87/10L/L87E03SP.PS/.PDF BAM material: code=rha4ta  
Bottom part of page: application for monitors (Yr=2.5) and printers

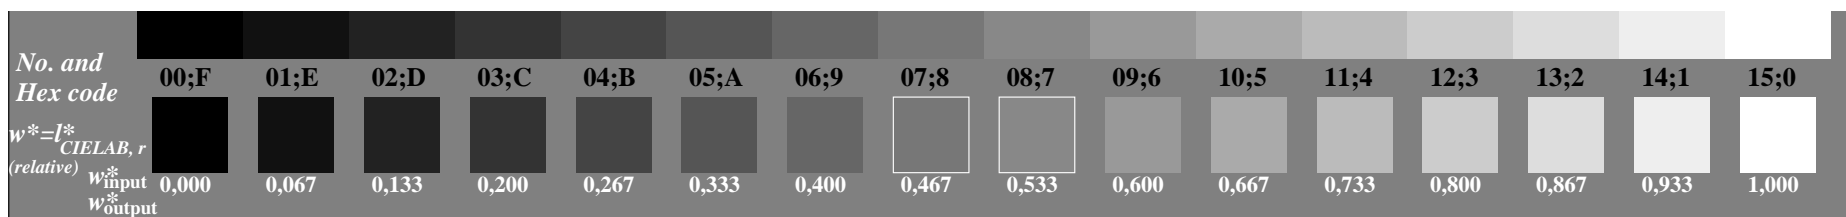

Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator:  $w^*lin 1.0 exp setgray$ ; use file [www.bam.de/EE87/10L/L87E0iSA.PS](http://www.bam.de/EE87/10L/L87E0iSA.PS) or [L87E0iSP.PS](http://www.bam.de/L87E0iSP.PS)/.PDF (i=0,7) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and input:  $w^*lin 1.0 exp setgray$   
DIS ISO/IEC 19839-X; output: *Startup (S) data dependend*