


See for similar files: <http://www.ps.bam.de/FE88/>  
Information and Order: <http://www.ps.bam.de> Version 2.0, io=2,2

BAM registration: 20031201-FE88/10L/L88E02NP.PS/.PDF BAM material: code=rha4ta  
Bottom part of page: application for monitors (Yr=2.5) and printers

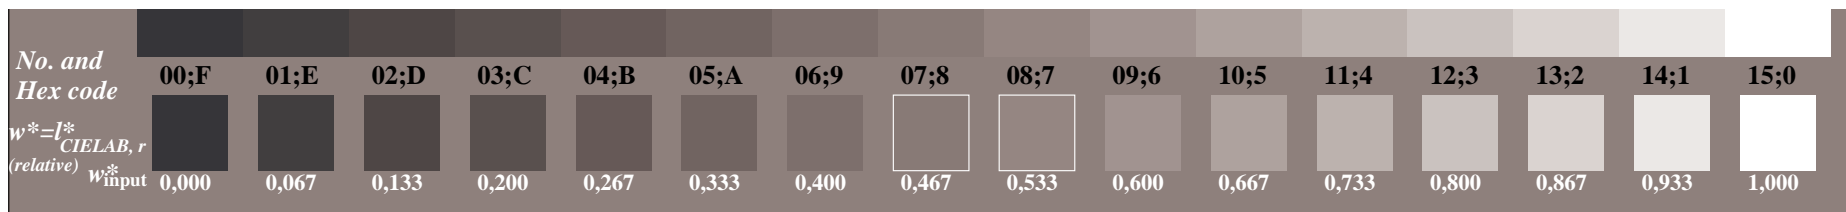

Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: `nnn0* setcmykcolor`; use file [www.bam.de/EE88/10L/L88E0iNA.PS](http://www.bam.de/EE88/10L/L88E0iNA.PS) or [L88E0iNP.PS](http://www.bam.de/L88E0iNP.PS)/.PDF (i=0,7) for PDF systems to complete the figure

ISO/IEC-test chart no. 3 according to ISO/IEC 15775 and DIS ISO/IEC 19839-X; input: `nnn0*lin 1.0 exp setcmykcolor`  
output: `nnn0*lin 1.0 exp setcmykcolor`