

See for similar files: <http://www.ps.bam.de/FE95/FE95.HTM>
 Information and Order: <http://www.ps.bam.de> Version 2.0, io=5,0; iORS; oORS, CIELAB

C
 $L\text{AB}^*$

M
 $L\text{AB}^*$

Y
 $L\text{AB}^*$

N
 $L\text{AB}^*$

O
 $L\text{AB}^*$

L
 $L\text{AB}^*$

V
 $L\text{AB}^*$

N
 $L\text{AB}^*$

BAM registration: 20030101-FE95/10FF95E00FP.PS/.PDF BAM material: code=rha4ta
 application for measurement of monitor (Yr=2.5) and printer output

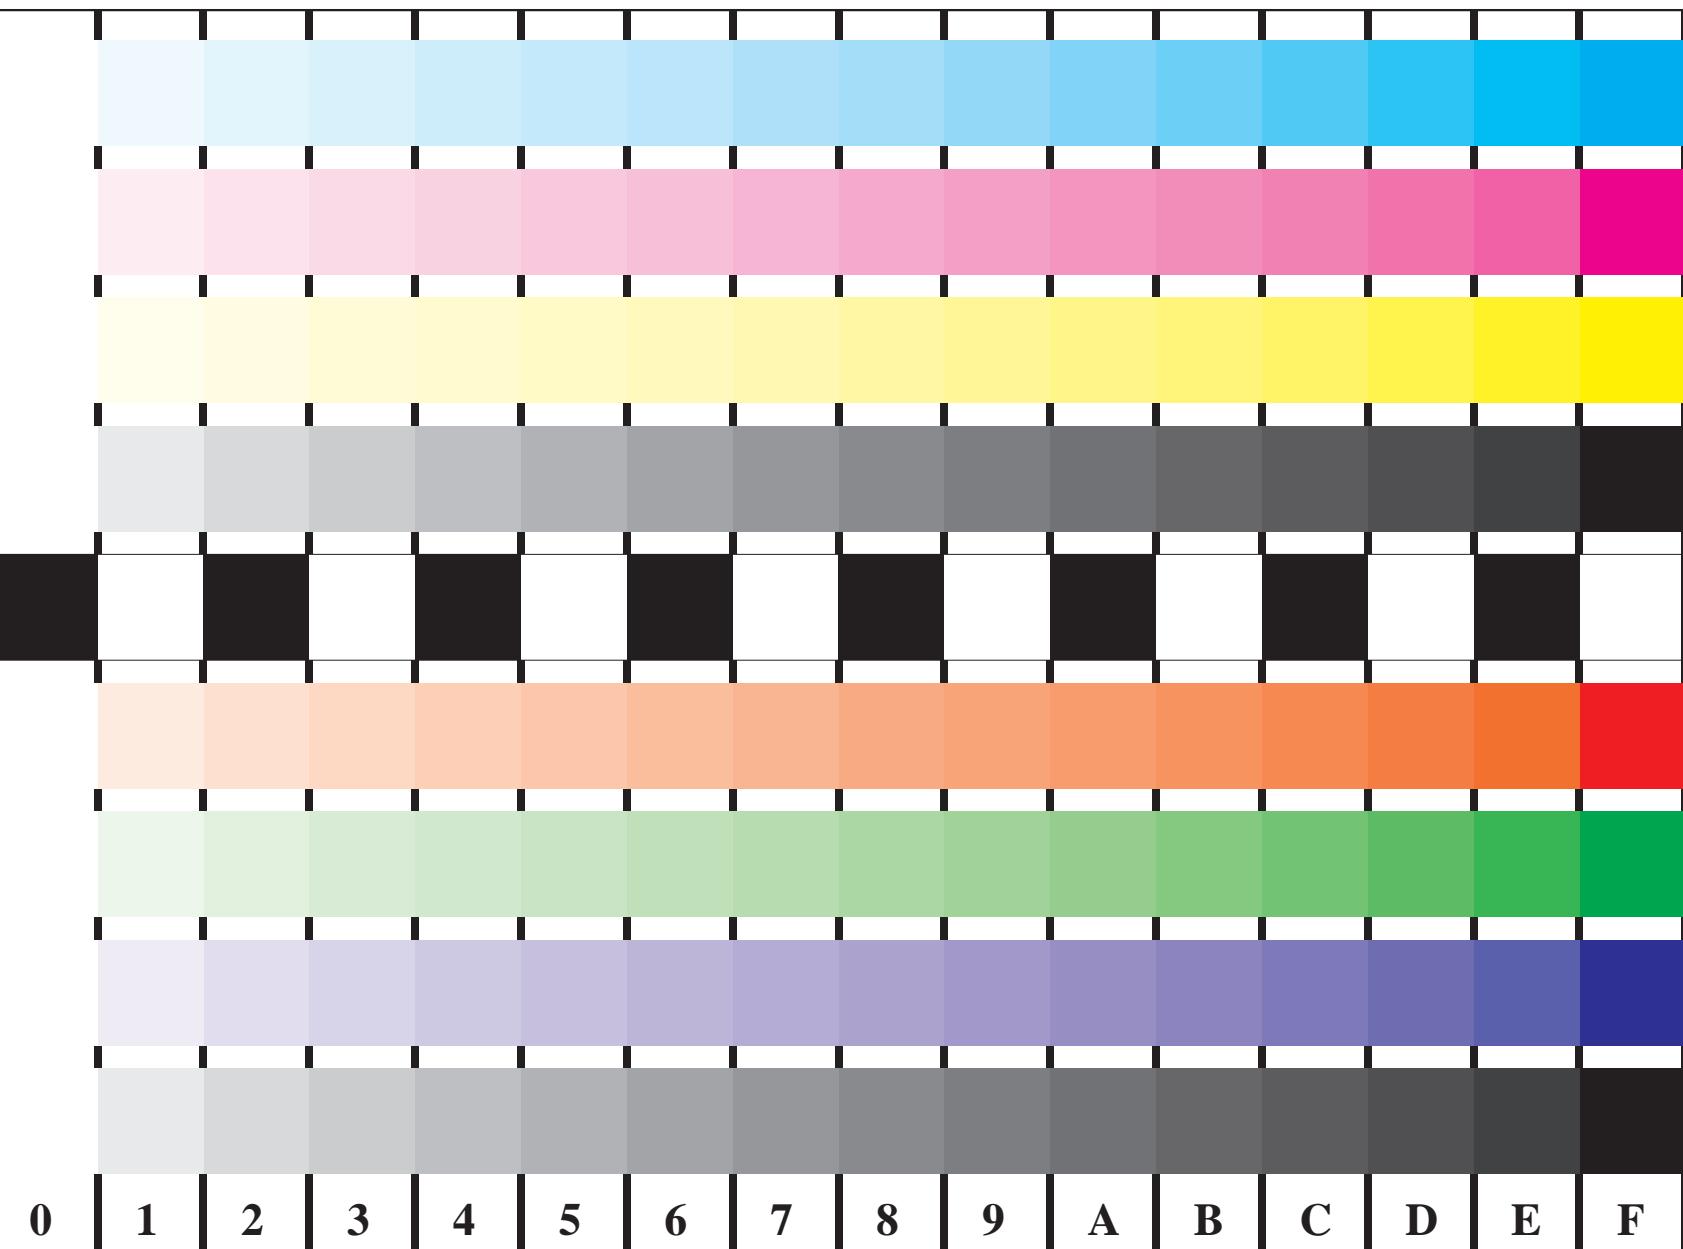


Figure B4 and D4 of the ISO/IEC-test charts no. 2 and 4; 16 visual equidistant steps of colour series; Use of the PS operator $L\text{AB}^* \text{setcolor}$





Fig. B4 of ISO/IEC-test chart 2 and
 Fig. D4 of ISO/IEC-test chart no. 4;

ISO/IEC 15775 and
 TR ISO/IEC 24705;

input: $L\text{AB}^* \text{setcolor}$
 output: $cmy0*/000n* \text{setcmykcolor}$

