


image pixel: 192 x 128
384 x 256
768 x 512
1536 x 1024
3072 x 2048




Picture B1: Flower motif, 14 CIE-test colours and 2 + 16 grey steps (sf); PS operators *settransfer*, 4 *colorimage*

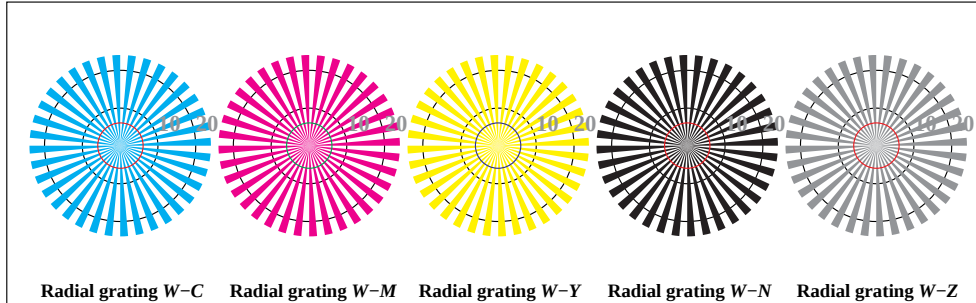


Picture B2: Radial gratings W-C, W-M, W-Y, W-N, and W-Z; PS operator *cmy0*/000n* setcmykcolor*




Picture B3: 14 CIE-test colours and 2 + 16 grey steps; Use of PS operator *cmy0* / 000n* setcmykcolor*

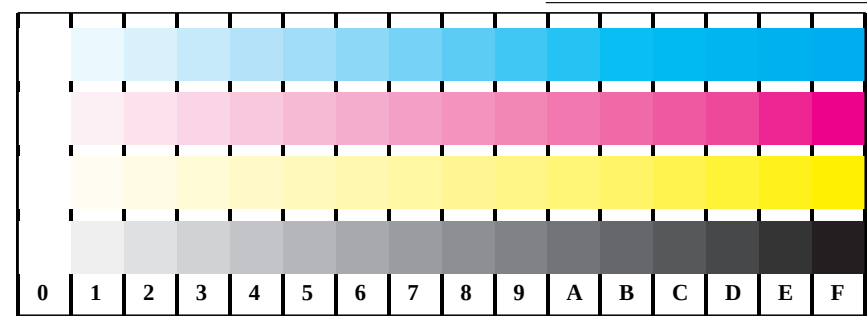


Picture B4: 16 equidistant steps **W-C**, **W-M**, **W-Y** and **W-N**; PS operator *cmy0* / 000n* setcmykcolor*

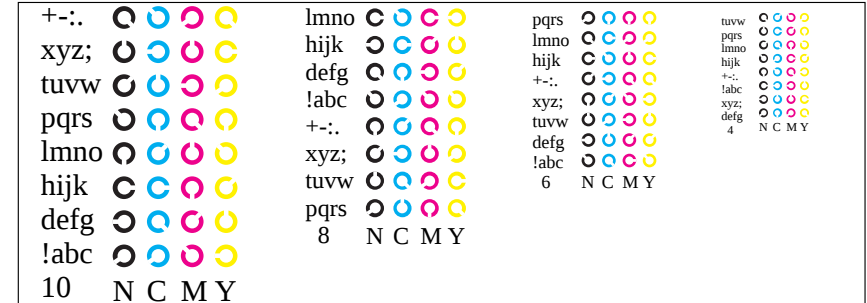

Picture B5: Script and Landolt-rings *N*, *M*, *C* and *Y*; Use of PS operator *cmy0* / 000n* setcmykcolor*

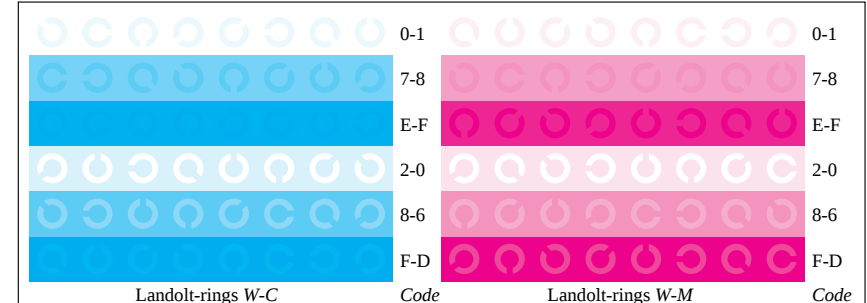

Picture B6: Landolt-rings **W-C** and **W-M**; Use of PS operator *cmly0* / 000n* setcmykcolor*

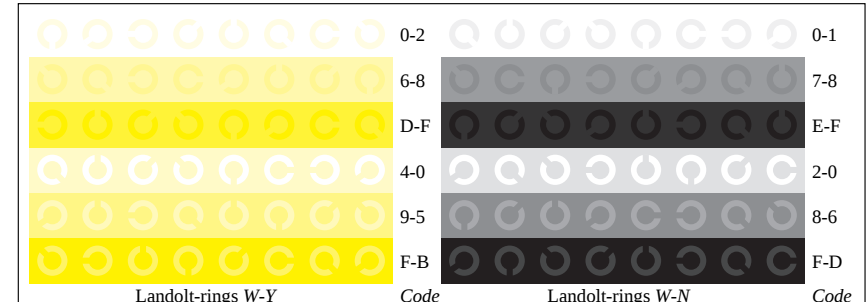

Picture B7: Landolt-rings W-Y and W-N; Use of PS operator *cmly0* / 000n* setcmykcolor*

Fig. B1 to B7 of ISO/IEC-test chart 2;

ISO/IEC 15775 and input: *cmy0* / 000n* setcmykcolor*
 DIS ISO/IEC 19839-X; output: *Startup (S) data dependend*

BAM registration: 20030101-FE9610/L96E01SP.PS.PDF
application for monitors (Yr=2.5) a

BAM material: code=rha4ta