




Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; Use of the PS operator *000n\* setcmycolor*

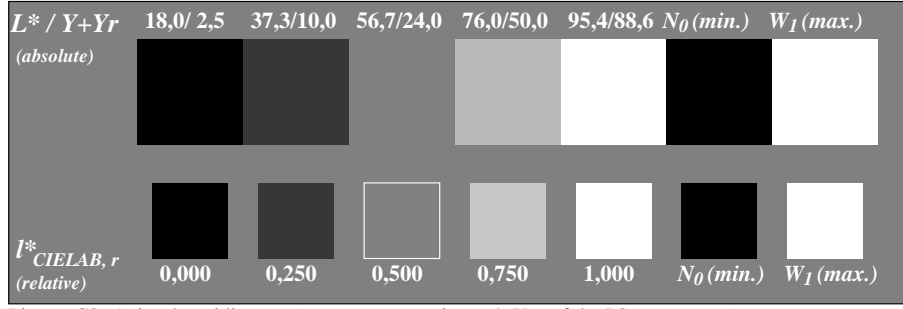


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; Use of the PS operator *w\* setgray*

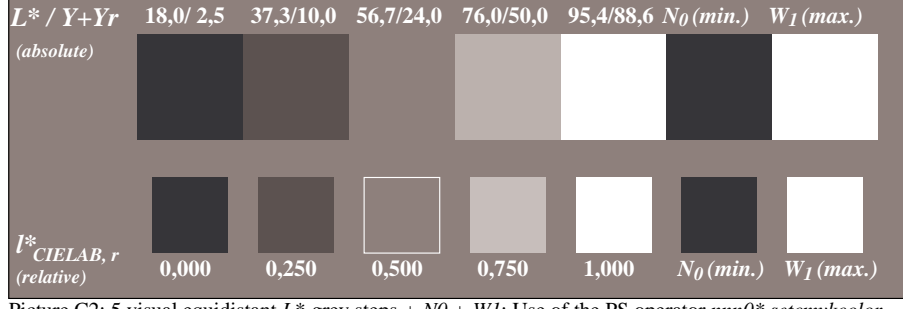


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; Use of the PS operator *nnn0\* setcmykcolor*

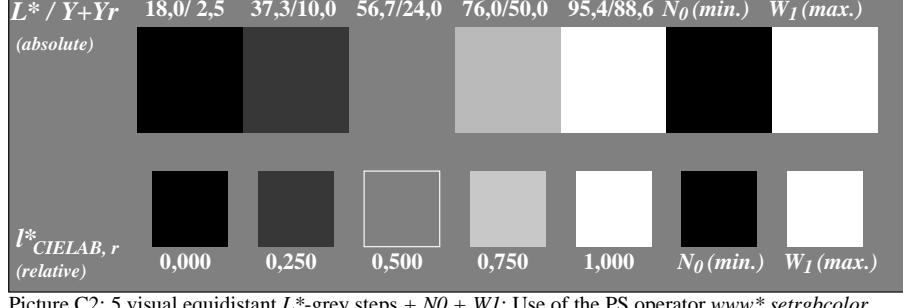

Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; Use of the PS operator *www\* setrgbcolor*

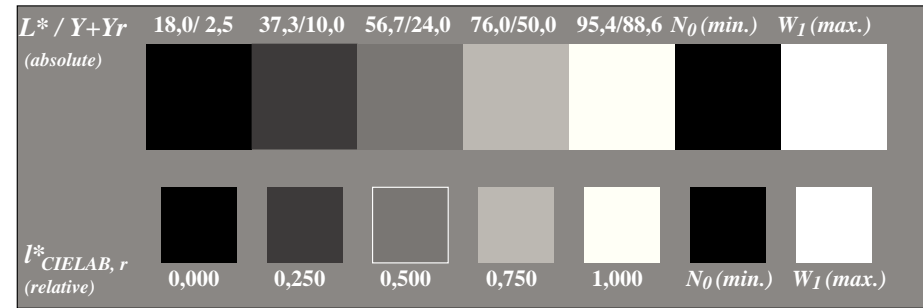

Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; Use of the PS operator *lab\* setcolor*

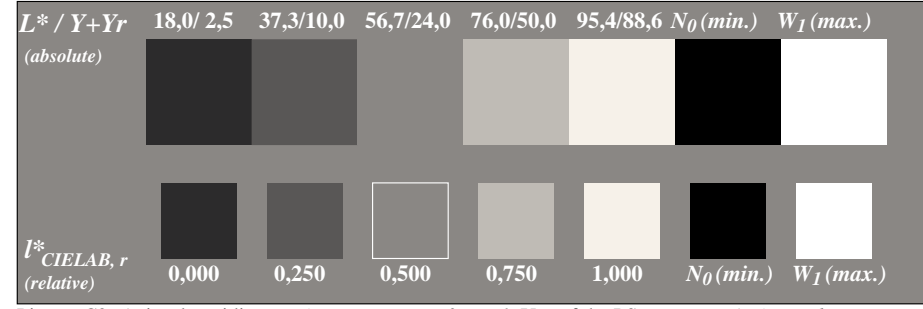

Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; Use of the PS operator *LAB\* setcolor*

Fig. C2 of ISO/IEC-test chart no. 3;

ISO/IEC 15775 and input: mixture (m) of PS operators  
 DIS ISO/IEC 19839-X; output: Startup (S) data depend

See for similar files: <http://www.ps.bam.de/DE80/DE80.HTM>  
 Information and Order: <http://www.ps.bam.de>  
 Version 2.0, io=m,m?

BAM registration: 20030101-IE80/10B/B80E01SP.PS/PDF  
 application for monitors and printers

BAM material: code=tha4ta