




www.ps.bam.de/DE82/10B/B82E07FP.PS/.PDF; linearized output  
F: Output Linearization (OL) data DE82/10B/B82E07FP.DAT in File (F)

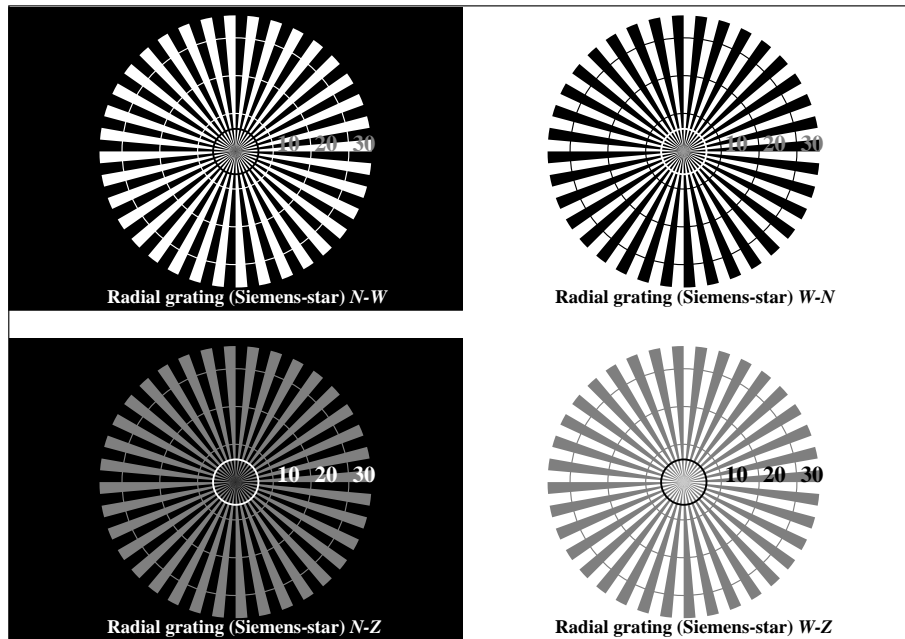


Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; Use of the PS operator *LAB\* setcolor*

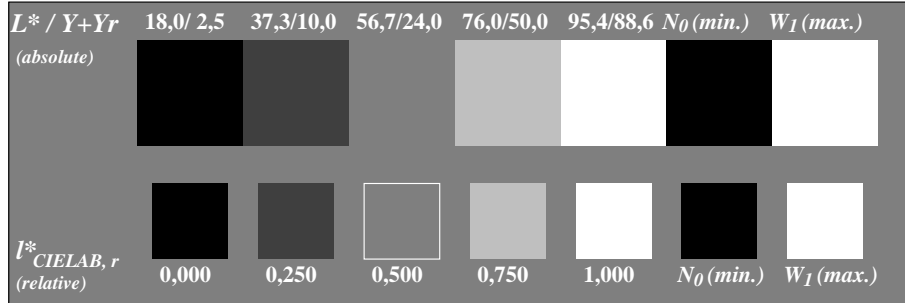


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; Use of the PS operator *LAB\* setcolor*

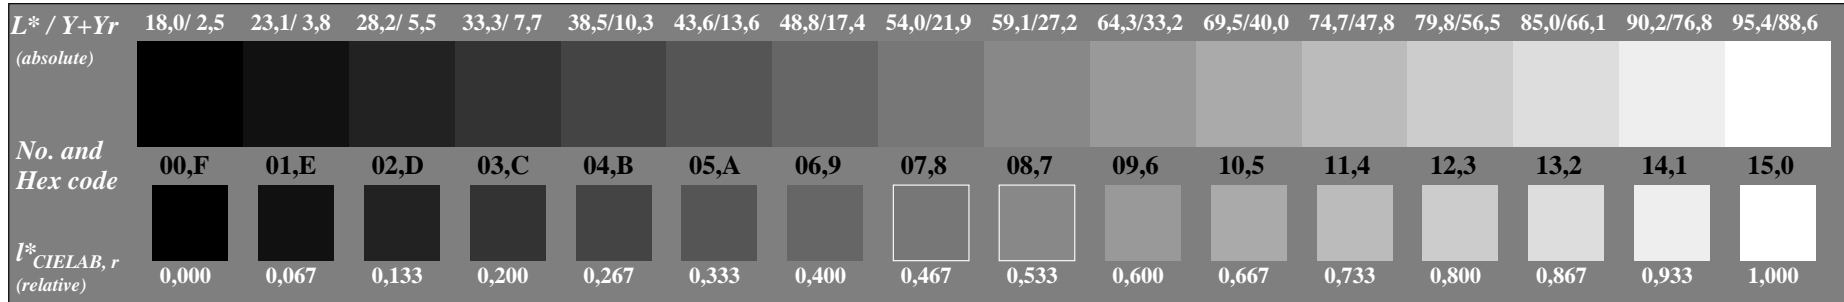


Picture C3: 16 visual equidistant  $L^*$ -grey steps; Use of the PS operator *LAB\* setcolor*

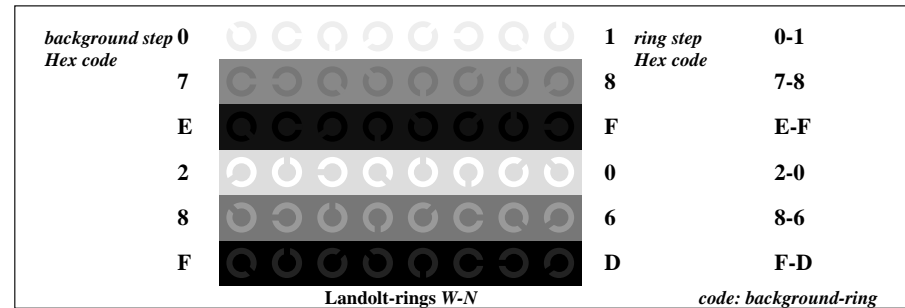

Picture C4: Landolt-rings W-N; Use of the PS operator *LAB\* setcolor*

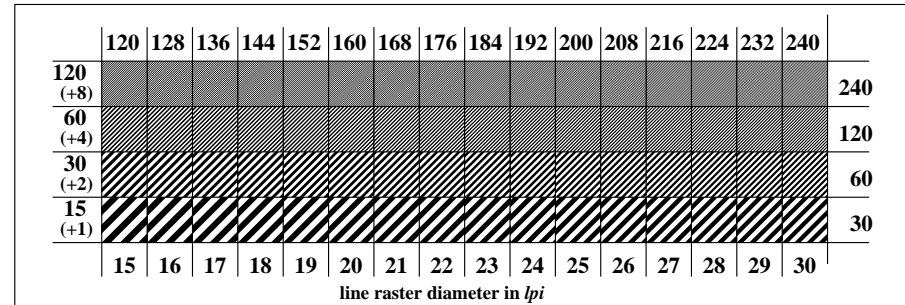

Picture C5: Line raster under 45° (or 135°); Use of the PS operator *LAB\* setcolor*

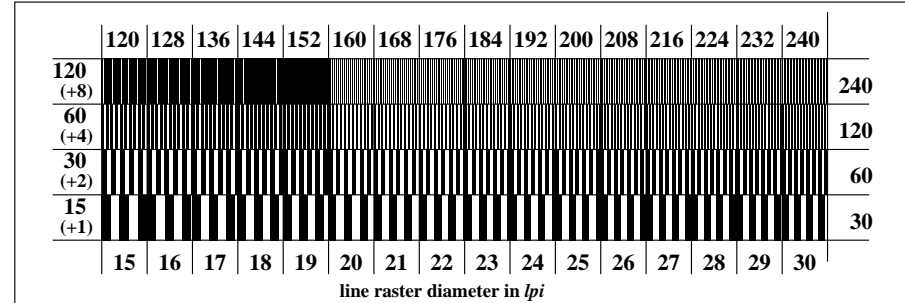

Picture C6: Line raster under 90° (or 0°); Use of the PS operator *LAB\* setcolor*

Fig. C1 to C6 of ISO/IEC-test chart 3;

ISO/IEC 15775 and input: *LAB\* setcolor*  
DIS ISO/IEC 19839-X; output: *w\* setgray*

