





Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: *w\*lin 1.0 exp setgray*

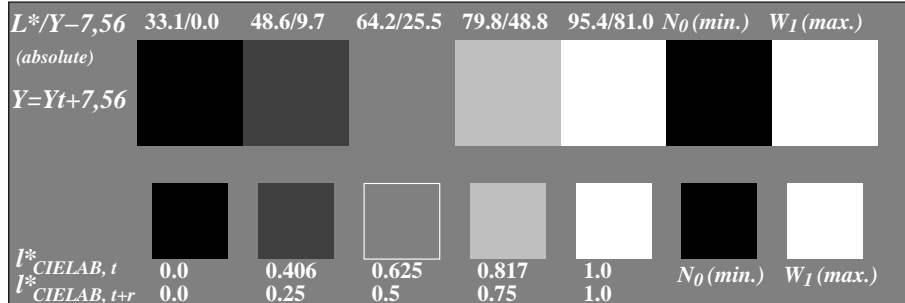


Picture C2: 5 visual equidistant  $L^*$ -gray steps +  $N_0$  +  $W_1$ ; PS operator: *w\*lin 1.0 exp setgray*

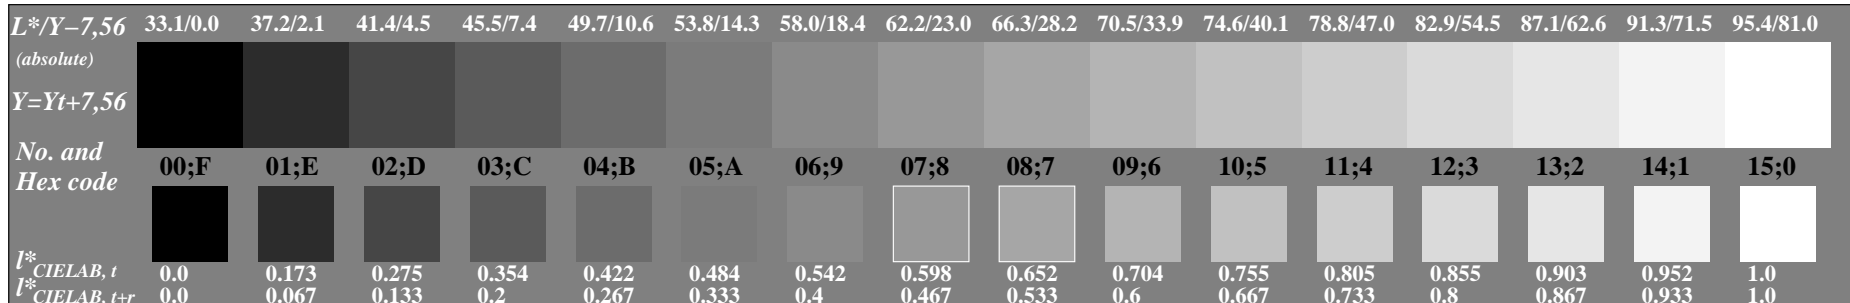


Picture C3: 16 visual equidistant  $L^*$ -gray steps; PS operator: *w\*lin 1.0 exp setgray*

ISO/IEC-test chart no. 3D according to


ISO/IEC 15775 and input: *w\*lin 1.0 exp setgray*  
DIS ISO/IEC 19839-X; output: *w\*lin 1.0 exp setgray*

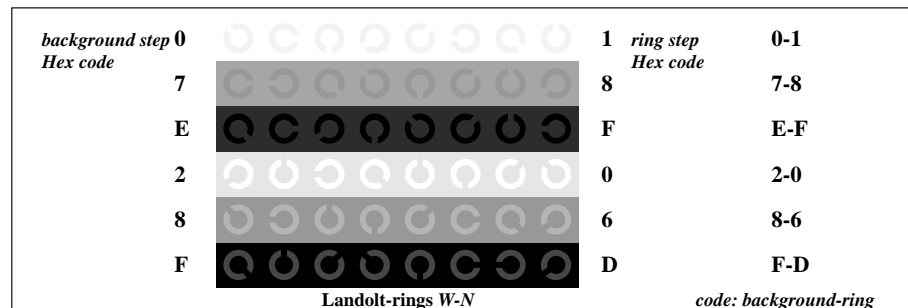

Picture C4: Landolt-rings W-N; PS operator: *w\*lin 1.0 exp setgray*

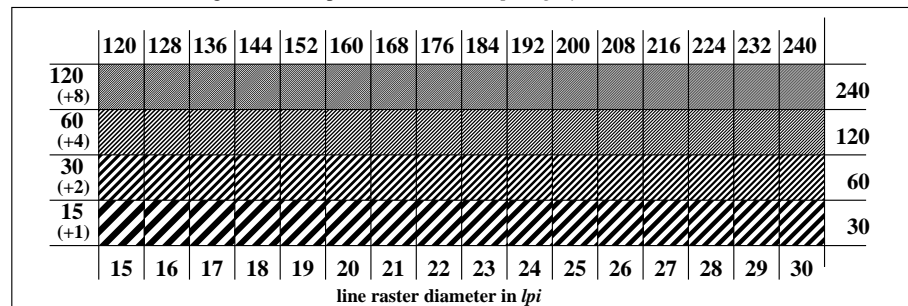

Picture C5: Line raster under 45° (or 135°); PS operator: *w\*lin 1.0 exp setgray*

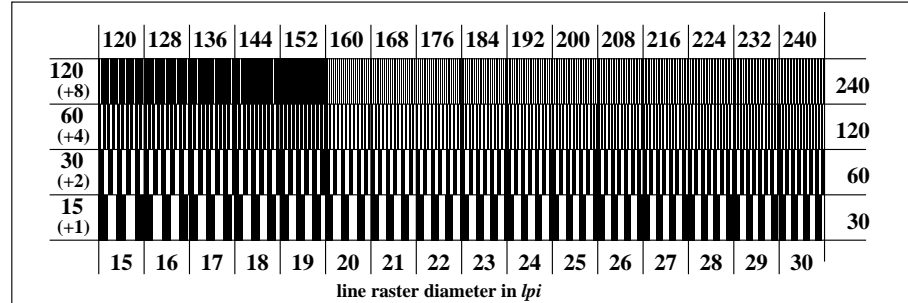

Picture C6: Line raster under 90° (or 0°); PS operator: *w\*lin 1.0 exp setgray*