





Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.:  $nnn0^*lin\ 1.0\ exp\ setcmykcolor$  Picture C5: Line raster under 45° (or 135°); PS operator:  $nnn0^*lin\ 1.0\ exp\ setcmykcolor$

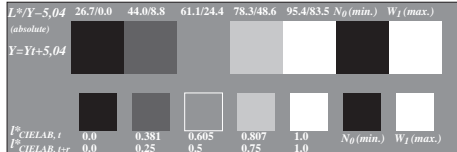


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_1$ ; PS operator:  $nnn0^*lin\ 1.0\ exp\ setcmykcolor$

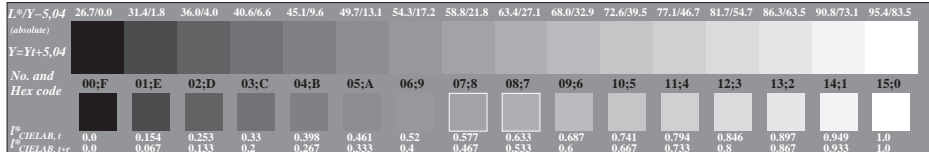


Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator:  $nnn0^*lin\ 1.0\ exp\ setcmykcolor$


ISO/IEC-test chart no. 3C according to ISO/IEC 15775 and DIS ISO/IEC 19839-X; input:  $nnn0^*lin\ 1.0\ exp\ setcmykcolor$   
output:  $cmy0^*/000n^*setcmykcolor$

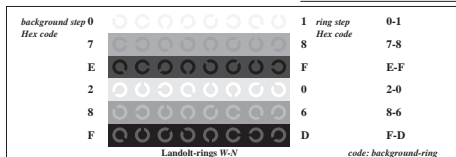

Picture C4: Landolt-rings W-N; PS operator:  $nnn0^*lin\ 1.0\ exp\ setcmykcolor$

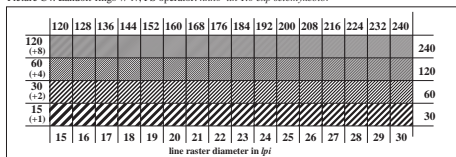

Picture C5: Line raster under 45° (or 135°); PS operator:  $nnn0^*lin\ 1.0\ exp\ setcmykcolor$

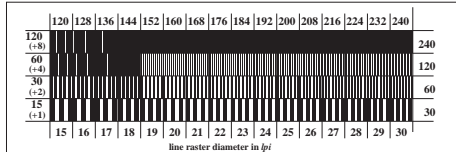

Picture C6: Line raster under 90° (or 0°); PS operator:  $nnn0^*lin\ 1.0\ exp\ setcmykcolor$