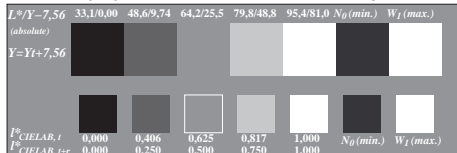
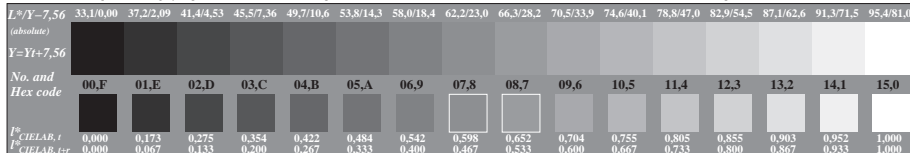
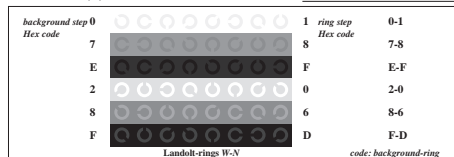
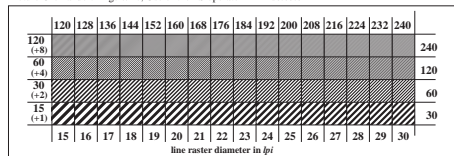
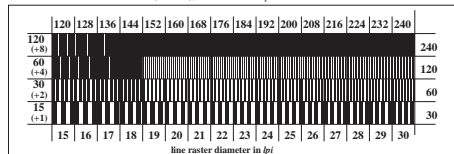
Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; Use of the PS operator LAB^* setcolorPicture C2: 5 visual equidistant L^* -gray steps + N_0 + W_1 ; Use of the PS operator LAB^* setcolorPicture C3: 16 visual equidistant L^* -gray steps; Use of the PS operator LAB^* setcolorPicture C4: Landolt-rings W-N; Use of the PS operator LAB^* setcolorPicture C5: Line raster under 45° (or 135°); Use of the PS operator LAB^* setcolorPicture C6: Line raster under 90° (or 0°); Use of the PS operator LAB^* setcolor

Fig. C1 to C6 of ISO/IEC-test chart 3;

ISO/IEC 15775 and DIS ISO/IEC 19839-X; input: LAB^* setcolor
output: $cmY0^*/000n^*$ setcmYkcolor