

Siehe ähnliche Dateien: <http://www.ps.bam.de/IG87/>  
Information, Bestellung: <http://www.ps.bam.de> Versi-

The diagram shows a circular pattern of black lines forming a radial grid. It consists of 10 radial lines originating from a central point. Each radial line is divided into 3 segments by vertical lines, creating a total of 30 angular segments. The segments are widest at the center and narrowest at the outer edge.

The diagram shows a circular grid divided into 30 equal sectors, radiating from a central point. The segments are shaded in a gradient from light gray to dark gray. The number '30' is printed at the bottom right of the grid.

The diagram shows a circular grid divided into sectors. The innermost circle is divided into 10 equal sectors. The next ring out is divided into 20 equal sectors. The outermost ring is divided into 30 equal sectors. The sectors are shaded in a dark gray color.

Bild C1: Radialgitter (Siemenssterne)  $N-W$ ,  $W-N$ ,  $N-Z$  und  $W-Z$ ; PS-Operator:  $w^*lin\;1.0\;exp\;setgray$

Bild C2: 5 visuell gleichabständige  $L^*$ -Graustufen +  $N(0, 1)$ ; PS-Operator:  $w \cdot \text{lin\_1.0\_exp\_setaray}$ .

$L^*/Y-7,56$	33.1/0.0	37.2/2.1	41.4/4.5	45.5/7.4	49.7/10.6	53.8/14.3	58.0/18.4	62.0
(absolut)								
$Y=Yt+7,56$								
<i>Nr. und Hex-Code</i>	00;F	01;E	02;D	03;C	04;B	05;A	06;9	07;8
$l^*_{CIELAB, t}$	0.0	0.173	0.275	0.354	0.422	0.484	0.542	0.600
$l^*_{CIELAB, t_{sr}}$	0.0	0.067	0.133	0.2	0.267	0.333	0.4	0.5

Bild C3: 16 visuell gleichabständige  $L^*$ -Graustufen; PS-Operator:  $w^*lin\ 1.0\ exp\ setgray$

ISO/IEC 15775 und input:  $w^*lin\ 1.0\ exp\ setgray$   
DIS ISO/IEC 19839-X; output:  $LAB^*\ setcolor$

<i>Umfeldstufe</i>	<b>0</b>		<i>Ringstufe</i>	<b>0-1</b>
<i>Hex-Code</i>			<i>Hex-Code</i>	
	<b>7</b>		<b>8</b>	<b>7-8</b>
	<b>E</b>		<b>F</b>	<b>E-F</b>
	<b>2</b>		<b>0</b>	<b>2-0</b>
	<b>8</b>		<b>6</b>	<b>8-6</b>
	<b>F</b>		<b>D</b>	<b>F-D</b>

Bild C4: Landoltringe W-N; PS-Operator:  $w^*lin\ 1.0\ exp\ setgray$





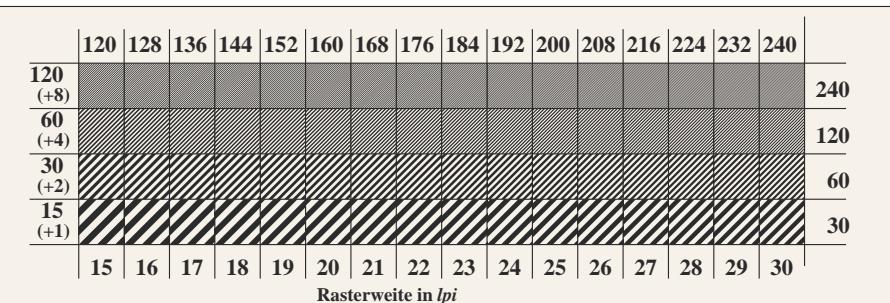


Bild C5: Linienraster unter  $45^\circ$  (oder  $135^\circ$ ); PS-Operator: `w*lin 1.0 exp setgray`

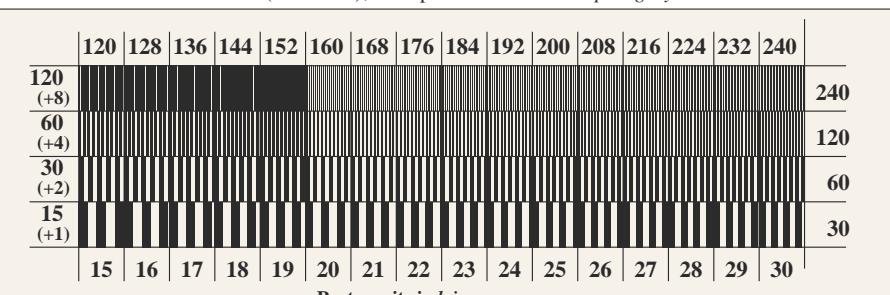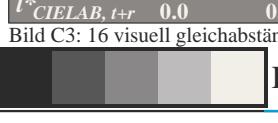

Rasterweite in lpi



ISO/IEC-Prüfvorlage Nr. 3D nach

ISO/IEC 15775 und input: *w\*lin 1.0 exp setgray*  
DIS ISO/IEC 19839-X; output: *LAB\* setcolor*