




Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N




Radial grating (Siemens-star) N-Z



Radial grating (Siemens-star) W-Z

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: 000n*lin 1.0 exp setcmykcolor

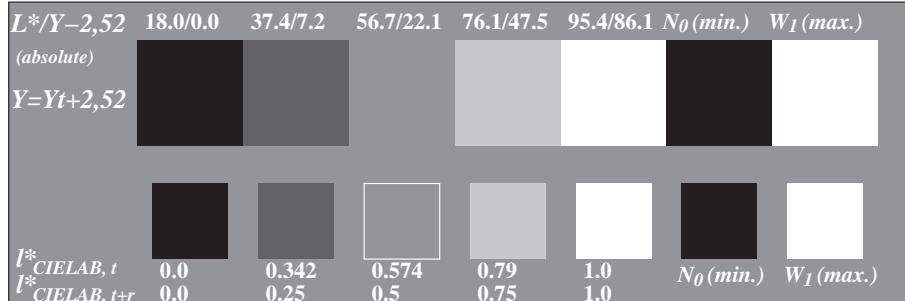

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_I ; PS operator: 000n*lin 1.0 exp setcmykcolor




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n*lin 1.0 exp setcmykcolor; use file www.bam.de/KE86/10B/B86E00FA.PS or /B86E00FP.PS/.PDF for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3B according to ISO/IEC 15775 and input: 000n*lin 1.0 exp setcmykcolor
DIS ISO/IEC 19839-X; output: cmy0* / 000n* setcmykcolor

background step 0
Hex code

7
E
2
8
F

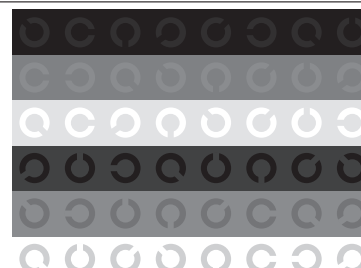


Landolt-rings W-N

ring step 0-1
Hex code


8
F
0
6
D

code: background-ring

Picture C4: Landolt-rings W-N; PS operator: 000n*lin 1.0 exp setcmykcolor

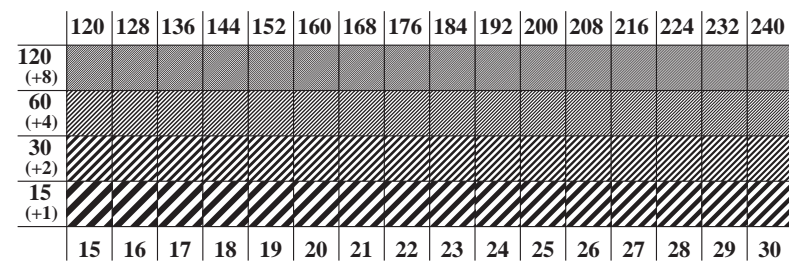

Picture C5: Line raster under 45° (or 135°); PS operator: 000n*lin 1.0 exp setcmykcolor

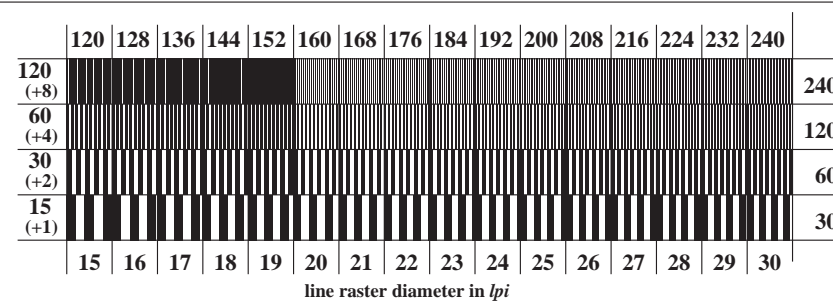

Picture C6: Line raster under 90° (or 0°); PS operator: 000n*lin 1.0 exp setcmykcolor