



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: 000n\*lin 1.0 exp setcmykcolor

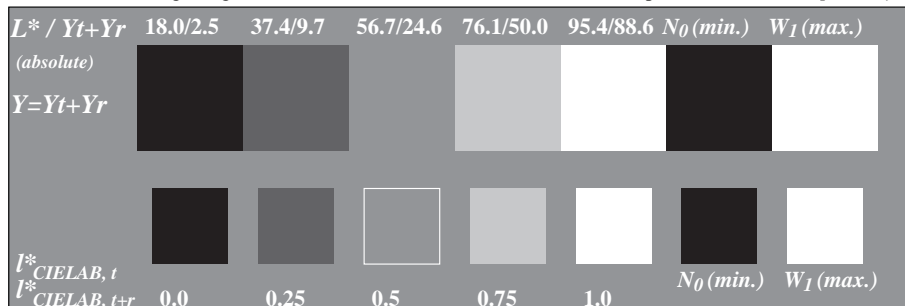


Picture C2: 5 visual equidistant L\*-grey steps + N0 + W1; PS operator: 000n\*lin 1.0 exp setcmykcolor




Picture C3: 16 visual equidistant L\*-grey steps; PS operator: 000n\*lin 1.0 exp setcmykcolor; use file www.bam.de/KE86/10B/B86E00SA.PS or /B86E00SP.PS/.PDF for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3B according to ISO/IEC 15775 and input: 000n\*lin 1.0 exp setcmykcolor  
DIS ISO/IEC 19839-X; output: Startup (S) data dependend

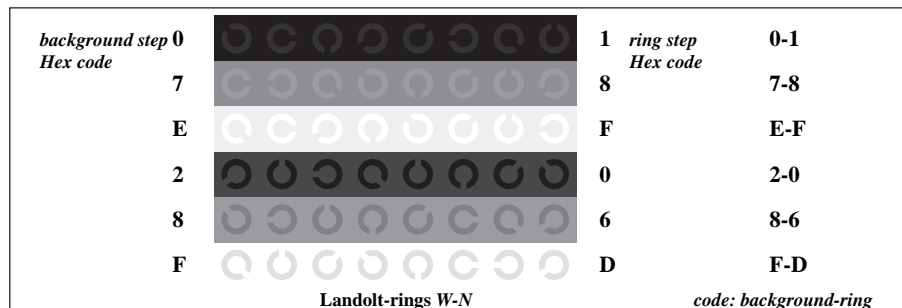

Picture C4: Landolt-rings W-N; PS operator: 000n\*lin 1.0 exp setcmykcolor

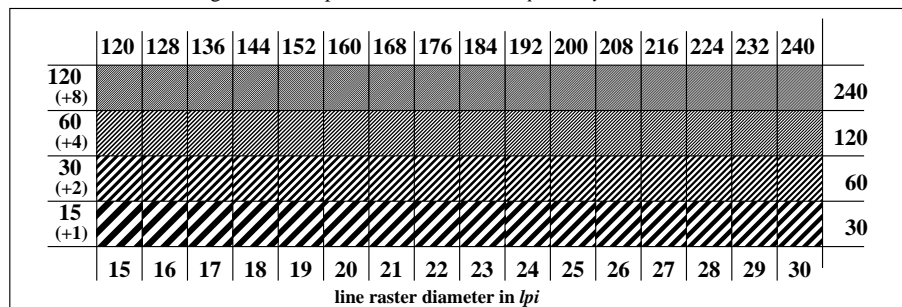

Picture C5: Line raster under 45° (or 135°); PS operator: 000n\*lin 1.0 exp setcmykcolor

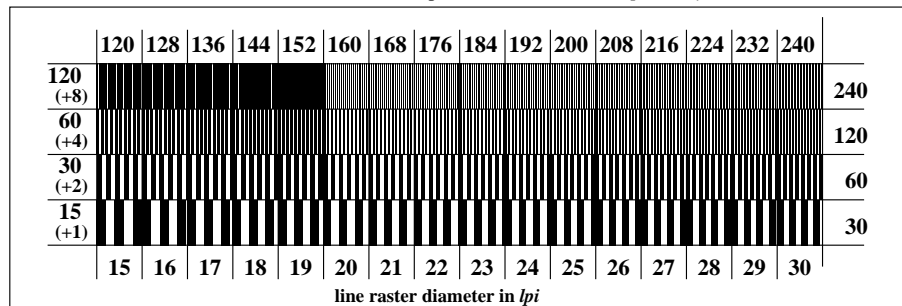

Picture C6: Line raster under 90° (or 0°); PS operator: 000n\*lin 1.0 exp setcmykcolor