





Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: 000n*lin 1.0 exp setcmykcolor

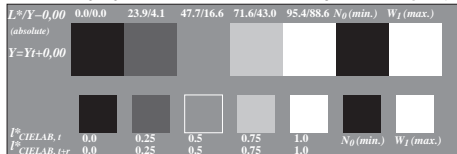

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: 000n*lin 1.0 exp setcmykcolor




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n*lin 1.0 exp setcmykcolor; use file www.bam.de/IE86/10A/A86E00FA.PS or /A86E00FP.PS/PDF for DPS or PDF systems to complete the figure




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: 000n*lin 1.0 exp setcmykcolor; use file www.bam.de/IE86/10A/A86E00FA.PS or /A86E00FP.PS/PDF for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3A according to ISO/IEC 15775 and DIS ISO/IEC 19839-X; input: 000n*lin 1.0 exp setcmykcolor output: cmy0* / 000n* setcmykcolor

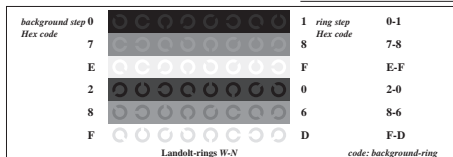


Picture C4: Landolt-rings W-N; PS operator: 000n*lin 1.0 exp setcmykcolor

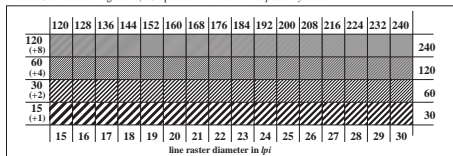

Picture C5: Line raster under 45° (or 135°); PS operator: 000n*lin 1.0 exp setcmykcolor

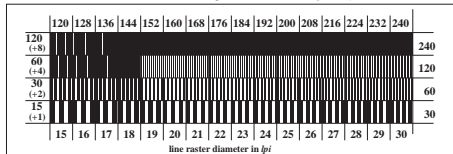

Picture C6: Line raster under 90° (or 0°); PS operator: 000n*lin 1.0 exp setcmykcolor



Picture C6: Line raster under 90° (or 0°); PS operator: 000n*lin 1.0 exp setcmykcolor



Picture C6: Line raster under 90° (or 0°); PS operator: 000n*lin 1.0 exp setcmykcolor