




Radial grating (Siemens-star) N-W



Radial grating (Siemens-star) W-N

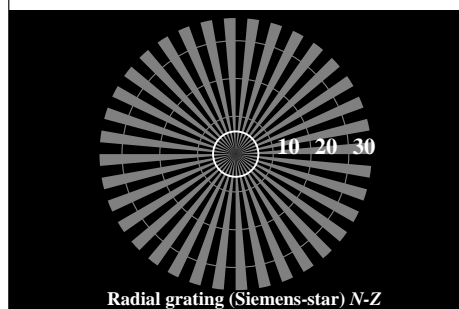


Radial grating (Siemens-star) N-Z




Radial grating (Siemens-star) W-Z

Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: *w*lin 1.0 exp setgray*

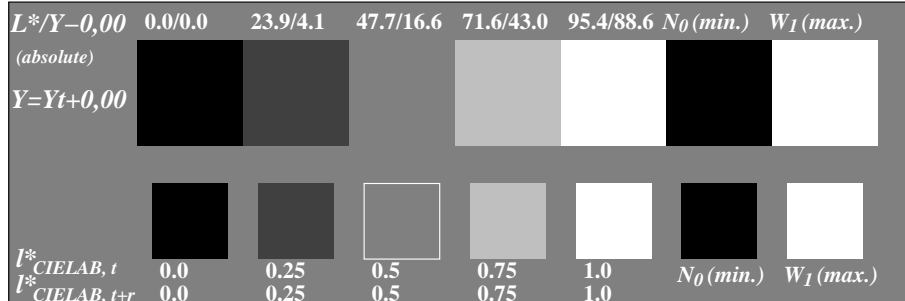

Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_1 ; PS operator: *w*lin 1.0 exp setgray*




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: *w*lin 1.0 exp setgray*; use file www.bam.de/KE87/10A/A87E00NA.PS or [/A87E00NP.PS](http://www.bam.de/A87E00NP.PS) for DPS or PDF systems to complete the figure

ISO/IEC-test chart no. 3A according to ISO/IEC 15775 and input: *w*lin 1.0 exp setgray*
DIS ISO/IEC 19839-X; output: *w*lin 1.0 exp setgray*


background step 0		1 ring step	0-1
Hex code		Hex code	
7		8	7-8
E		F	E-F
2		0	2-0
8		6	8-6
F		D	F-D

Landolt-rings W-N code: background-ring

Picture C4: Landolt-rings W-N; PS operator: *w*lin 1.0 exp setgray*

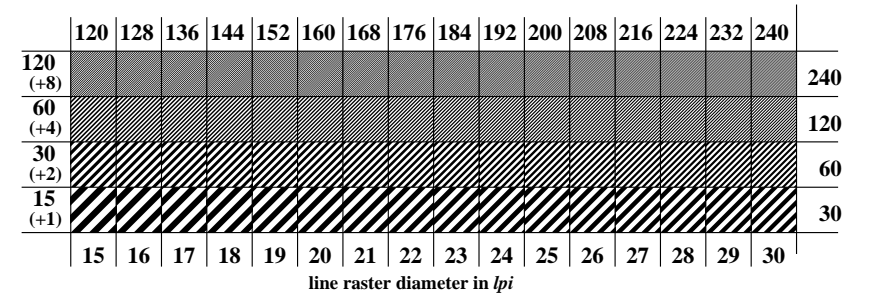

Picture C5: Line raster under 45° (or 135°); PS operator: *w*lin 1.0 exp setgray*

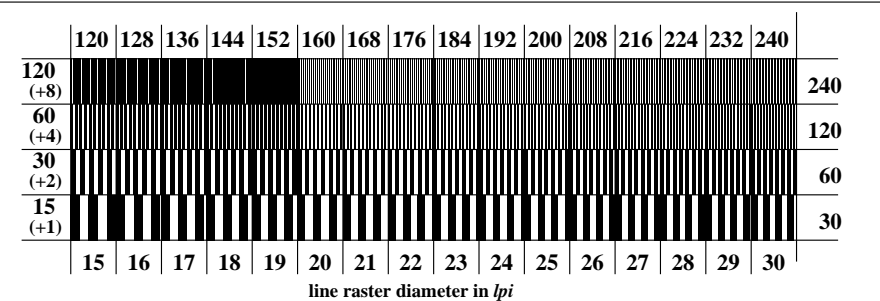

Picture C6: Line raster under 90° (or 0°); PS operator: *w*lin 1.0 exp setgray*