





Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: w*lin 1.0 exp setgray

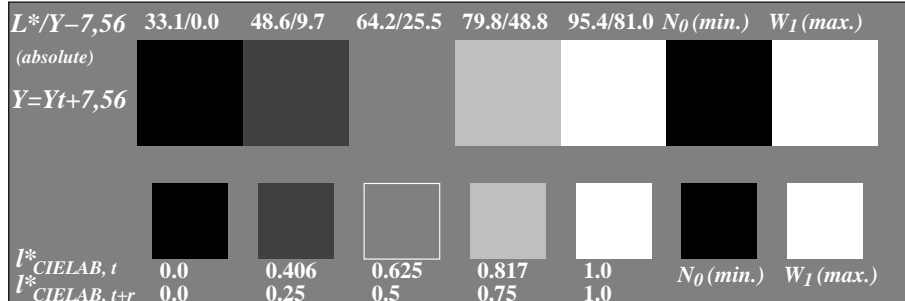


Picture C2: 5 visual equidistant L^* -grey steps + N_0 + W_I ; PS operator: w*lin 1.0 exp setgray




Picture C3: 16 visual equidistant L^* -grey steps; PS operator: w*lin 1.0 exp setgray; use file www.bam.de/KE87/10D/D87E00NA.PS or [/D87E00NP.PS](http://www.bam.de/10D/D87E00NP.PS) for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3D according to ISO/IEC 15775 and input: w*lin 1.0 exp setgray
DIS ISO/IEC 19839-X; output: w*lin 1.0 exp setgray

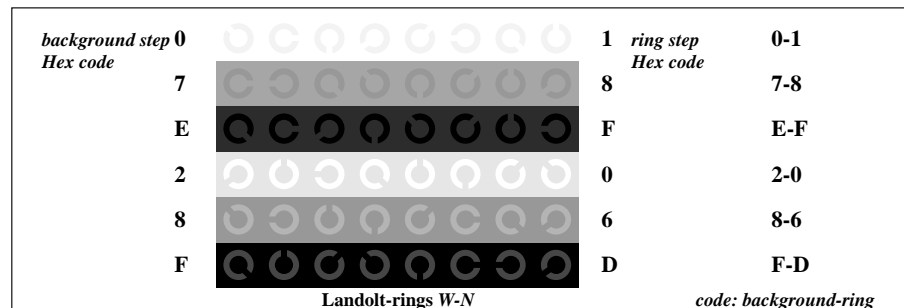

Picture C4: Landolt-rings W-N; PS operator: w*lin 1.0 exp setgray

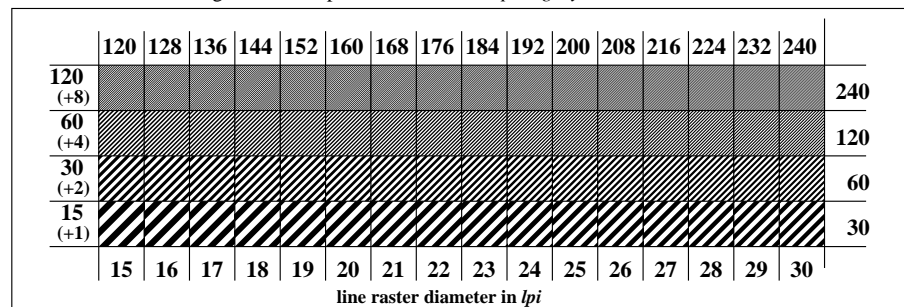

Picture C5: Line raster under 45° (or 135°); PS operator: w*lin 1.0 exp setgray

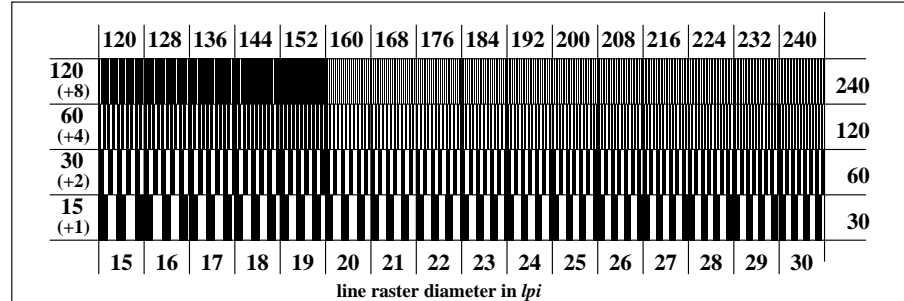

Picture C6: Line raster under 90° (or 0°); PS operator: w*lin 1.0 exp setgray