



Picture C1: Radial gratings (Siemens-stars) N-W, W-N, N-Z and W-Z; PS oper.: `www*lin 1.0 exp setrgbcolor`

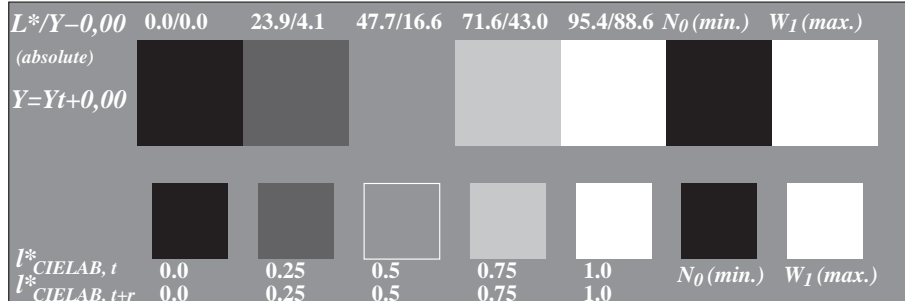


Picture C2: 5 visual equidistant  $L^*$ -grey steps +  $N_0$  +  $W_I$ ; PS operator: `www*lin 1.0 exp setrgbcolor`




Picture C3: 16 visual equidistant  $L^*$ -grey steps; PS operator: `www*lin 1.0 exp setrgbcolor`; use file `www.bam.de/KE89/10A/A89E00FA.PS` or `/A89E00FP.PS/.PDF` for DPS or PDF systems to complete the figure


ISO/IEC-test chart no. 3A according to ISO/IEC 15775 and input: `www*lin 1.0 exp setrgbcolor`  
DIS ISO/IEC 19839-X; output: `cmy0* / 000n* setcmykcolor`

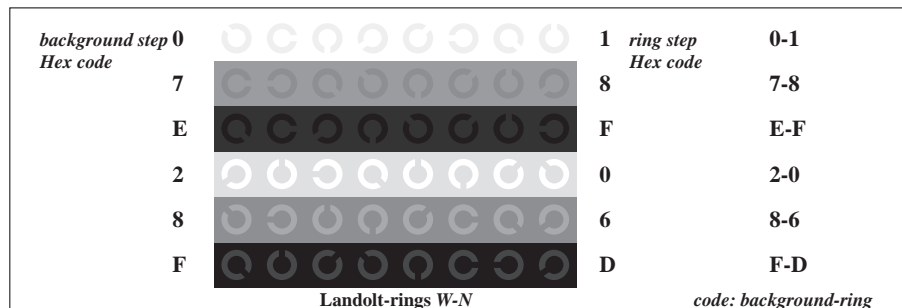

Picture C4: Landolt-rings W-N; PS operator: `www*lin 1.0 exp setrgbcolor`

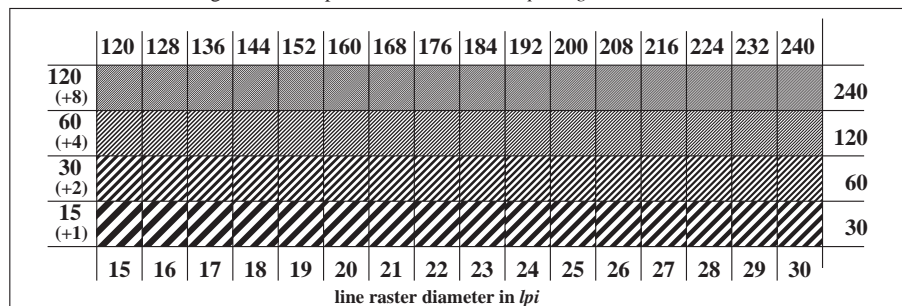

Picture C5: Line raster under 45° (or 135°); PS operator: `www*lin 1.0 exp setrgbcolor`

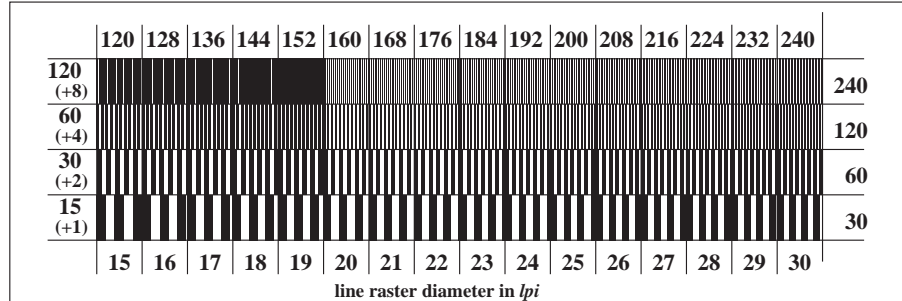

Picture C6: Line raster under 90° (or 0°); PS operator: `www*lin 1.0 exp setrgbcolor`